

Abnormal or unusual residual risks associated with the design outcomes shown on this drawing are:-

RSK LDE LTD has followed its Design Risk Management process for Hazard Elimination and Risk reduction in developing the designs shown on this drawing.
Abnormal or unusual residual risks may be shown above where it is considered that such risk may not normally be expected by competent persons engaged on work of this nature or type.

Notes:

- This drawing is to be read in conjunction with the Standard Details, the layouts, schedules and specification for this project.
- All adoptable drainage to be constructed in conjunction with Design and Construction Guidance for Drainage or as stipulated in Southern Water Addendum.
- For guidance on types and distances of proposed trees away from adoptable sewers refer Design and Construction Guidance for Drainage Restrictions On Tree Planting Adjacent To Sewers.
- A +1% gradient represents a rise of 1m in 100m.
- Left and right hand channels are on the left and right hand side respectively, when standing at zero chainage and looking along the road.
- A level at any point 'X'm from the start of a vertical curve is given by the formula:-
Level @ 'X' = Level at start of the curve + $\frac{AX}{100} - \frac{BX}{200}$
where A and B are the gradients at the start and end of the curve respectively and having the algebraic signs +, -.
- LHG and RHG indicates a left and right hand gully respectively.
- Pipe sizes are stated in millimetres and levels are shown in metres A.O.D.
- All pipes to have flexible joints with granular bedding (Class S) unless stated otherwise. Where 150mm concrete bed and surround is specified the concrete must be broken at the joint positions by the insertion of a 'flexcell' collar.
- Connections to existing sewers are to be "SOFFIT TO SOFFIT" unless noted otherwise.
- All concrete pipes to be CLAS 'M' All clay pipes shall comply with BS EN 295-1 crushing strengths and shall have a minimum crushing strength of 34KN/m. All Concrete pipes 300mm and above shall be class 120 and have a minimum crushing strength of 38KN/m
- 12.'MV' is equal to the rate of change of gradient and is calculated from the formula:-
MV = $100 \cdot \frac{(A-B)}{L}$ where A and B are as in Note 4 above.
- Existing levels to be confirmed on site prior to commencement of works.

P03	13.12.2024	Issued for PLANNING RESUBMISSION	SB	GXA	RD
P02	25.10.2024	Issued for PLANNING	SH	GXA	RD
P01	20.09.2024	Preliminary Issue	LN	GXA	RD
Rev.	Date	Amendment	Drawn	Chkd.	Appd.



Abbey Park
Hilsea Road
Coventry
CV3 4AQ
United Kingdom

Tel: +44 (0) 24 7690 5000
Fax: +44 (0) 24 7690 1417
Email: info@rsk.co.uk
Web: www.rsk.co.uk

Client BARRATT DAVID WILSON
(SOUTHERN COUNTIES)

Project Title NEW PLACE FARM
PULBOROUGH
WEST SUSSEX


Status PLANNING

Drawing Title LONG SECTION
ROADS 25, 26 AND 27

Drawn Date	Checked Date	Approved Date
LN	GXA	RD
09.24	09.24	09.24
Scale 1:500	Orig Size A1	Dimensions m
Project No. 890815	Drawing File 890815-RSK-ZZ-XX-DR-C-8013 to 8022 Long Sections.dwg	
Drawing No. 890815	Rev. P03	
Project Orig Vol/Sys. Lev/Loc. Type Role Draw. No.		
Scale 1:500	0 5 10 15 20 25m	

ROAD24		ROAD23	
CHAINAGE			
EXISTING GROUND LEVEL			
ALIGNMENT LEVEL			
VERTICAL ALIGNMENT	G= 1.986% 1: 50.4		
HORIZONTAL ALIGNMENT			
LEFT HAND CHANNEL			
RIGHT HAND CHANNEL			
STORMWATER COVER LEVEL			
STORMWATER INVERT			
STORMWATER DETAILS	Pipe 2.000 Dia 225 Circular CLAY 1 in 83	Pipe 1.000 Dia 225 Circular CLAY 1 in 14	
STORMWATER LENGTHS	18.859	16.614	

ROAD25		ROAD24	
CHAINAGE			
EXISTING GROUND LEVEL			
ALIGNMENT LEVEL			
VERTICAL ALIGNMENT	G= -4.012% 1: -24.9		
HORIZONTAL ALIGNMENT			
LEFT HAND CHANNEL			
RIGHT HAND CHANNEL			
STORMWATER COVER LEVEL			
STORMWATER INVERT			
STORMWATER DETAILS		Pipe 13.000 Dia 225 Circular CLAY 1 in 18	Pipe 13.001 Dia 225 Circular CLAY 1 in 23
STORMWATER LENGTHS		25.298	15.298
FOULWATER COVER LEVEL			
FOULWATER INVERT			
FOULWATER DETAILS		Pipe 1.004 Dia 150 Circular CLAY 1 in 33	Pipe 1.005 Dia 150 Circular CLAY 1 in 12
FOULWATER LENGTHS		31.063	33.010

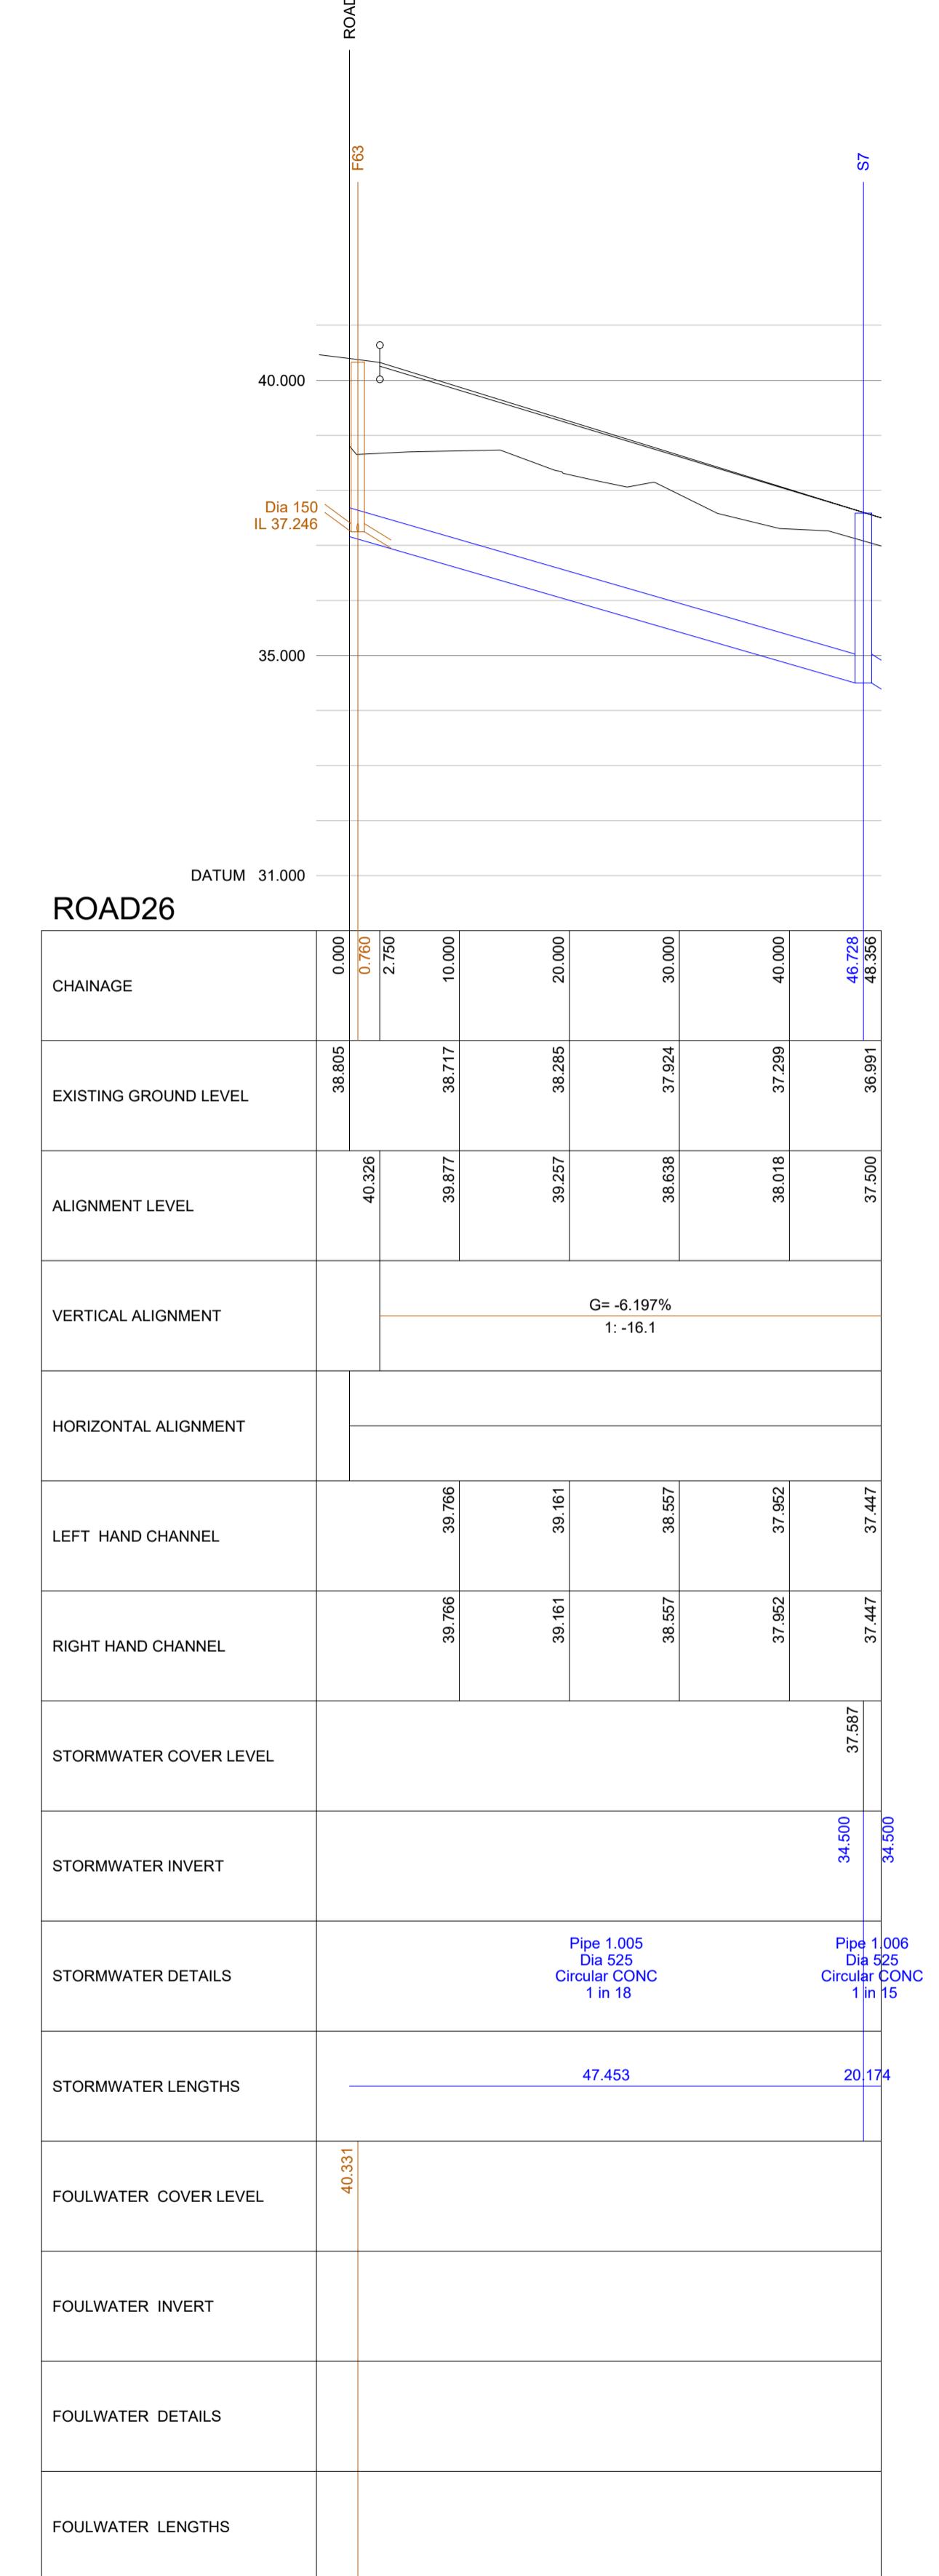

ROAD27		ROAD26	
CHAINAGE			
EXISTING GROUND LEVEL			
ALIGNMENT LEVEL			
VERTICAL ALIGNMENT	G= -6.197% 1: -16.1		
HORIZONTAL ALIGNMENT			
LEFT HAND CHANNEL			
RIGHT HAND CHANNEL			
STORMWATER COVER LEVEL			
STORMWATER INVERT			
STORMWATER DETAILS		Pipe 1.005 Dia 525 Circular CONC 1 in 18	Pipe 1.006 Dia 525 Circular CONC 1 in 15
STORMWATER LENGTHS		47.453	20.174
FOULWATER COVER LEVEL			
FOULWATER INVERT			
FOULWATER DETAILS			
FOULWATER LENGTHS			

Drawn Date	Checked Date	Approved Date
LN	GXA	RD
09.24	09.24	09.24
Scale 1:500	Orig Size A1	Dimensions m
Project No. 890815	Drawing File 890815-RSK-ZZ-XX-DR-C-8013 to 8022 Long Sections.dwg	
Drawing No. 890815	Rev. P03	
Project Orig Vol/Sys. Lev/Loc. Type Role Draw. No.		
Scale 1:500	0 5 10 15 20 25m	