
Drainage Key

- (150Ø 1:100) — Existing Surface Water Sewer
- 150Ø 1:100 1.001 — Proposed Adoptable Surface Water Sewer
- Adoptable Surface Water Manhole
- Adoptable Surface Water Type 3 Inspection Chamber
- GU's — Surface Water Gully & Connection
- 150Ø 1:100 — Proposed Private Surface Water Sewer
- Private Surface Water Manhole
- Private Surface Water Ø600mm PPIC
- Private Surface Water Ø450mm PPIC
- RE — Rodding Eye
- RWP — Rain Water Pipe Position
- YG — Yard Gully
- Linear Drainage Aco Channel
- Concrete Dished Channel with Yard Gully
- Granular Trench / French Drain
- Retaining Wall Drainage 100mm dia
- Permeable Block Paving
- Below Ground Storage Tank
- (150Ø 1:100) — Existing Foul Water Sewer
- 150Ø 1:100 1.001 — Proposed Adoptable Foul Water Sewer
- Adoptable Foul Water Manhole
- Adoptable Foul Water Type 3 Inspection Chamber
- 150Ø 1:100 — Proposed Private Foul Water Sewer
- Private Foul Water Manhole
- Private Foul Water Ø600mm PPIC
- Private Foul Water Ø450mm PPIC
- Private Foul Water Ø250mm PPIC
- SVP — Soil Vent Pipe Position
- G — Foul Water Gully
- Site Boundary
- Existing ditch
- Existing Ditch Removed / Stopped
- Heras Fencing - RPA
- RW — Retaining Wall

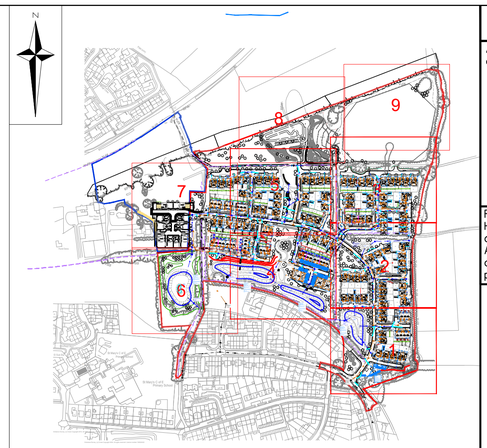

For Continuation see insert above right

+(44.75) +(44.39) +(44.50) +(44.00) +(43.50) +(43.35) +(43.775) +(43.86) +(43.54) BCP

+(50.30) +(49.79) +(48.92) +(47.50) +(46.60) +(46.00) +(45.50) +(45.00) +(52.30) +(52.30) +(62.00) +(51.30) +(50.50) +(50.40) +(51.00)

Kickabout Area

Earth Bunding

Play Area with Earth Bunding as a Feature

Earth Bunding

+(44.80) +(45.52) +(45.72) +(45.97) +(46.18) IL45.650 +(46.50) 2x300Ø @ 1:180 IL45.700 +(47.47) BCP RW 0.900

CIVIL / STRUCTURAL DESIGN RISK MANAGEMENT

Abnormal or unusual residual risks associated with the design outcomes shown on this drawing are:–

RSK LDE LTD has followed its Design Risk Management process for Hazard Elimination and Risk reduction in developing the designs shown on this drawing.
Abnormal or unusual residual risks may be shown above where it is considered that such risk may not normally be expected by competent persons engaged on work of this nature or type.

Notes:

1. This drawing presents the drainage layout for H9376 (890815).
2. Existing level information taken from NJC Survey topographical survey drawing number S1572/02 dated 18.03.2019.
3. The existing drainage information shown on this drawing is taken from Southern Water.
4. The general site layout and plot positions shown are taken from Architect - Architectectural Design Lab Substructure Plans dated Aug 2025. The plot locations are positioned by LDE.
5. Ground conditions assessed in the site investigation report.
6. This drawing is to be printed in COLOUR.
7. House levels are Finished Floor Levels (FFL's).
8. Figures quoted next to manholes / rodding eyes are cover & invert level, in Metres AOD.
9. Footpaths are to be laid with a crossfall to allow drainage to soft landscaped areas.
10. This drawing is schematic for clarity, and where possible drains should be laid within 2m of houses, and connections kept as short as possible.
11. Where possible all drainage runs shall be kept a minimum of 4.0m from any existing tree that is to be retained.
12. This drawing has been prepared for House Drainage purposes only, and must not be used for House Setting Out.
13. All drainage design is subject to technical approval, no connections shall be made to any public sewers without written consent from the drainage authority.
14. The location of rain water pipes (RWP) are subject to confirmation by the Architect / Services Engineer.
15. The location of soil vent pipes (SVP) / stub stacks (SS) is subject to confirmation by the Architect / Services Engineer.
16. Where pipes pass under buildings, unless beam & block floors are used, they are to be surrounded in concrete.
17. All rest bends associated with stub stacks, soil vent pipes, wc connections and stub wastes are to be set with their inverts at 450mm below Finished Floor Level (FFL).
18. All drains and connections to be 100mm diameter, unless shown otherwise.
19. All branch drains, or connections, are to discharge to the collectors obliquely, and in the direction of the main flow.
20. All high void ratio attenuation units to be installed strictly in accordance with manufacturer's requirements.
21. For Drainage Construction Details refer to LDE drawing 324031 - 324032.

Rev.	Date	Amendment	Drawn	Chkd.	Appd.
C04	06.07.2026	Construction Issue after planning layout changes.	YP	AM	RD
C03	02.04.2026	Private drainage ammended to barret redrow and ploypipe arrangement.	YP	AM	APT
C02	20.03.2026	Issued for LLFA Preapp.	YP	AM	APT
C01	21.11.2025	Issued for CONSTRUCTION - Amended to suit comments on 28.10.25.	BP	GXA	APT

LDE
CIVILS | STRUCTURES | HYDROLOGY
an RSK company

Abbey Park
Humber Road
Coventry
CV3 4AQ
United Kingdom

Tel: +44 (0) 24 7650 5600
Fax: +44 (0) 24 7650 1417
Email: info@rsk.co.uk
Web: www.rsk.co.uk

Client: Barratt Redrow

Project Title:
NEW PLACE FARM
PULBOROUGH
WEST SUSSEX

Status: CONSTRUCTION

Drawing Title:
SITE DRAINAGE
SHEET 8

Drawn	Date	Checked	Date	Approved	Date
YP	01.10.25	RD	01.10.25	APT	01.10.25

Scale	Orig Size	Dimensions
1:250	A1	m

Project No.: H9376 (890815)
Drawing File: H9376_RSK_ZZ_XX_DR_CE_300021-300029_SiteDrainage.dwg
Drawing No.: H9376 | RSK | ZZ | XX | DR | C | 300028 | C04
Rev.

Project	Orig.	Vol./Sys.	Lev./Loc.	Type	Role	Draw. No.	

Scale 1:250
0 2.5 5 7.5 10 12.5m