

Technical Information

Our technical information section covers manufacturing limitations and detailed technical drawings. To most people the technical drawings don't make much sense, so if you have any questions our product experts will be more than happy to explain in more detail.

TECHNICAL SPECIFICATIONS


Front-to-back Dimensions:	128mm
Sill Options:	150mm / 210mm
Glazed Unit:	24mm Double Glazed
Standard U-Value:	1.4W/m²K
Thermal Upgrade:	1.2W/m²K
Air Tightness:	Class 4
Water Tightness:	Class 6A
Wind Load:	Class A3

MANUFACTURING LIMITATIONS


Minimum Width:	375mm
Minimum Height:	800mm
Maximum Width:	1500mm
Maximum Height:	3000mm

Please note, slide and tilt restrictions may apply on certain specifications.


KEY PROFILE SECTIONS

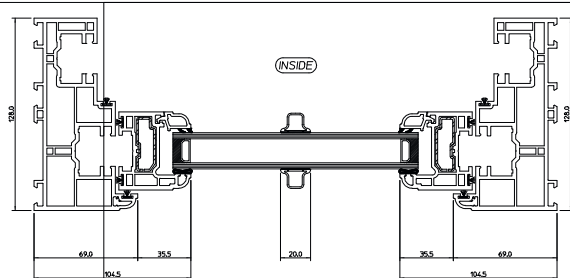




Downwards View - Bottom Sash

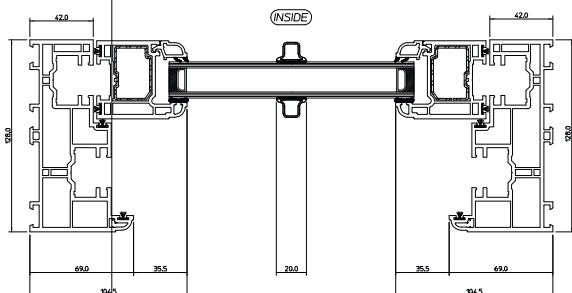




Downwards View - Top Sash

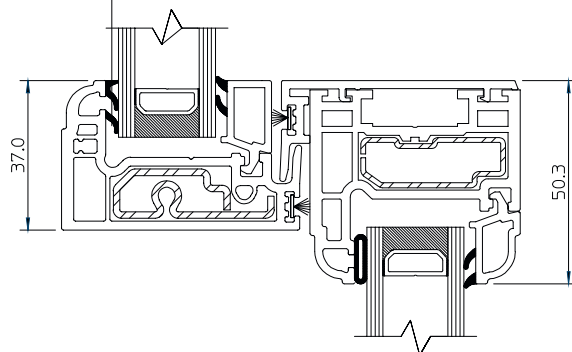

Sideways View - Slim Midrail

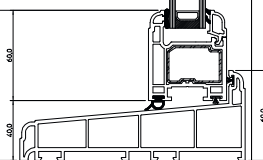

Sideways View - Standard Bottom Rail

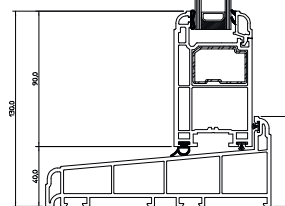

Sideways View - Deep Bottom Rail

The images, drawings and data shown in this brochure are for illustrative purposes only and are not binding in detail, colour, or specification. We reserve the right to make changes to the product specification as technical developments dictate and without prior notice.