


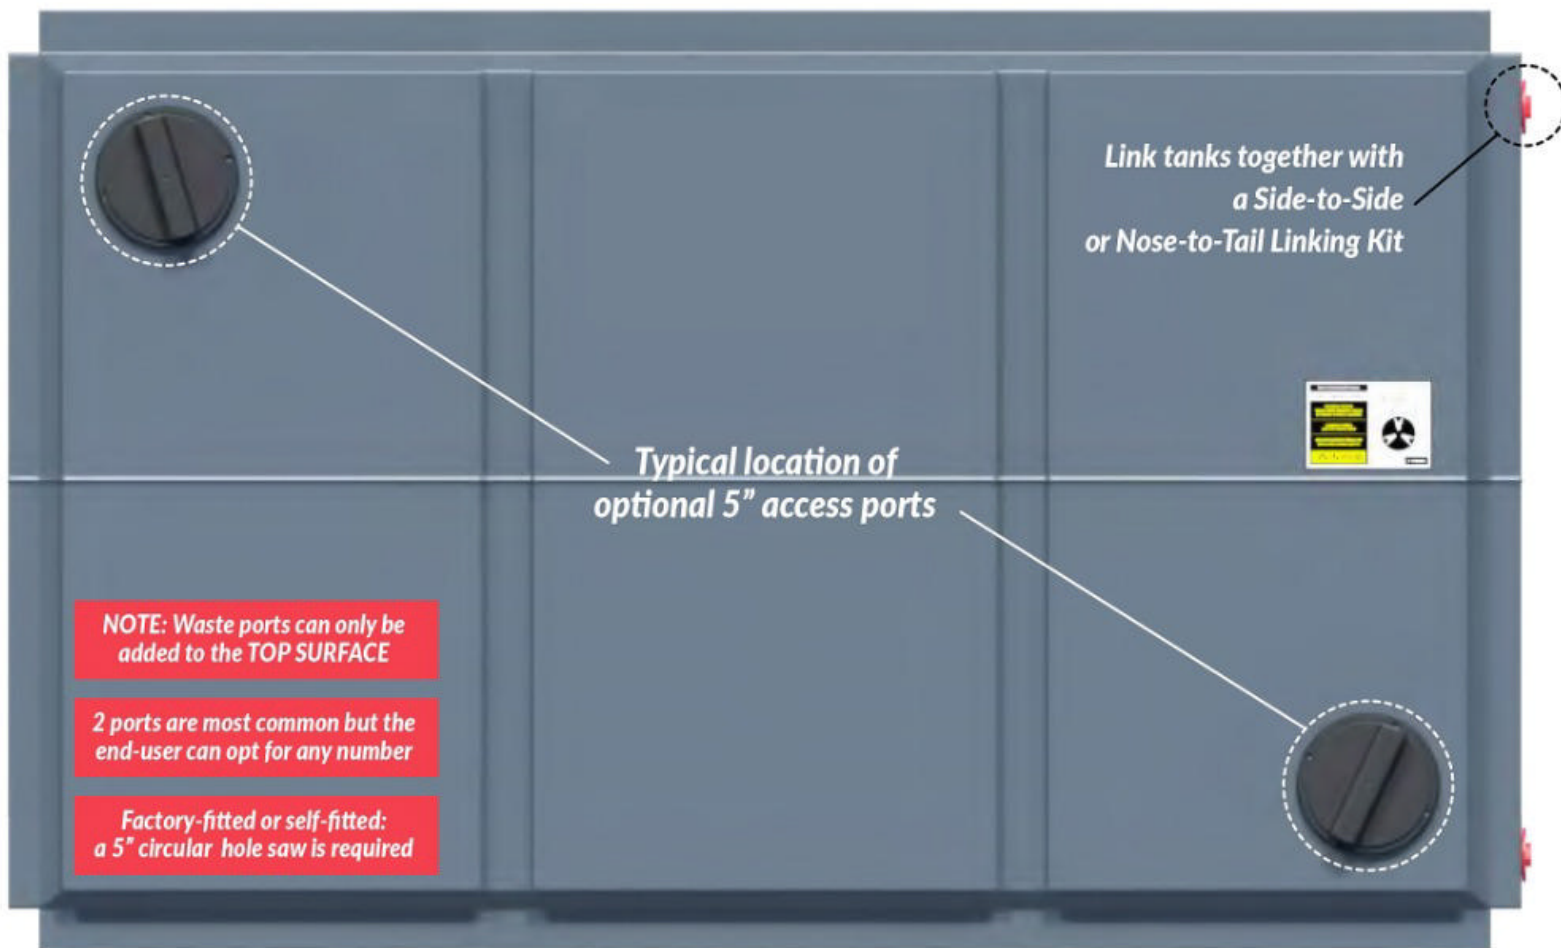

Link tanks together with
a Side-to-Side
or Nose-to-Tail Linking Kit

Typical location of
optional 5" access ports

NOTE: Waste ports can only be
added to the TOP SURFACE

2 ports are most common but the
end-user can opt for any number

Factory-fitted or self-fitted:
a 5" circular hole saw is required