


A2 Standard Letters - Non Illuminated



ID#	Sizes				
	A ^(w)	B ^(h)	C ^(d)	D	E
A2F.1 300mm	2408 ×	409 ×	81	300	60
A2F.2 400mm	3211 ×	545 ×	81	400	60
A2F.3 500mm	4013 ×	681 ×	81	500	60
A2F.4 600mm	4816 ×	817 ×	81	600	60

Description

Face illuminated fabricated letters mounted to masonry on rails for cable management.

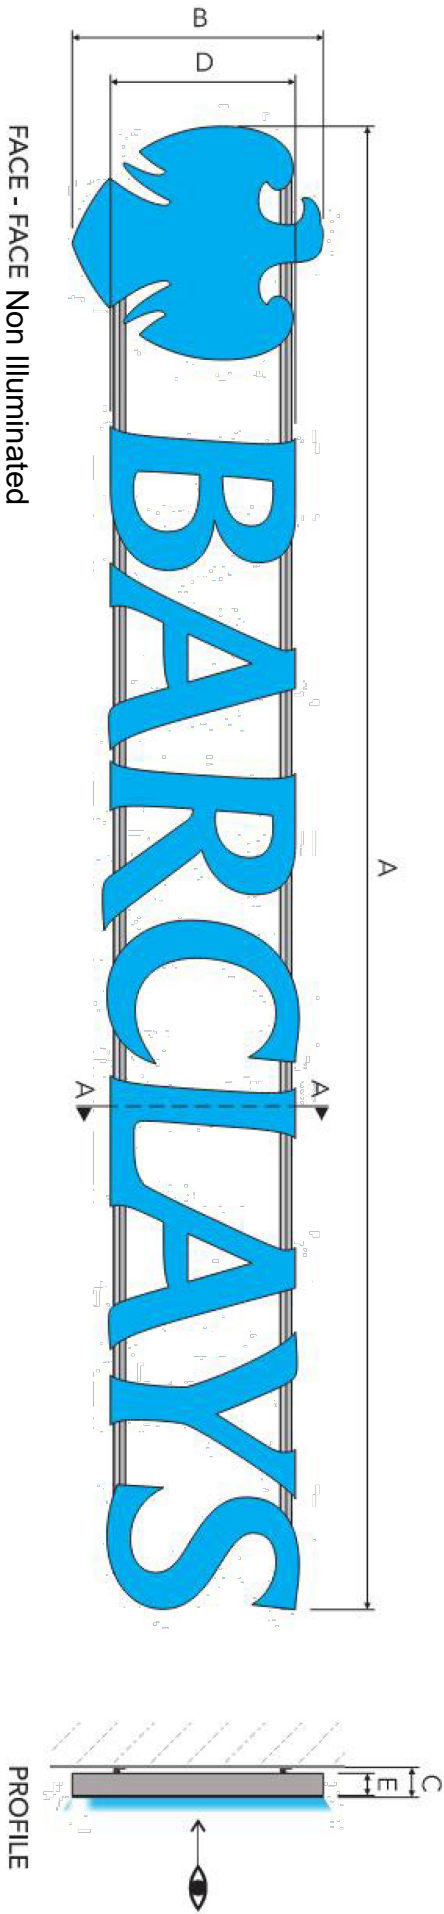


Specification

- 1 FACES from 5mm thick **M1** c/w router cut top-hat profile, fixed into RETURNS using 'Aqua Seal' type adhesive.
- 2 RETURNS from 2mm thick machine formed **M6/M8** to a depth of 60mm, all finished **P3**. Rear 'mirrored' set constructed as face set.
- 3 BACKS from 2.5mm thick **M5/M7** c/w inset 1.2mm **M6/M8** rim to a depth of 20mm to secure RETURNS and eliminate light leakage, all finished **P3**.
- 4 WIRING BARS from 'Baco Miscellaneous Section 929 (or equivalent) c/w anodised finish. Bars fixed to letter backs using M5 machine screws, washers and nuts.
- 5 ILLUMINATION Non Illuminated


- 6 FIXING METHOD to be wall mounted through WIRING BARS (with letter BACKS pre-fixed) using suitable fixings and wall plugs for site specific requirements. FACE units located over inset rim and fixed through RETURNS using suitable csk screw fixings c/w painted out heads.

NOTE:

Other letter and logo heights can be specified when none of the prescriptive sizes are deemed suitable

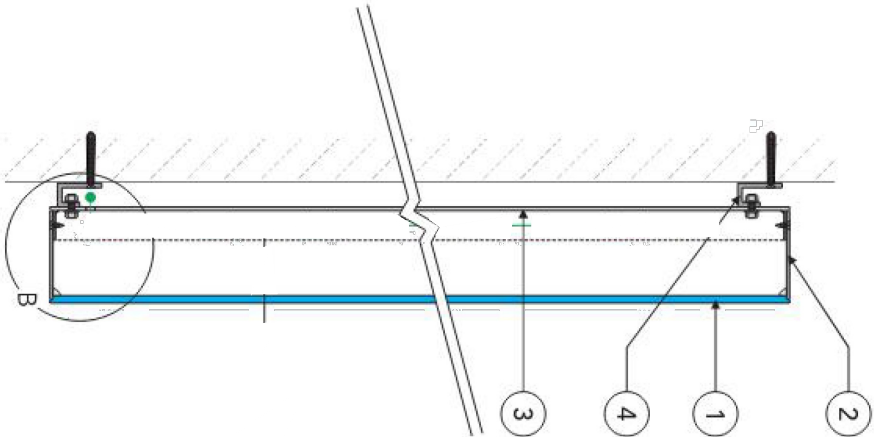

SECTION A-A 1:5

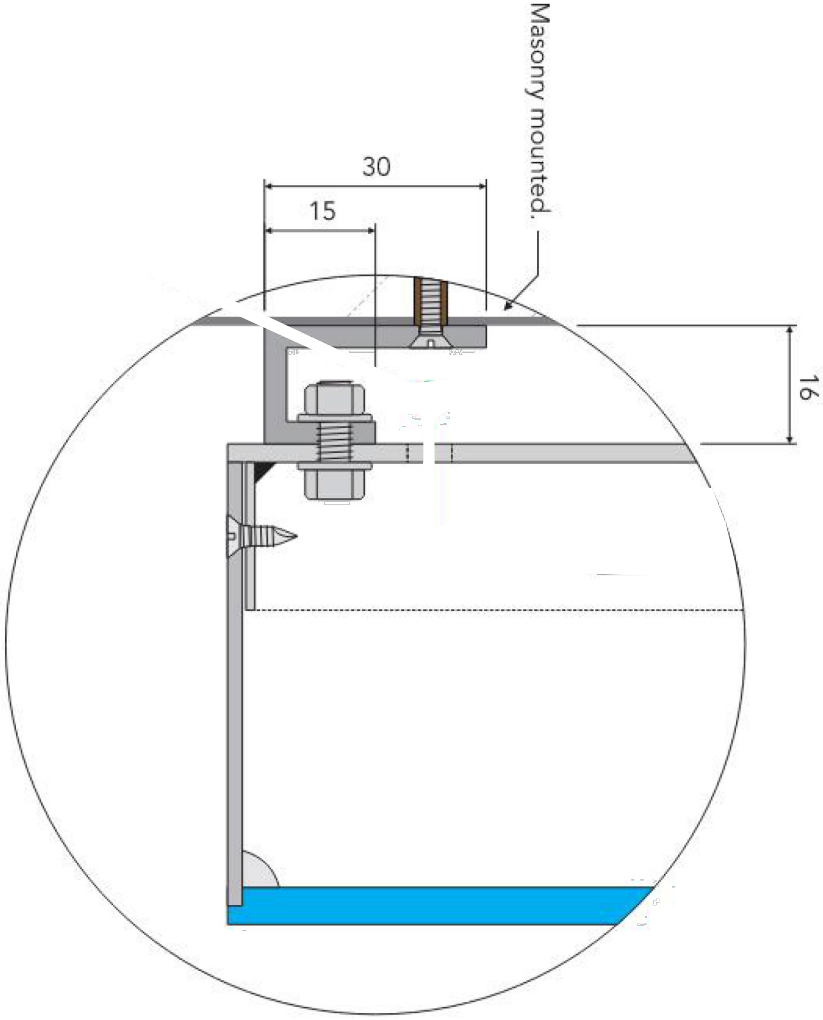

DETAIL B 1:1