


SINGLE STAKE SUPPORT METHOD

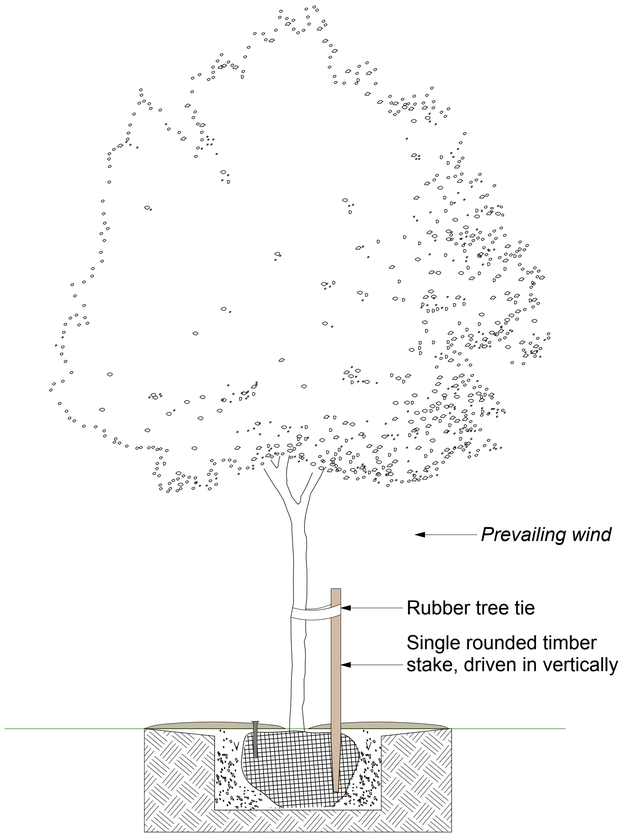

ANGLED STAKE SUPPORT METHOD

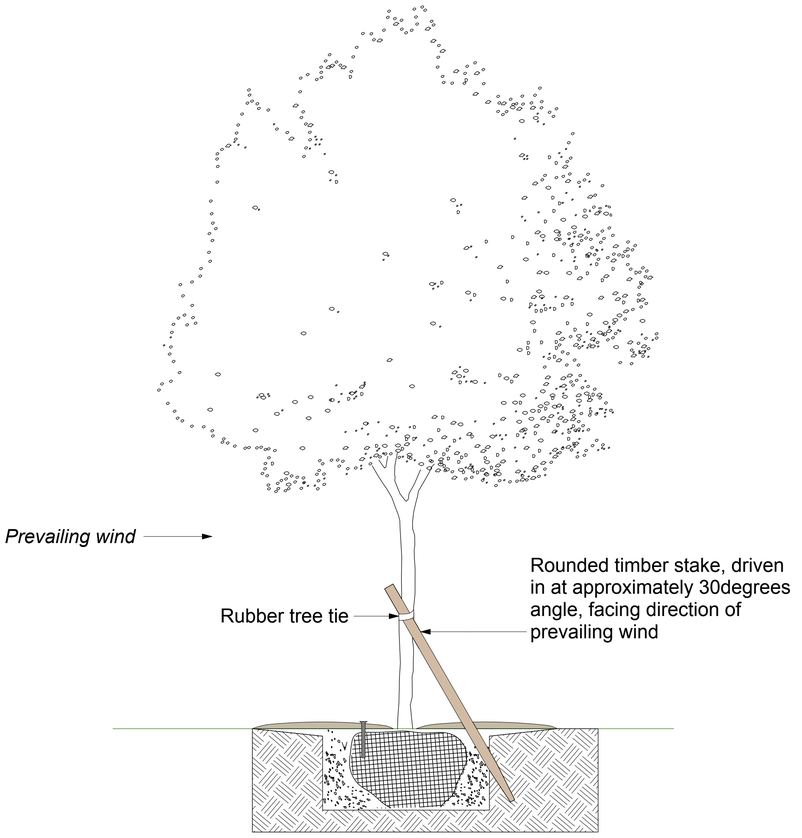

TREE PLANTING METHOD

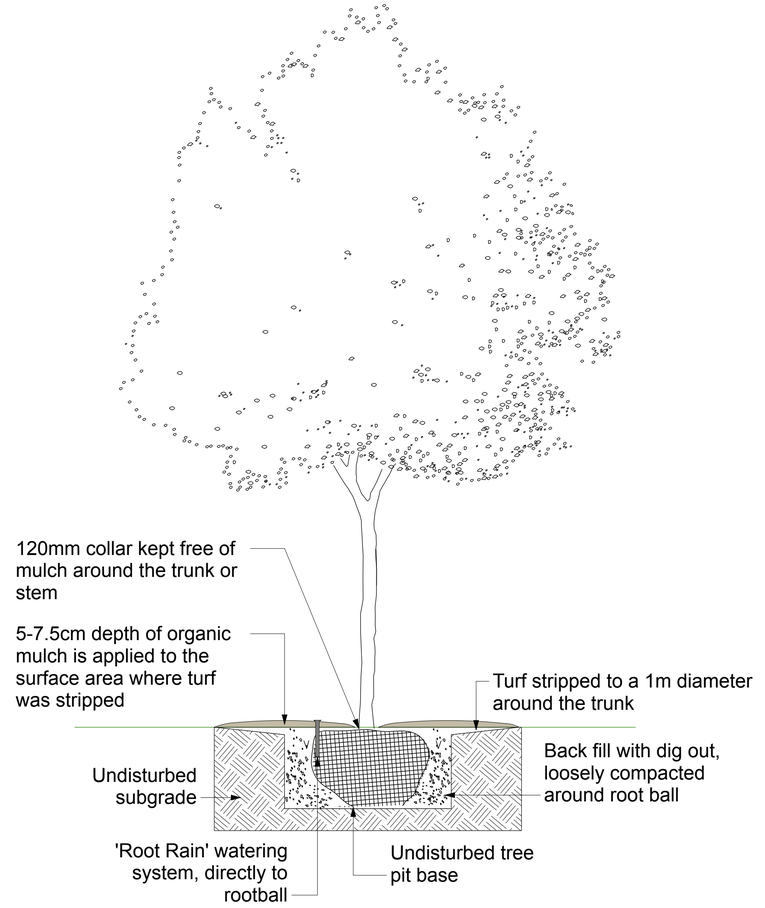

NOTES:

- Tree pit bases in all cases should be undisturbed

- Stakes, ties and guards should be checked regularly and adjusted, repaired or replaced and removed upon successful establishment

- Bases of trees and hedgerows to be hand weeded regularly, especially during the growing season.

- Using machinery to excavate tree pits can result in glazed side walls, which must be broken up prior to planting

- The outside of the container ball should be shaved with a spade or small saw prior to planting, to ensure all roots are facing laterally

- Bare root plants to be planted November - February. *Do not allow rootballs to dry out prior to planting*

- The surface of container / root ball should be 10mm proud of finished back-fill level, to accommodate mulch without burying the root flare

- All newly planted trees require a direct watering system, to ensure enough water reaches the rootball. Here we have suggested a widely available 'Root Rain system'

CHEMICAL FERTILISERS, PESTICIDES AND HERBICIDES INCLUDING GLYPHOSATE ARE NOT TO BE APPLIED AT ANY TIME due to impacts on hedgerows and the protection of their ecological features

DO NOT SCALE FROM THIS DRAWING

ALL MEASUREMENTS ARE TO BE CHECKED ON SITE PRIOR TO CONSTRUCTION

TITLE: TREE PLANTING AND STAKING METHODS	DRAWN BY: B. C. CHECKED BY: D. S.	bushy business GARDENS
DATE: 07/08/2025	CLIENT NAME & ADRESS: JEAN GORTON RUDGWICK, RH12 3DE	
SCALE: 1:25@ A1	DRAWING NUMBER ST004	