



Street Scene A-A




Street Scene B-B



Street Scene C-C



Street Scene D-D

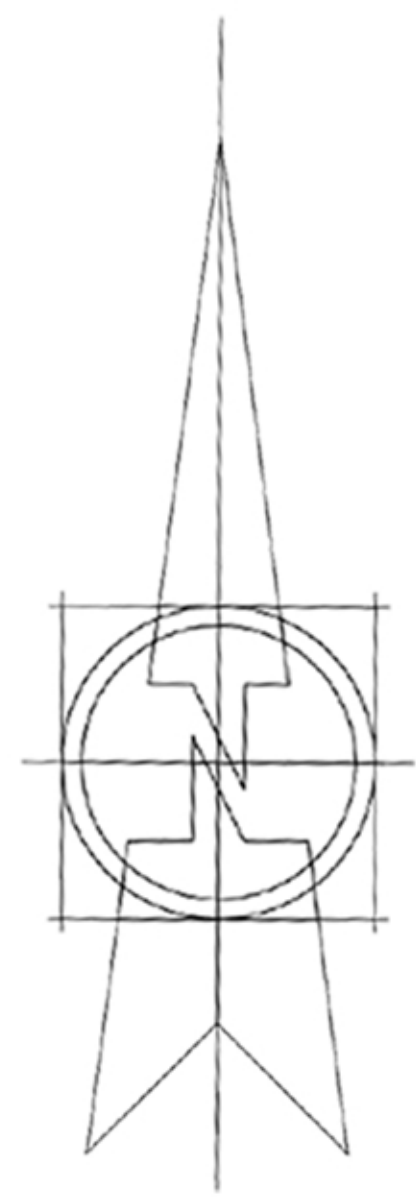

The Contractor is to start and verify all building and site dimensions, and sewer invert levels at connection points before work starts. The Contractor is to comply in all respects with the applicable provisions of the following codes and regulations: the Environmental Protection Regulations, Construction (Design & Management) Regulations, Party Wall Act, etc. and not only or specifically stated on this drawing. This drawing may be read with and without the drawings of the other trades. The Contractor is to be responsible for the drawing. This drawing is not intended to show details of foundations, ground conditions or ground levels. The Contractor is to be responsible for the design of the foundations and for the (including drainage) must be investigated by the Contractor. A suitable method of investigation must be provided allowing for existing ground conditions. Any suspect or fault ground conditions must be investigated and must be further investigated by a suitable expert. Any earthwork constructions should indicate typical slopes for guidance only. Where existing areas are to be retained they should be subject to a full geotechnical investigation and design by a suitable expert. The Contractor is to be responsible for the design of the foundations and for the (including drainage) must be investigated by the Contractor. A suitable method of investigation must be provided allowing for existing ground conditions. Any suspect or fault ground conditions must be investigated and must be further investigated by a suitable expert. Any earthwork constructions should indicate typical slopes for guidance only. Where existing areas are to be retained they should be subject to a full geotechnical investigation and design by a suitable expert. The Contractor is to be responsible for the design of the foundations and for the (including drainage) must be investigated by the Contractor. A suitable method of investigation must be provided allowing for existing ground conditions. Any suspect or fault ground conditions must be investigated and must be further investigated by a suitable expert. Any earthwork constructions should indicate typical slopes for guidance only.