

Vortex Pro Internal Combi Range

Grant Vortex Pro Combi boilers have been designed to increase hot water performance effectively and efficiently due to their large heat exchangers and accurate electronic temperature controls. Each Pro Combi internal model can operate in condensing mode for central heating while also maintaining instant hot water production. Reliable in operation and easy to install and service, the Vortex Pro Combi boilers are a popular choice for homeowners and their installers.

Models

VTXCOMB121 Vortex Internal Combi 21kW
VTXSCOMB126 Vortex Internal Combi 26kW
VTXCOMB136 Vortex Internal Combi 36kW

- 21kW, 26kW and 36kW outputs available
- Slimline 515mm wide 26kW model available
- 24 litre expansion vessel supplied as standard



year guarantee*




space heating efficiency
up to 94.5%
actual

Boiler on/off switch
Optional timer
kit position
Heating and hot water selector switches

24 litre expansion vessel (supplied externally with Combi XS models)
Internal condensate trap (with external option)
Riello RDB burner with plug & socket connection

*When installed by a G1 installer.
Subject to full T&C's.

Model shown: VTXCOMB126

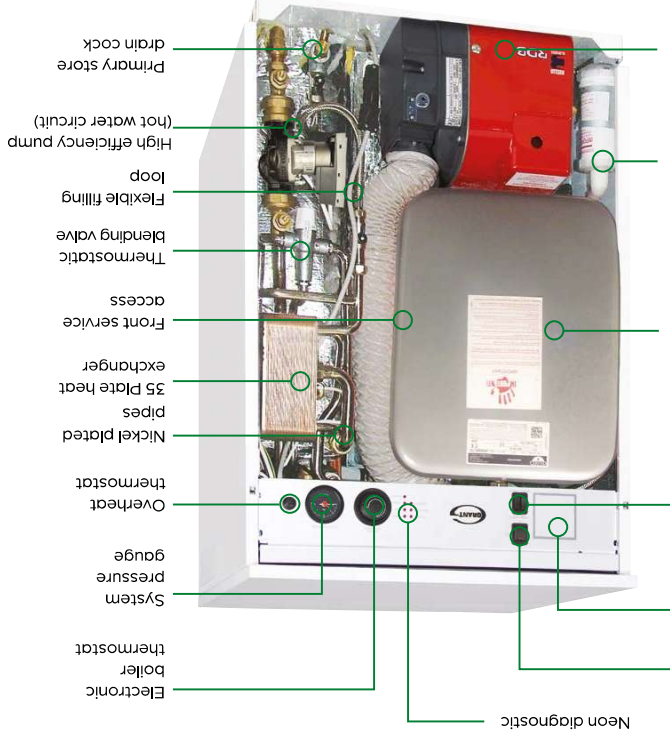

Vortex Pro External Combi Range

The Vortex Pro External Combi boiler range comprises of three models. Each external combination boiler from Grant is supplied with a 24ltr expansion vessel to allow for easy operation. The Pro External Combi, which have larger than normal heat exchangers, deliver excellent hot water performances and are highly efficient.

Models

VTXOMCOMB121Vortex External Combi 21kW
VTXOMCOMB126 Vortex External Combi 26kW
VTXOMCOMB136 Vortex External Combi 36kW

- 21kW, 26kW and 36kW outputs available
- High quality external powder coated paint finish
- Features two accurate electronic temperature controls allowing for condensing mode operation for central heating while also maintaining instant hot water production



year guarantee*




space heating efficiency
up to 94.5%
actual

Boiler on/off switch
Electrical isolation plug
Service switch

24 litre expansion vessel
Riello RDB burner with plug & socket connection

*When installed by a G1 installer.
Subject to full T&C's.

Model shown: VTXOMCOMB126

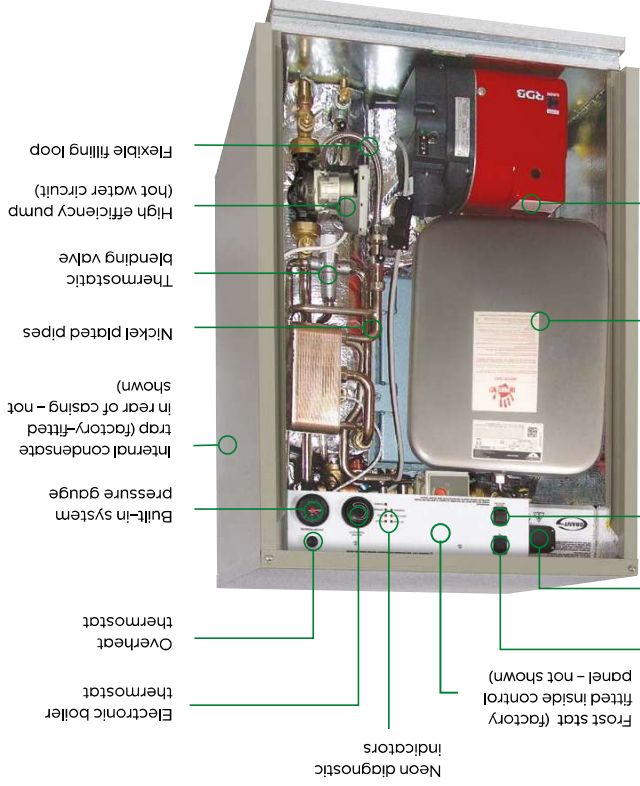





VORTEX PRO EXTERNAL RANGE

TECHNICAL SPECIFICATIONS


Model	kW	Btu/h	kW	mm	mm	mm	mm	mm	kg
VTXOM15/26	15 - 26	50 - 90,000	21	22	22	15	15	143	
VTXOM26/46	26 - 46	90 - 157,000	41	28	28	15	15	162	
VTXOM46/70	46 - 70	157 - 240,000	64	11/4" BSP	11/4" BSP	N/A	N/A	288	

Dimensions (mm)

Vortex Pro External
15-26kW & 26-46kW



Vortex Pro
External 46-70kW







Dimensions (mm)



Vortex Pro Combi XS 26kW

Vortex Pro Combi
21kW, 26kW, 36kW

A+	860	21kW
A+	900	36kW



Vortex Pro Combi
External
21kW, 26kW, 36kW



A+	828	21kW
A+	836	36kW

VORTX PRO COMBI RANGE

TECHNICAL SPECIFICATIONS

Model	kW	Btu/h	kW	mm	mm	mm	mm	mm	mm	kg	L/min	min
VTXCOMBI21	21	70,000	21	22	22	15	15	160	12	4		
VTXXSCOMBI26	26	90,000	26	22	22	15	15	163	15	4		
VTXCOMBI26	26	90,000	26	22	22	15	15	177	15	4		
VTXCOMBI36	36	123,000	36	28	28	15	15	200	20	3		
VTXCOMBI21	21	70,000	21	22	22	15	15	181	12	4		
VTXOMCOMBI26	26	90,000	26	22	22	15	15	206	15	4		

*Hot water flow rate is dependent on mains pressure available. Figures are based upon an incoming mains water temperature of 10°C ** Based upon 100 litre draw off.