


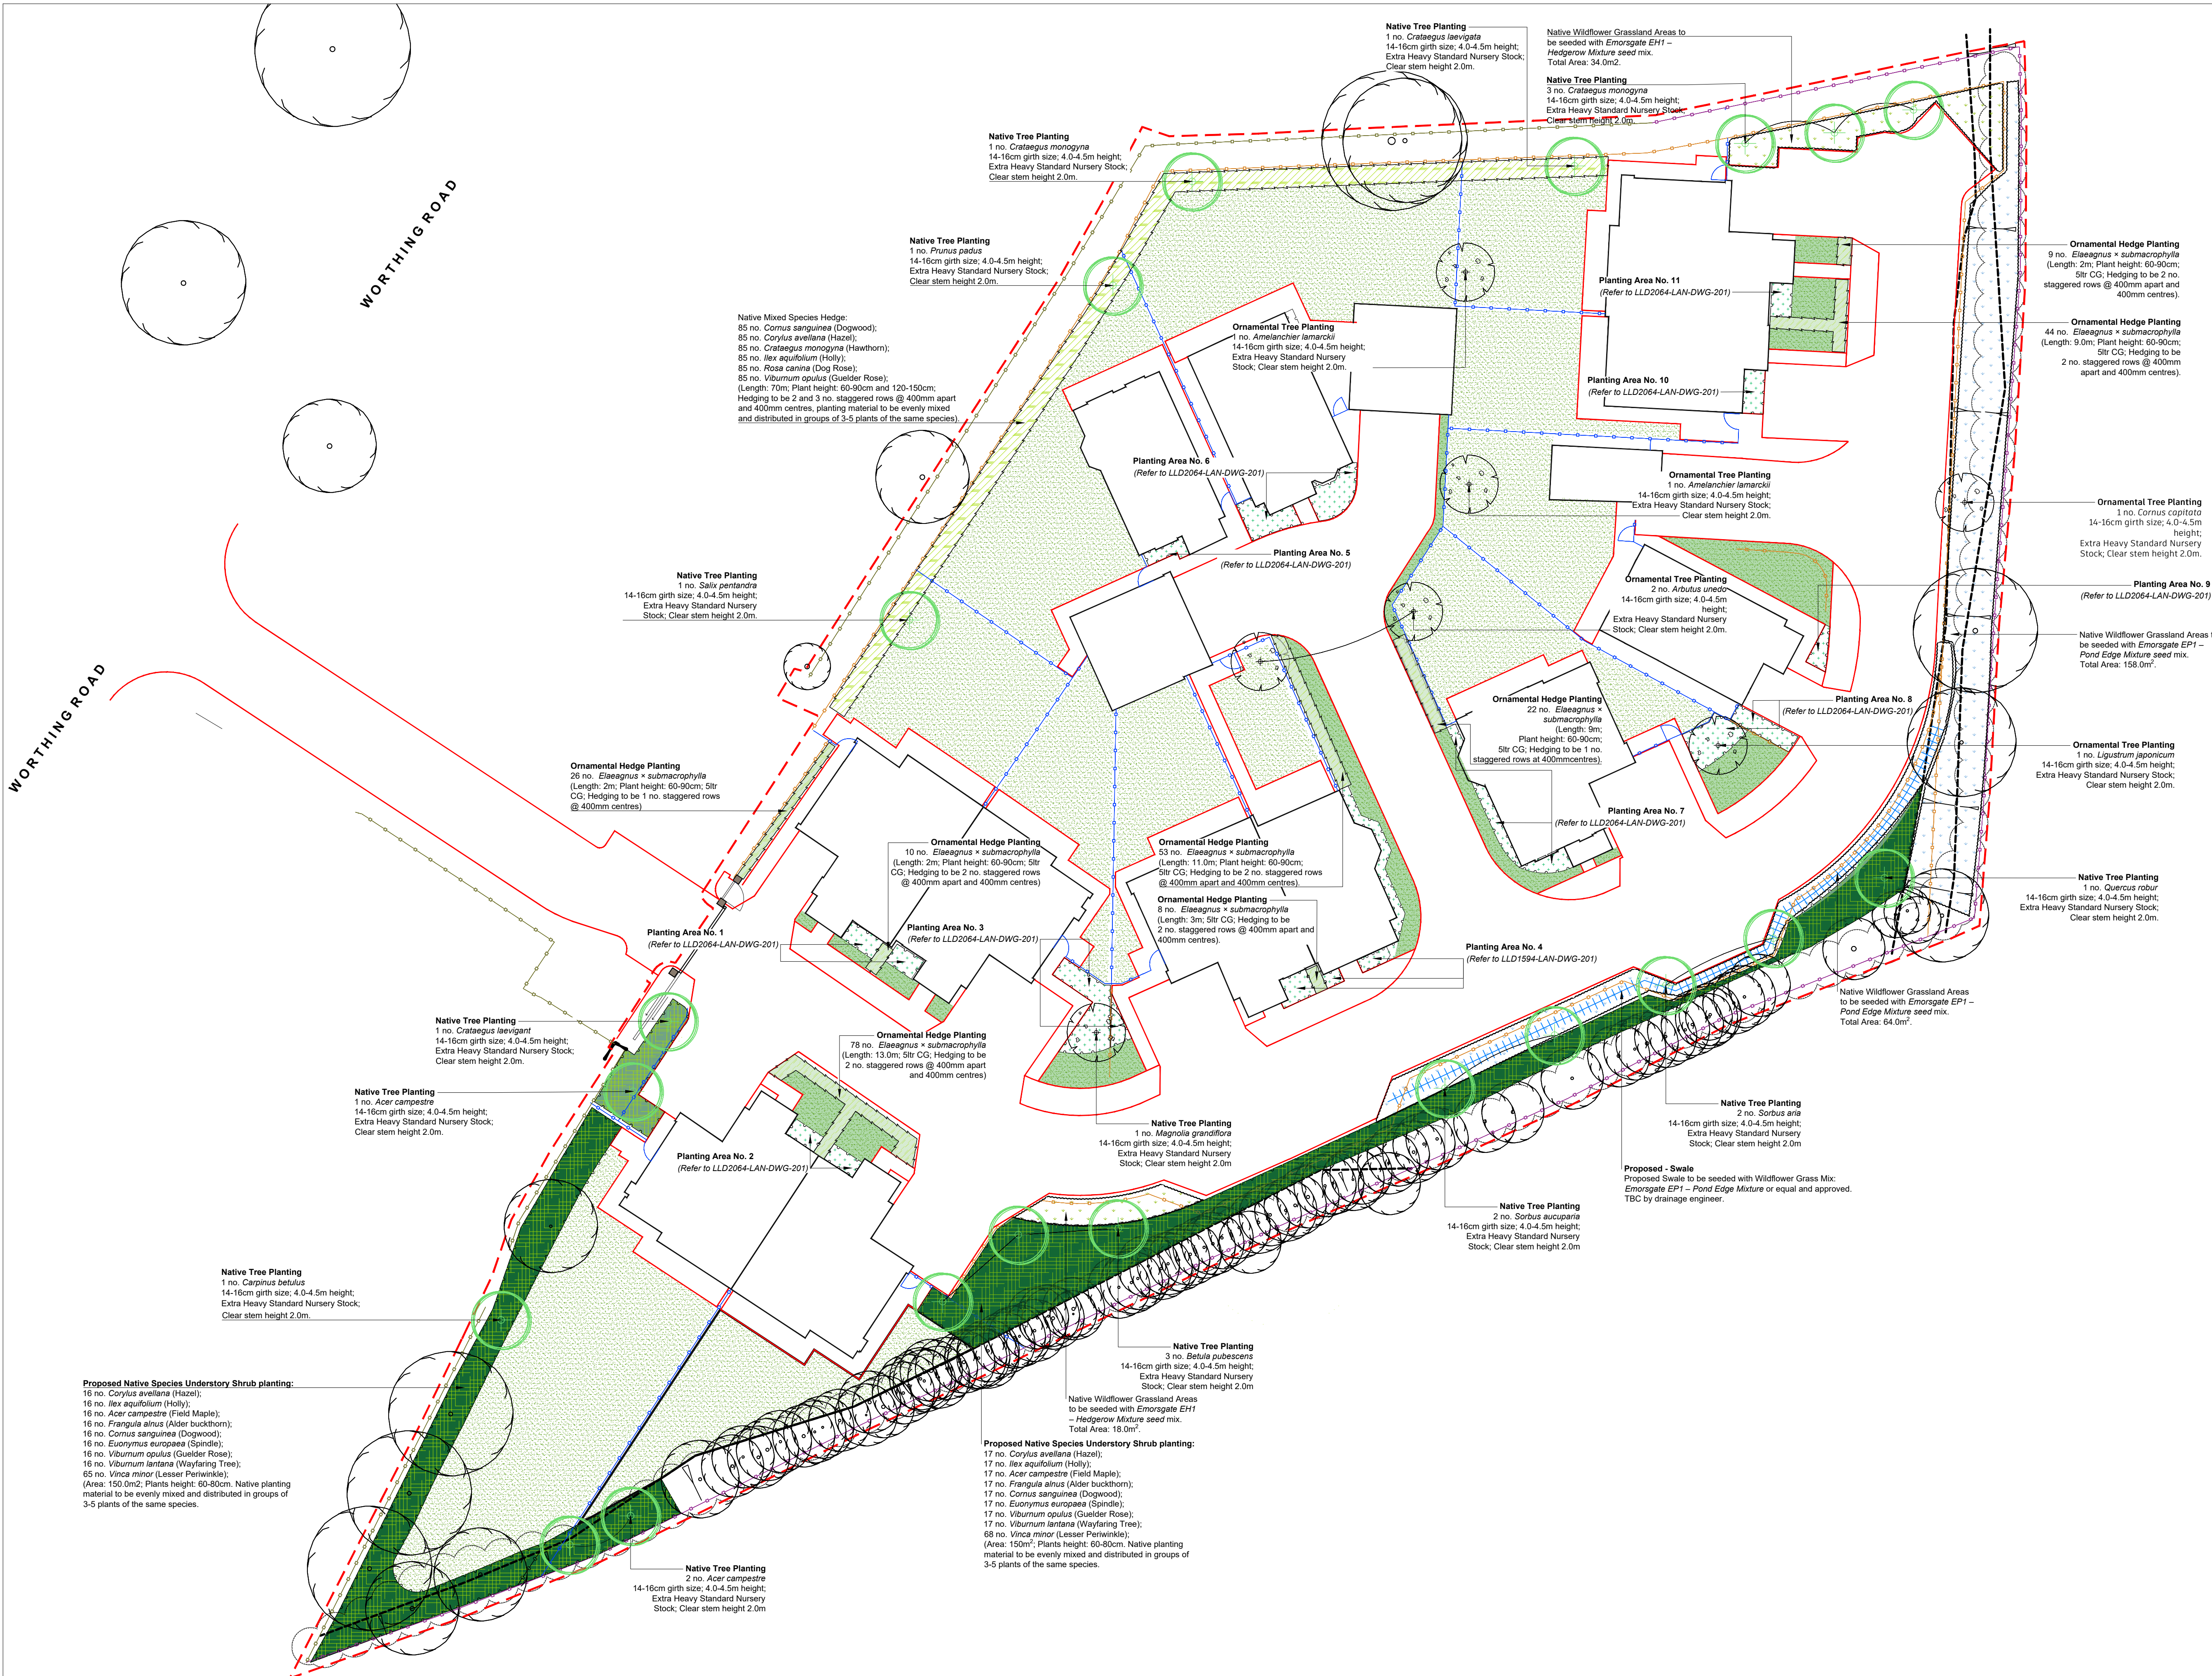

Legend

- Site Boundary
- Existing - Trees with RPAs
- Proposed - Native Tree Planting (Extra Heavy Standard)
- Proposed - Ornamental Tree Planting (Extra Heavy Standard)
- Proposed - Native Mixed Species Hedge Planting
- Proposed - Ornamental Single Species Hedge Planting
- Proposed - Native Understorey Shrub Planting
- Proposed - Shrub Planting Area
- Proposed - Native Wildflower Grassland Areas
- Proposed - Native Wildflower Grassland Areas
- Proposed - Flowering Grassland Areas
- Proposed - Amenity Grassland Areas
- Proposed - Swale

Notes:

Proposed Planting Areas - Topsoil

Tree Planting

Minimum 600mm depth subsoil overlain with a minimum of 300mm depth of topsoil.

Feature Planting / Hedge Planting / Native Understorey Shrub Planting

Minimum 300mm depth subsoil overlain with 300mm depth of topsoil.

Proposed Native Meadow / Wildflower Grassland

Minimum 300mm depth subsoil overlain with a minimum of 150mm depth of topsoil (Low fertility). Wildflower areas are not to be subject to any soil additives, amendments or conditioners. (Imported topsoils to be tested in accordance with BS 3882: 2015 (Low fertility) and certified by a Soil Scientist).

Proposed Amenity Turfed Grassland Areas

Minimum 300mm depth subsoil overlain with a minimum of 150mm depth of topsoil.

Planting Areas / Mulching

All proposed feature planting areas to be overlain with 75mm depth Ornamental Bark Mulch. Planting areas to be mulched with fine graded ornamental bark mulch; 5-35mm nominal particle size. BS4970:1987.

Tree Pit Tree Planting

Tree planting to be in accordance with BS 8545:2014 Trees: from nursery to independence in the landscape - Recommendations.

Tree Pits (Soft Landscape)

- Tree Pit Sizes:
- Planting at excavation: 150mm-300mm greater than rootball size.
- Backfilling:
- Backfill to be gently compacted in layers of 150mm-230mm depth ensuring tree remains upright throughout planting.

Staking

Long Double Staking for:

- 14-16cm girth size: 4.0-4.5m height; Extra Heavy Standard.

2 no. 2400x75mm diameter timber stakes driven vertically at least 300mm into bottom of pit on either side of tree position before planting. The stakes should be placed to allow the fixing of the cross bar to the windward side of the tree. Backfilling should seek to consolidate material around stakes. The stake shall extend above ground level to a maximum 600mm.

The crossbar shall be no more than 40mm away from the stems of the planted tree and the tree secured firmly but not rigidly to the cross bar with one adjustable tie plus spacer with a 25mm long galvanised steel nail, driven vertically into the ground to finish minimum 300mm below base of pit, 2 no. per tree. Stakes to be cut level at 600mm height and braced to windward side of tree with timber crossbar.

All staked trees:

- Ties: Adjustable ties.
- Tying: Secure tree firmly but not rigidly with a single tie centrally on brace for long double staking.

For detailed soft landscape proposals refer to:

- LLD2064-LAN-DWG-200 series - Detailed Planting Plans: 1 & 2.
- LLD2064-LAN-SCH-001 - Detailed Planting Schedule & Specifications.
- LLD2064-LAN-SPE-001 - NBS Landscape Specifications.

PLANNING ISSUE

Rev	Description	Date	Initials
02	Planning Issue	03.07.25	LF
01	Planning Issue	13.10.20	TT
00	Planning Issue	04.09.20	TT

LIZARD
Landscape Design and Ecology

The Old Bank, 34 South Street, Tarring, Worthing, West Sussex, BN14 7LH
T.01903 216033 E. lizardlandscape@btconnect.com W. lizardlandscape.co.uk

Client
WS Planning & Architecture

Project Title and Location
Blakers Yard
Dial Post, Horsham, West Sussex

Drawing Title
Detailed Planting Plan

1 of 2

Scale	Drawn	Approved	Date
1:200@A1	AS	KM	04.09.20

Drawing No	Revision
LLD2064-LAN-DWG-200	02