


3600

VIEWPORT 1A 1:1000@A3
EXISTING SITE PLAN
TREE REMOVALS.

PROTECTIVE FENCING
SPEC. #1

To comprise of 2m tall welded mesh panels on rubber or concrete feet. Panels are to be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence. The panels should be supported on the inner side by stabiliser struts, which should be attached to a base plate and secured with ground pins.

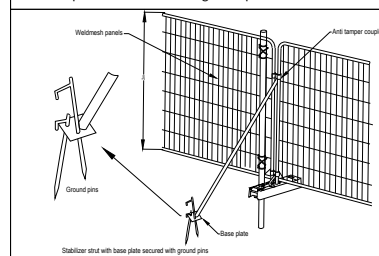

PROTECTIVE FENCING
SPEC. #2

Subject to agreement with the LPA tree officer, protection of the trees more remote from the proposals will comprise plastic mesh temporary barrier fencing, supported on steel road pins or similar, driven into the ground at 1.5-2m centres. The locations where plastic mesh fencing may be used are denoted by continuous bold orange lines on the TPP.

If the LPA tree officer deems the mesh fencing as insufficient protection, the trees will be protected with heras panels as detailed above.



VIEWPORT 3 1:500@A3

WESTERN ELEMENT OF SITE

PROPOSED SITE PLAN
INDICATING TREE
PROTECTION MEASURES