

Installation Instruction


IP65
IK08
LiFePO4 12.8VDC


IMPORTANT

63/672/01 REV E


- THIS PRODUCT IS DESIGNED TO OPERATE OUTDOORS
- DO NOT STARE AT THE OPERATING LIGHT SOURCE.
- PERSONNEL TO WEAR PROTECTIVE SAFETY GLASSES COMPLIANT WITH EN166 1F/EN169-5 WHEN COMMISSIONING OR MAINTAINING THIS PRODUCT.
- LEDS CONTAINED WITHIN THIS LUMINAIRE SHALL ONLY BE REPLACED BY THE MANUFACTURER, THEIR SERVICE AGENT OR SIMILAR QUALIFIED PERSON.
- THE LUMINAIRE SHOULD BE POSITIONED SO THAT PROLONGED STARING INTO THE LUMINAIRE AT A DISTANCE CLOSER THAN 2.7 METERS IS NOT EXPECTED.

PRODUCT DETAILS

SIERRA BOLLARD	
WEIGHT (kg) 	13
A (mm)	1050
B (mm)	□ 280
C (mm)	□ 200
D (mm)	□ 240

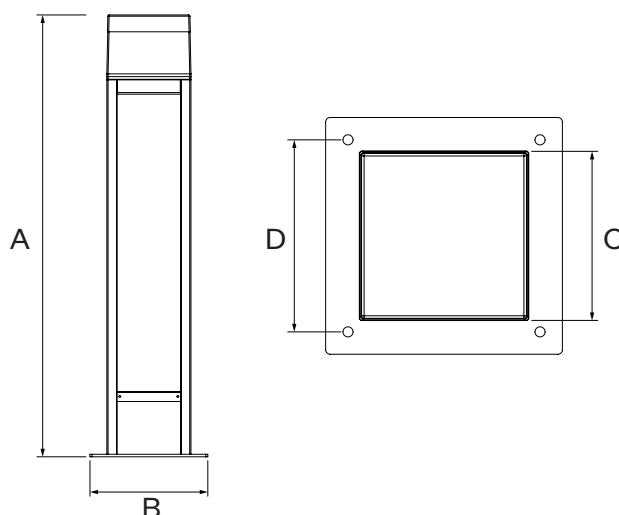


* Bolted root mount for SIERRA BOLLARD can be purchased separately.

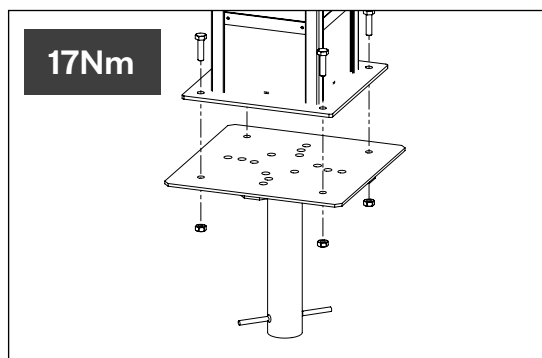




TOOLS REQUIRED

Tools not supplied unless otherwise stated.


- ① TORQUE WRENCH

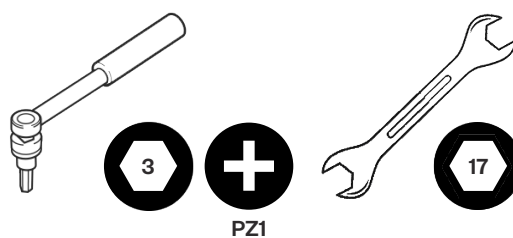

INSTALLATION

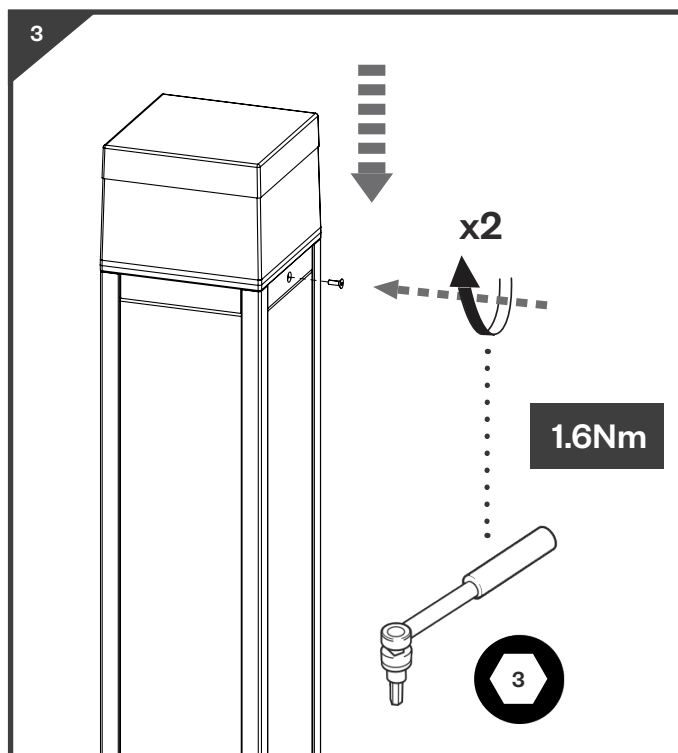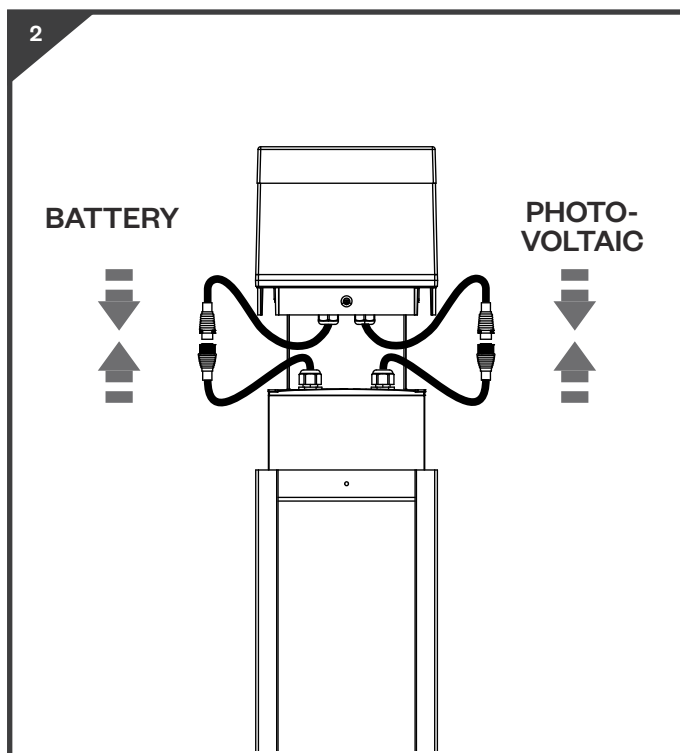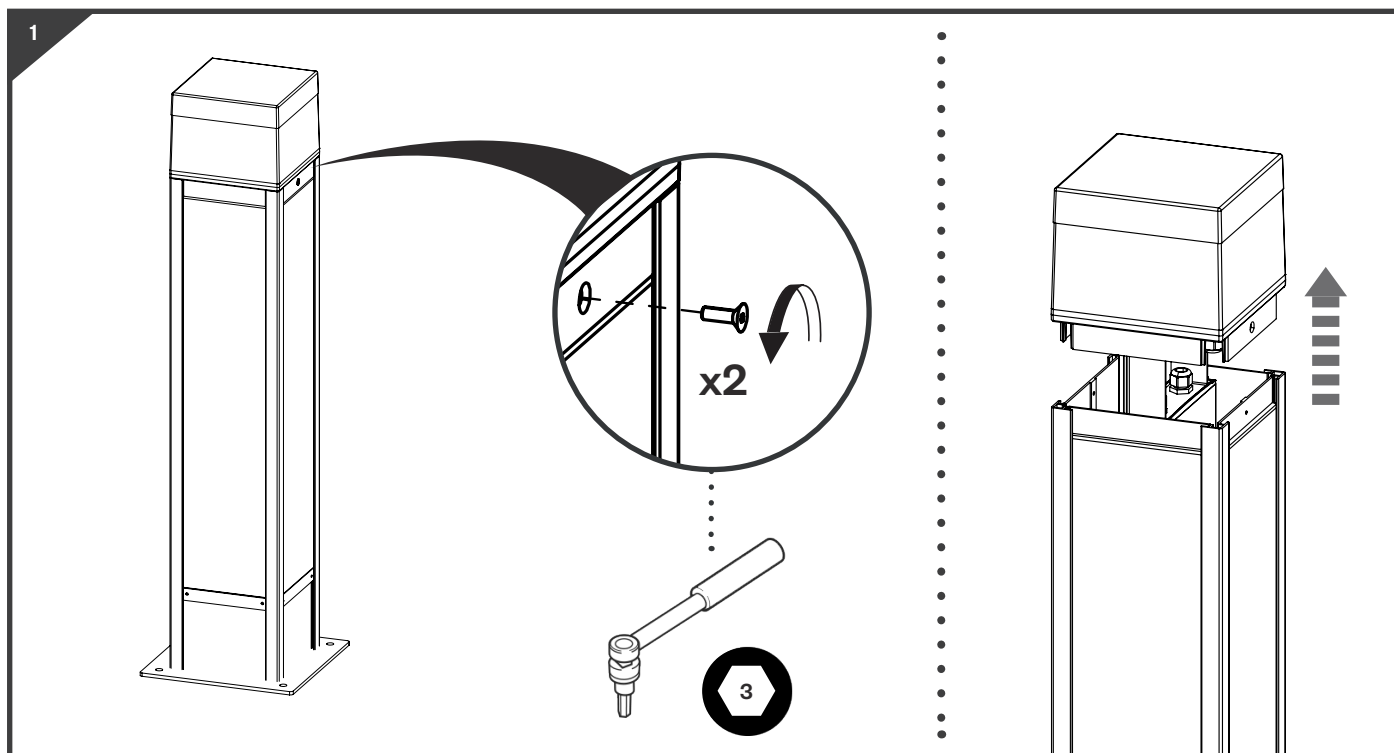


INSTALLATION

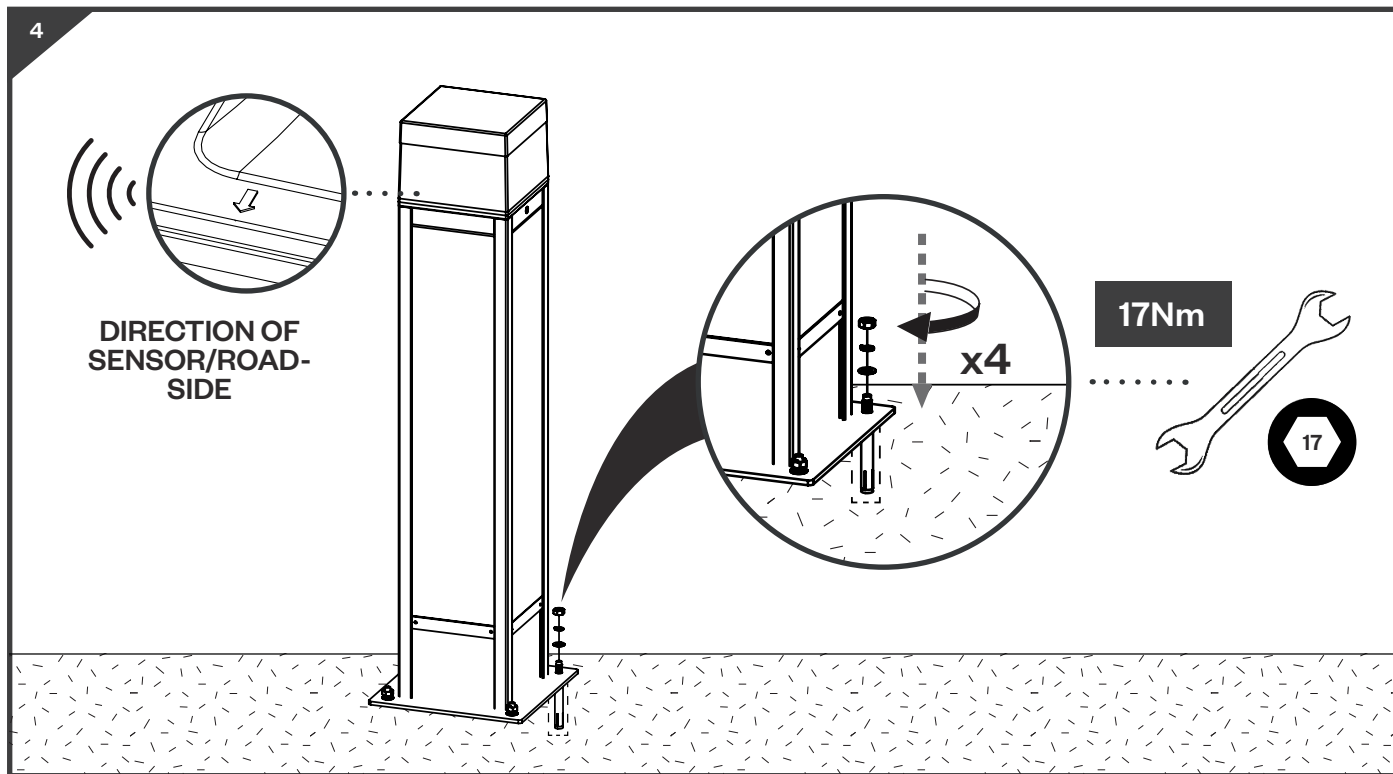

CLEANING

The luminaire is protected against water ingress to IP65.

Sealed design ensures that this rating will be maintained over the full lifetime of the product.

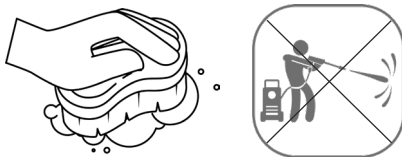

Over time with exposure to the elements, the painted exterior of this luminaire may show signs of weathering such as loss of gloss, chalking and slight colour change.

A simple regular clean will minimise the effects of weathering and will remove dirt, grime and other build-up detrimental to all surface coatings.

Use a solution of warm water and non-abrasive, pH neutral detergent solution. Surfaces should be thoroughly rinsed after cleaning to remove all residues. Cleaning should be carried out by hand using a soft cloth or sponge.

DO NOT use high pressure water jets or high-pressure cleaners.