


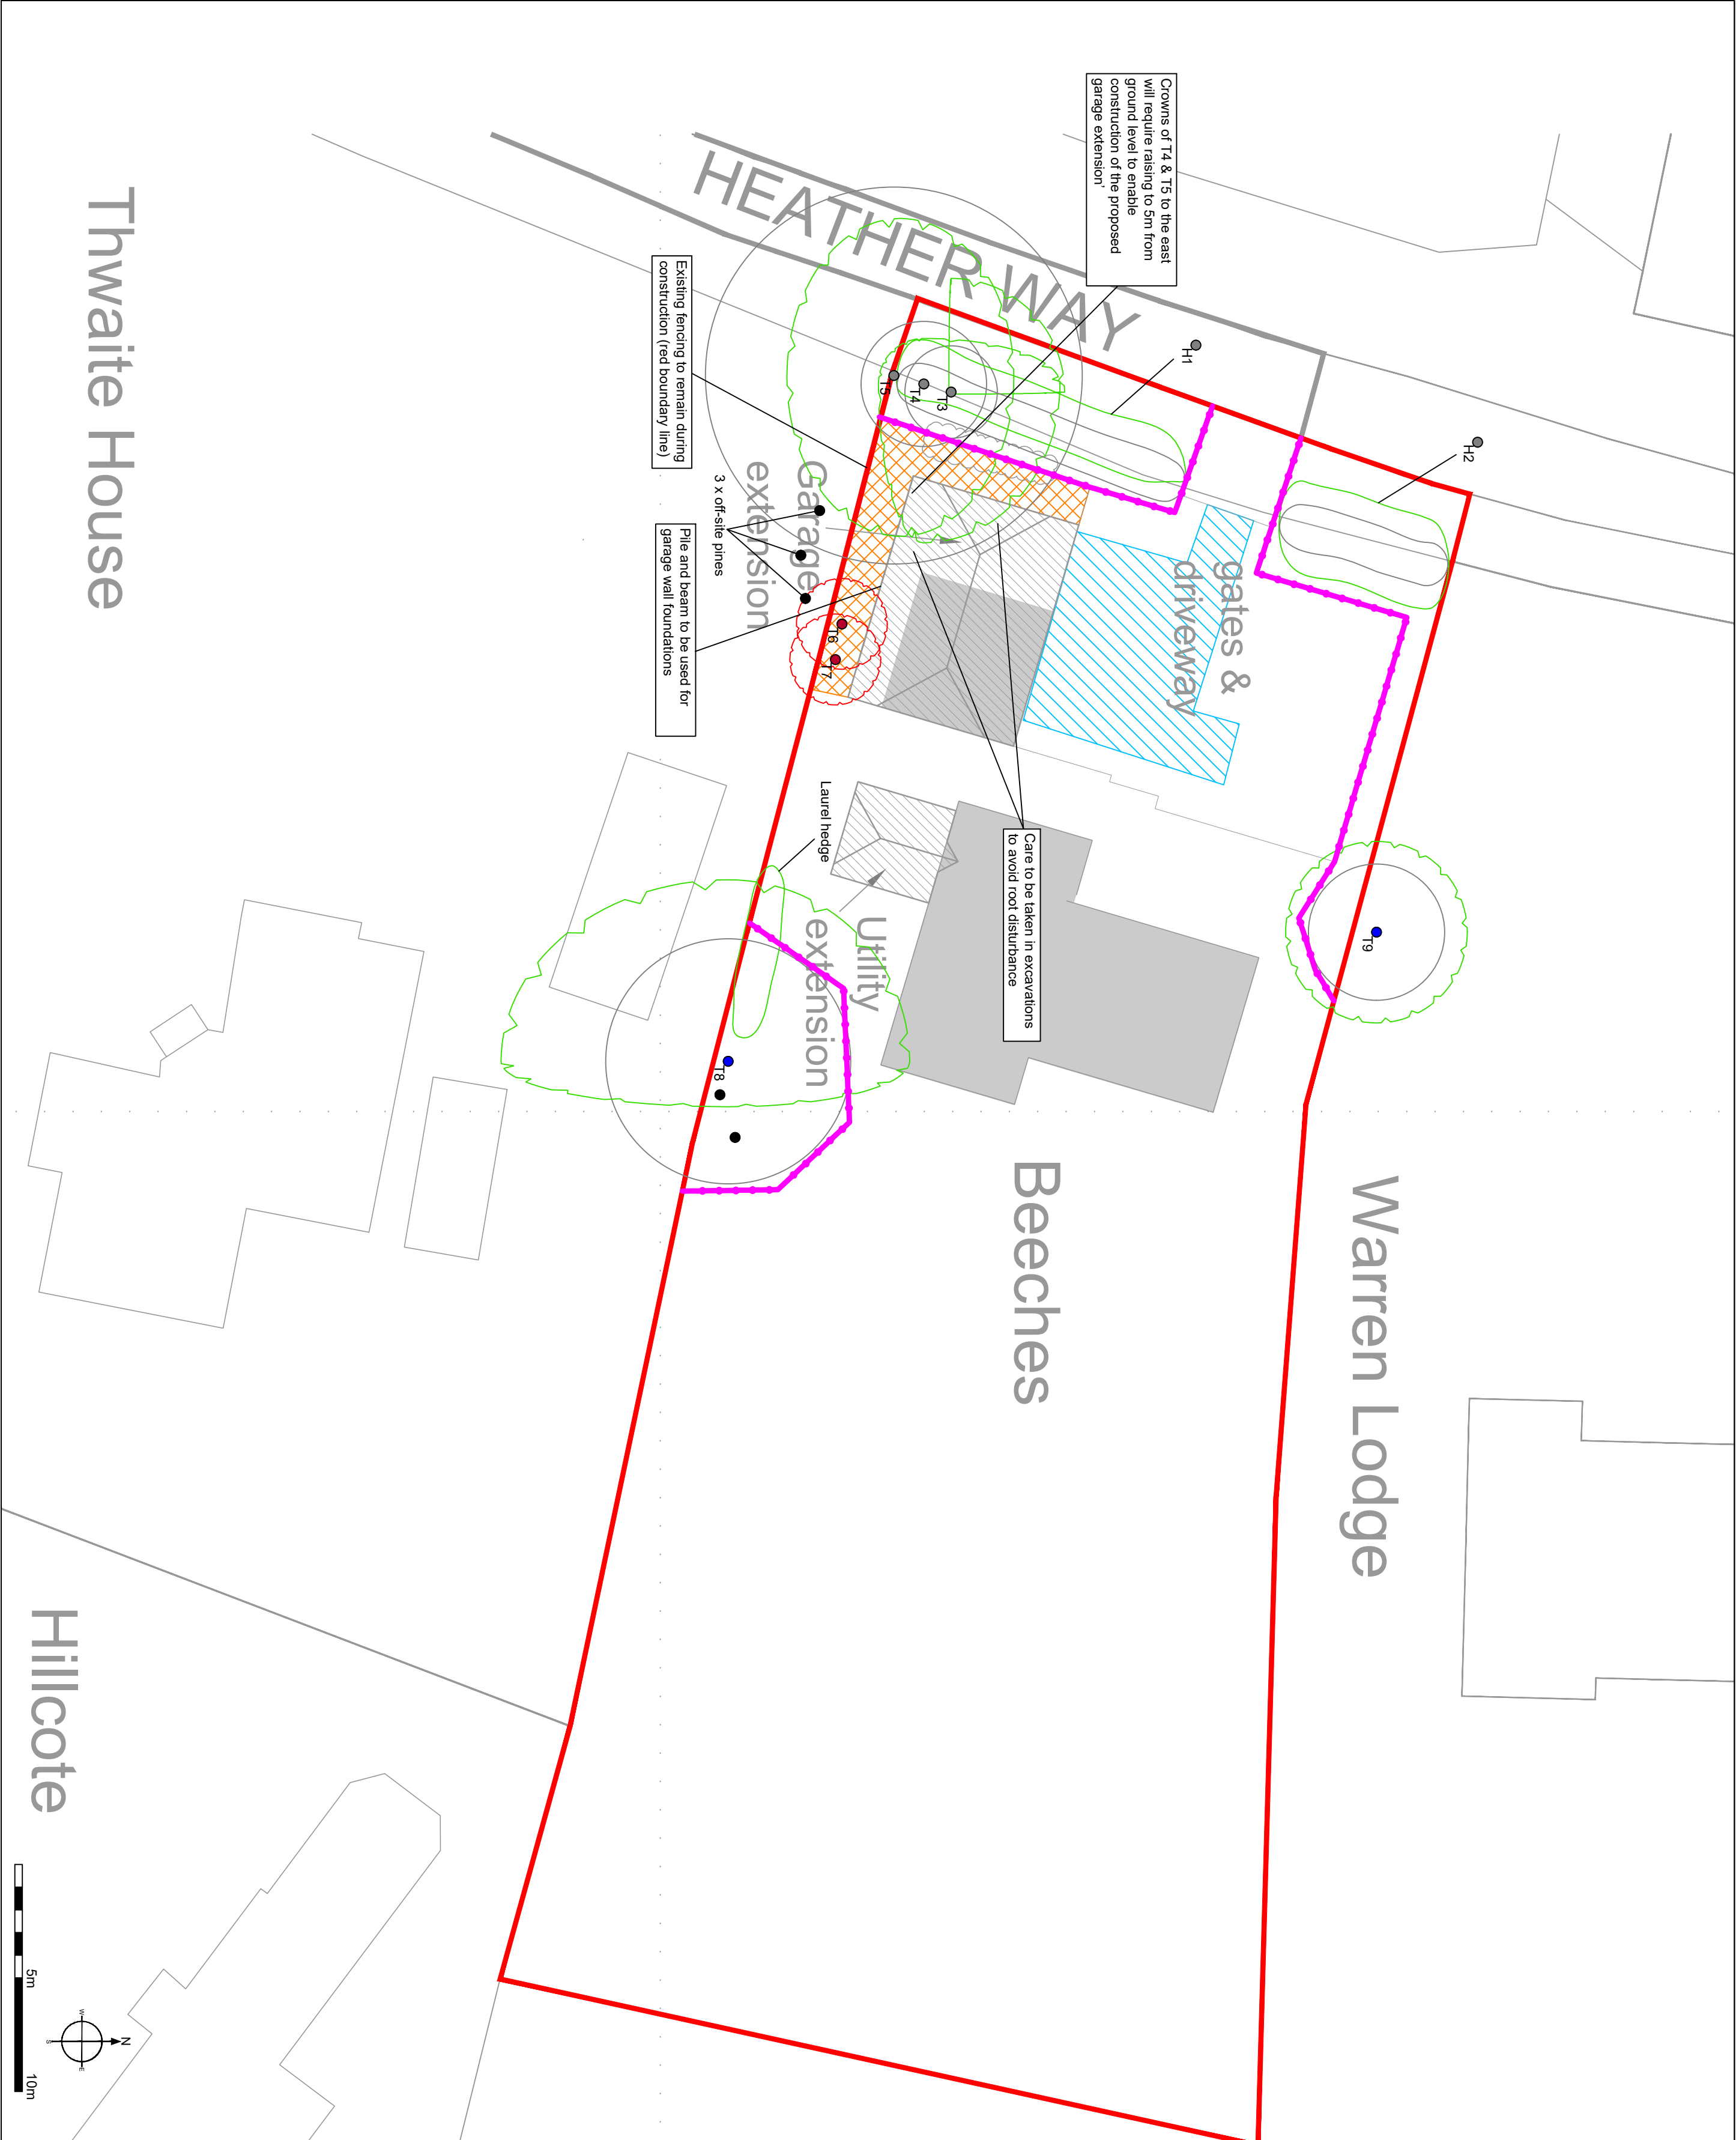

Crowns of T4 & T5 to the east will require raising to 5m from ground level to enable construction of the proposed garage extension

Existing fencing to remain during construction (red boundary line)

Pile and beam to be used for garage wall foundations

3 x off-site pines

Care to be taken in excavations to avoid root disturbance

Laurel hedge



Tel 07759482934
www.absolutearb.com

Site: Beeches, Heather Way, Storrington, West Sussex, RH20 4DD

Drawing Title: Tree Protection Plan

1:200 @ A2

March 2026

Key:

● Category A

● Category B

● Category C

● Category U

Category

Root Protection Area

Crown Spread

Tree Number

 Existing Hard Standing

 Tree Protection Fencing

 Tree Proposed for Removal

 Temporary Ground Protection

NOTE: Treegroup numbers marked have approximate locations.