




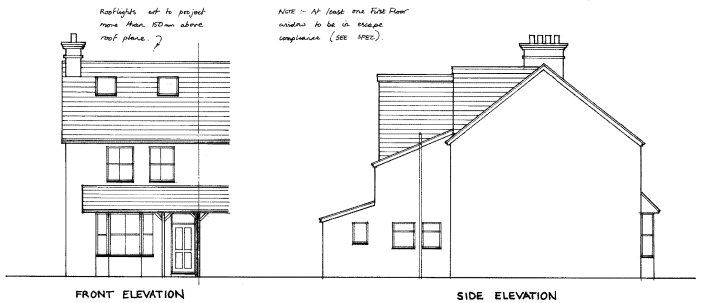


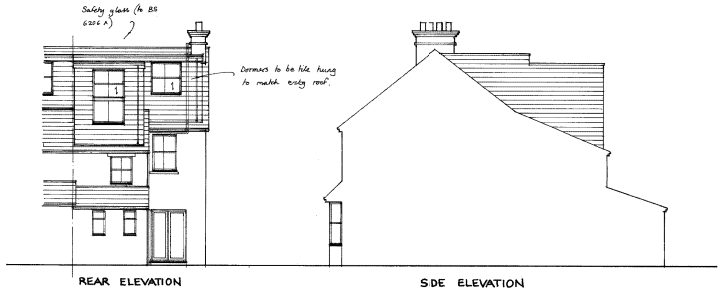







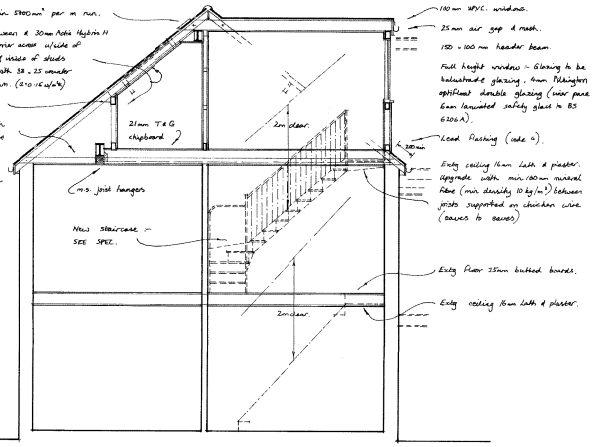

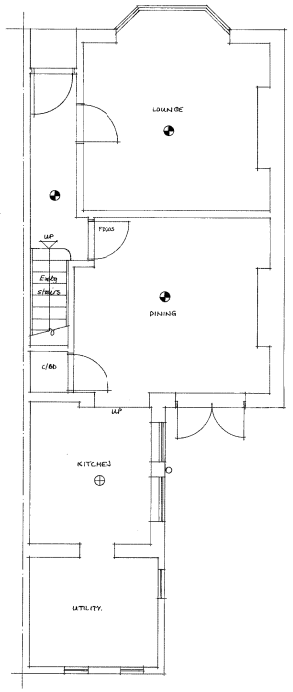

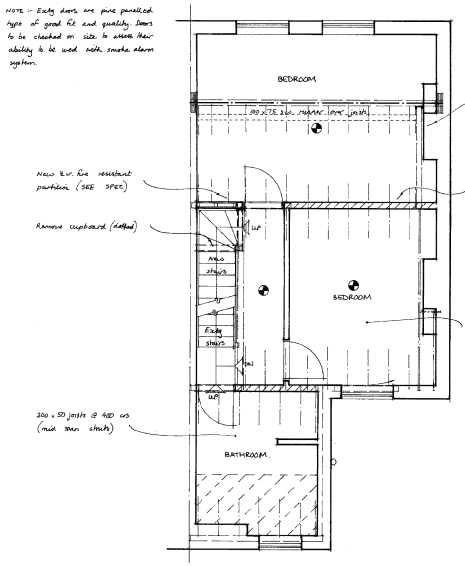

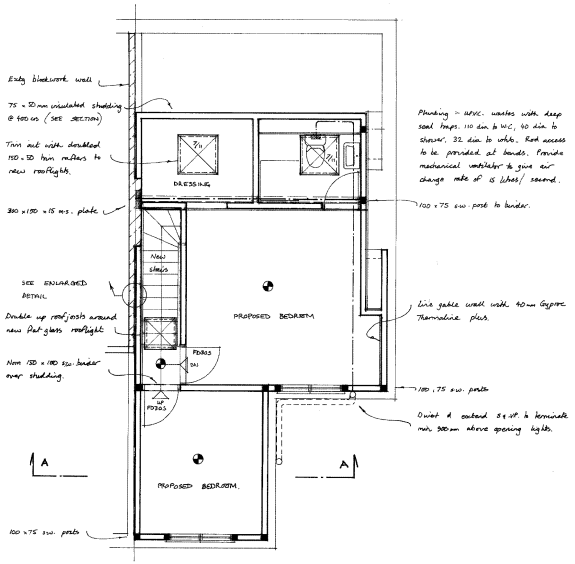

SPECIFICATION

DORMER ROOF CONSTRUCTION (U=0.15W/m2K)
12.5mm chippings on 3 layers bituminous felt on 18mm plywood on 50 x 50 s.w. battens across firrings (1 in 40) on 175 x 50 s.w. joists @ 400mm crs. 80mm Celotex / Kingspan PIR insutation between and 30mm Actis Hybrid insulation / vapour barrier across underside of joists, Fixed with 38x25mm counter battens @ 600 crs with 12.5mm duplex Plasterboard & 5mm plaster skim ceiling.

DORMER CHEEK CONSTRUCTION (U=0.18W/m2K)
(Half hour fire resistant from both sides). Vertical tile/slate hanging to match existing on s.w. battens on building paper on 12.5mm plywood bracing (9mm masterboard within 1m of boundary) on 100x50mm studs @ 400mm crs (cross braced). 80mm Celotex/ Kingspan PIR insulation between studs and 30mm Actis Hybrid insulation/vapour barrier across inside of studs fixed with 38x25mm counter battens @ 600 crs with 12.5mm duplex plasterboard & 5mm skim ceiling.

STAIRCASE
Rise=200mm, Going=225mm, Tread=250mm, Pitch=42°, 2m clear Headroom, 900mm handrail, 900mm balustrade housed into newels or returned to adjacent wall. (100mm max gaps to risers & handrails). Artificial lighting with 2 way switch top and bottom. Any tapered Treads to comply with Part K. 50mm min going.

HALF HOUR PARTITION AROUND NEW STAIRCASE
75x50mm studding with 12.5mm duplex plasterboard & 5mm skim to both sides to give full half hour fire resistance.

FIRE REGULATIONS
~~All doors at ground and first floor off staircase enclosure to be 1/2 hour fire resistant (FD30S).~~ Any glazing to be wired glass (max 0.36m area). Steel beams to be encased in 2 layers of 12.5mm plasterboard (staggered joints) to give full half hour fire resistance. Timber beams have half hour fire resistance to BS5268 part 4 section 41 1078 (sacrificial design method).

WINDOWS & ESCAPE WINDOWS
Escape window to be 750x450mm min clear opening (min 0.33m Opening area) max 1.1m above floor level. All new windows and Rooflights to be double glazed with min 16mm gap, low E glass N=0.15 for windows, n=0.05 for rooflights. Windows to achieve Purge ventilation rate of not less than 1/20th of floor area. Window U-Value to achieve min 1.4W/m2K

STRUCTURAL
Multiple timber trimmers to be bolted together @ 600mm crs using M12 bolts and 54mm dia tooth plate connectors.

VENTILATION
Provide 8000mm background Ventilation to new habitable rooms and 5000mm to new bathroom/En-suites areas. New windows and French doors to achieve a purge ventilation rate of not less than 1/20th of the new floor area.

SMOKE DETECTORS
⊕Denotes heat detector. ◔Denotes mains wired interconnected smoke detectors with battery back up to BS5839:6:2004.

LIGHTING AND HEATING
Three in four lights to be energy efficient type. Extend existing Heating system to new rooms with zone and boiler interlock controls (Thermostatic Valves).

ELECTRICAL
All new electrical work to be in accordance with Part P "Competant Person Scheme" to BS7671. Certification to be provided upon completion.

PROJECT
Formation of habitable rooms in roofspace with Rear dormers and Front rooflights.

CLIENT

Mr. T. Davies,
57, Swandon Road,
Horsham,
West Sussex,
RH12 1HE.

NOTE :- DO NOT SCALE OFF PLANS AS ACTUAL SIZES ON SITE MAY VARY SLIGHTLY

COUNCIL Horsham D.C.

SCALE 1:50 & 1:100 | DATE 6:2:2024

DRAWN B [redacted] | CONTRACT No TLCC 600

THE LOFT CONVERSION COMPANY
TEL :- 01306 886520
www.loftconversioncompany.com