TEMPOSTOP time flow tap

Ref. 745301

(AB) Anti-blocking model



DESCRIPTION

TEMPOSTOP time flow tap - Ref. 745301

Deck-mounted time flow basin tap:
Time flow ~7 seconds.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 to 6 lpm.
Tamperproof scale-resistant flow straightener.
Solid chrome-plated brass body M½".
Fixing reinforced by back-nut with 3 stainless steel screws.
AB anti-blocking system: water will flow only when the push-button is released.
10-year warranty.


ADVANTAGES

- Chrome-plated solid brass, reinforced fixing
- Anti-blocking system
- 85% water savings
- Maintenance from front without removing the tap

TECHNICAL CHARACTERISTICS

TEMPOSTOP time flow tap - Ref. 745301

Connector	M½"
Technology	Time flow
Drop height	35mm
Spout length	110mm
Flow rate	3 lpm
Norms	ACS WRAS
Warranty	



SINGLE LEVER

SLD2/CH - Polished Chrome




GENERAL FEATURES

- Single lever design
- Minimum 0.3 bar pressure required
- Single lever ceramic valve
- Single flow
- WRAS approved

The SLD2/CH has been designed to conform to water efficiency requirements, it has a flow rate of less than 4 litres per minute at 3 bar.


OPTIONAL EXTRAS

- ECO/AERATOR1 Aerator

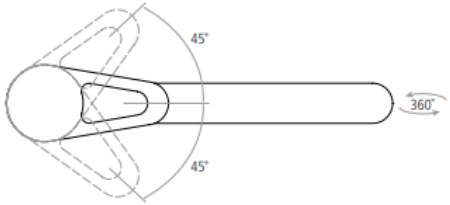

DIMENSIONS

- Worktop cut out 35mm required

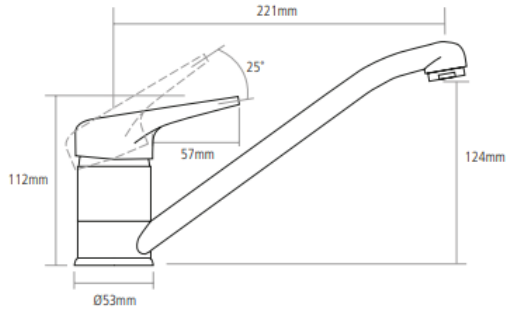

Conceala 2 Cistern Universal Height 4.5/3 or 4/2.6 Litre Valve Side Supply

ILLUSTRATED

S3643 Conceala 2 4.5/3 or 4/2.6 litre cistern, dual flush valve, side supply, internal overflow, alternative height plastic flushbends, no flushplate/button

S4503 Contemporary flush plate dual flush, stainless steel for Conceala 2 cisterns

OPTIONS

S4399 Contemporary flush plate dual flush for Conceala 2 cisterns

ILLUSTRATED PRODUCT DETAILS

Weights

S3643 2.70 KG
S4503 0.36 KG

Materials

S3643 Plastic
S4503 Stainless Steel

Finishes

S3643 Neutral / No Finish (67)

S4503 Stainless Steel finish (MY)

Capacity

S3643 4.0 litres


Standards

Cistern to BS EN 14055

Special Notes

Cistern is supplied with 2 x 800mm lengths of plastic air tubes. Optional 3m lengths can be purchased where remote operation is required. See buttons & flushplates section from 6:2:91 to 6:2:94 for actuation options.



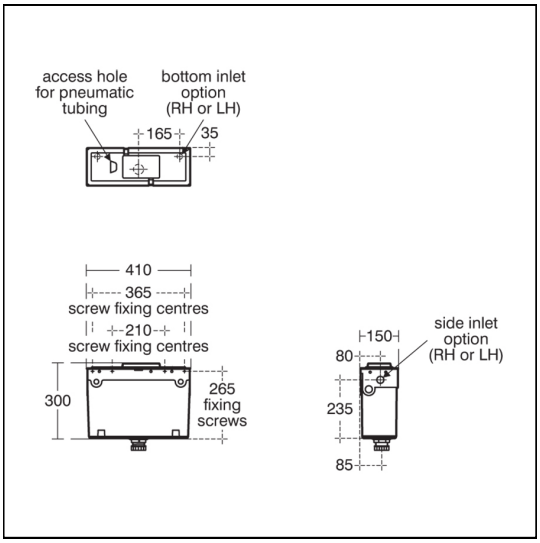

ACCREDITATIONS

S3643(67)

Unified Water Label 3.0 Average Flushing Volume (Litres)

WRAS APPROVED PRODUCT

FEATURES

Ideal Standard (UK) Ltd. makes every effort to ensure that the information provided on its website is accurate. However, we cannot guarantee this, and accept no liability for any information or advice given via its website.

Armitage Shanks

inta



WRAS APPROVED PRODUCT

Product


VR991CP - Vandal Resistant Shower Head (Concealed or Exposed)

Accessories

BO57033 - 6 Litres Per Minute Flow Regulator
BO57034 - 8 Litres Per Minute Flow Regulator
HOPIPE1 - 1m (15mm Ø) Polished Stainless Steel Pipe

Technical Specification

Max Inlet Pressure (static):	*10 Bar*
Min Inlet Pressure (dynamic):	*0.2 Bar*
Max Inlet Temperature:	*85°C*
Inlet Connection:	*15mm Compression*

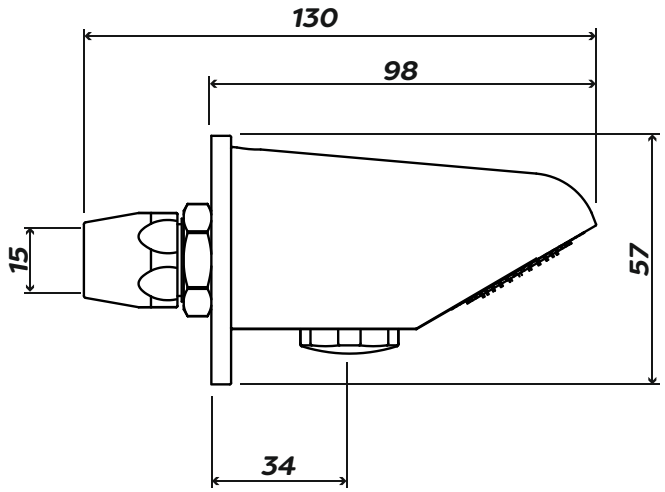

Additional Information

Suitable for concealed or exposed pipework

Vandal resistant design

Brass body with polished chrome finish


1m polished stainless steel pipe available (HOPIPE1)

Hidden wall fixing for security

Flow regulators available

Full range of shower controls to suit

VR991CP Spray Pattern at 1 Bar (dynamic)

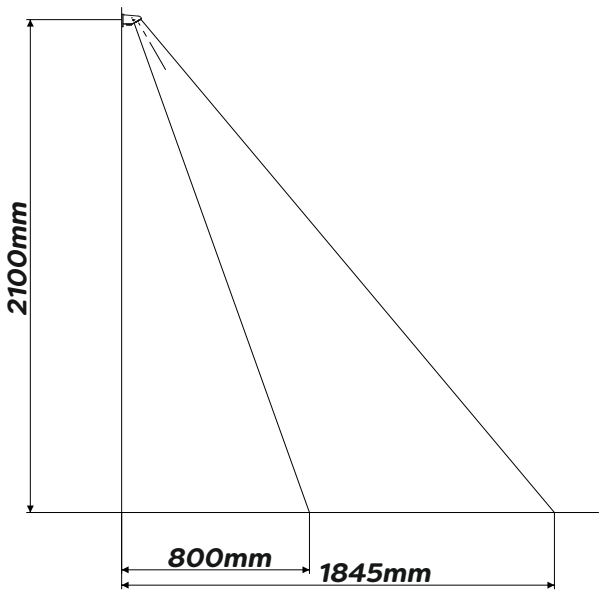

Scan for Spares Sheet

Scan for Installation & Maintenance Instructions

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF
T. 01889 272180 F. 01889 272181 E. sales@intatec.co.uk
www.intatec.co.uk

04/22
E&OE

inta






Product

TF9923CP - Exposed Timed Flow Shower (3 Seconds)
TF992CP - Exposed Timed Flow Shower (15 Seconds)
TF99230CP - Exposed Timed Flow Shower (30 Seconds)
TF9973CP - Concealed Timed Flow Shower (3 Seconds)
TF997CP - Concealed Timed Flow Shower (15 Seconds)
TF99730CP - Concealed Timed Flow Shower (30 Seconds)


Technical Specification

Max Inlet Pressure (static):	*10 Bar*
Min Inlet Pressure (dynamic):	*0.2 Bar*
Max Inlet Temperature:	*65°C*
Flow Tolerances:	*3 ± 1 Seconds at 1 Bar* *15 ± 3 Seconds at 1 Bar* *30 +5/-10 Seconds at 1 Bar*

Exposed

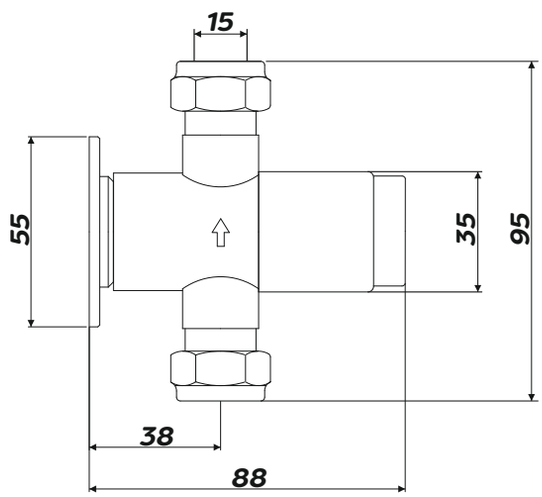

Concealed

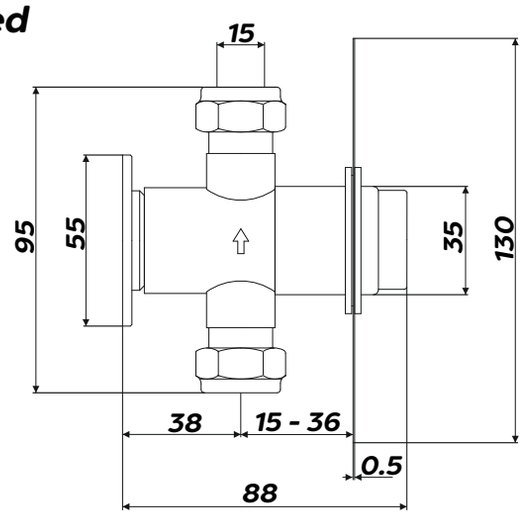

Additional Information

Simple non-concussive push button operation

Automatically shuts of the flow of water after a set time, reducing water waste

Exposed or concealed options available

Wide range of vandal resistant shower heads and spouts to suit

Sturdy vandal resistant design makes it ideal for high use public & commercial applications

Designed to be used with a thermostatic mixing valve, such as our range of Intamix TMV's

Flow Rates (Open Outlet)

Pressure (Bar)	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0
Flow Rate (L/m)	7	9	12	13.5	15	16.5	18	19.5	21.5	23

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF
T. 01889 272180 F. 01889 272181 E. sales@intatec.co.uk
www.intatec.co.uk

02/23
E&OE

Series 4, Fully-integrated dishwasher, 60 cm SMV4HTX27G







Optional accessories

SGZ0BI02	decorative strips stainless steel 81,5cm
SGZ0IC00	Small Item Clip for upper rack
SGZ1010	inlet and outlet hose extention
SGZ8BI00	Connection rail for divided furniture
SMZ2014	Rack insert for stemware dishwasher
SMZ2056	Attachment door, stainless steel
SMZ5003	Retractable hinge f. high corpus dimens.
SMZ5300	GlassSecure Tray

Flexible loading and smart remote control of your dishwasher via the Home Connect app.

- **Home Connect**: home appliances with smart connectivity for an easier everyday life.
- **ExtraDry**: extra drying option for difficult-to-dry loads.
- **InfoLight**: a red light on the floor indicates whether the dishwasher is switched on or off.
- **Silence on demand**: up to 30 min noise reduction at any time via the Home Connect App.
- **Vario Flex baskets**: easily adjustable to create more space for your dishes.

Technical Data

Energy Efficiency Class: ..... E
Energy Consumption for 100 cycles Eco Programme: ..... 92 kWh
Maximum number of place settings: 12
The water consumption of the eco programme in liters per cycle: 9.5 l
Programme duration: ..... 3:45 h
Airborne acoustical noise emissions : .....48 dB(A) re 1 pW
Airborne acoustical noise emission class: C
Built-in / Free-standing: ..... Built-in
Height of removable worktop: .....0 mm
Dimensions of the product (HxWxD): .....815 x 598 x 550 mm
Min. required niche size for installation (HxWxD): ....815-875 x 600 x 550 mm
Depth with open door 90 degree: ..... 1150 mm
Adjustable feet: ..... Yes - all from front
Maximum adjustability feet: ..... 60 mm
Adjustable plinth: ..... Both horizontal and vertical
Net weight: .....33.3 kg
Gross weight: ..... 35.4 kg
Connection rating: ..... 2400 W
Fuse protection: .....10 A
Voltage: ..... 220-240 V
Frequency: ..... 50; 60 Hz
Length electrical supply cord: ..... 175.0 cm
Plug type: .....GB plug
Length inlet hose: ..... 165 cm
Length outlet hose: ..... 190 cm
EAN code: 4242005304653
Installation typology: ..... Integrated

4 242005 304653

Series 4, Fully-integrated dishwasher, 60 cm
SMV4HTX27G

Flexible loading and smart remote control of your dishwasher via the Home Connect app.

Performance

- Energy Efficiency Class[1]: E
- Energy[2] / Water[3]: 92 kWh / 9.5 litres
- Capacity: 12 place settings
- Programme duration[4]: 3:45 (h:min)
- Noise level: 48 dB(A) re 1 pW
- Noise Efficiency Class: C

Programmes / functions

- 6 programmes: Eco 50 °C, Auto 45-65 °C , Intensive 70 °C, Express 65°, Glass 40 °C, Favourite
- Default favourite programme: Pre-Rinse
- 4 special options: Remote Start, Extra Dry, Hygiene+, SpeedPerfect+
- Machine Care
- Silence on Demand (via app)

Flexible design elements

- Vario Flex baskets
- 3 stage Rackmatic height-adjustable top basket
- Low friction wheels on bottom basket
- Rack Stopper to prevent derailing of bottom basket
- 2 foldable plate racks in top basket
- 4 foldable plate racks in bottom basket
- Moveable cutlery basket in lower rack
- Upper rack cup shelf

Innovations and technology

- Home Connect ready on WLAN
- Heat exchanger.
- DosageAssist detergent dispenser
- EcoSilence BLDC drive
- Automatic detergent detection
- AquaSensor III
- AquaMix - Glass protection system

Design features

- Push button top edge controls
- InfoLight (Red) - Light projection on the floor
- Time delay (3, 6 or 24 hours)
- Acoustic end of cycle indicator, Time remaining indicator (min), water inlet indicator
- AquaStop: Bosch's warranty in case of water damage - for the lifetime of the appliance. Please find warranty terms under https://www.bosch-home.co.uk/customer-service/care-protection-and-parts/additional-warranties
- Self-cleaning filter system with 3 piece corrugated filter
- Large item spray head, steam protection plate
- Stainless steel/Polinox interior
- Dimensions (HxWxD): 81.5 x 59.8 x 55cm

[1] Scale of Energy Efficiency Classes from A to G


[2] Energy consumption in kWh per 100 cycles (in programme Eco 50 °C)

[3] Water consumption in litres per cycle (in programme Eco 50 °C)


[4] Duration of programme Eco 50 °C

Series 4, Fully-integrated dishwasher, 60 cm
SMV4HTX27G

measurements in mm

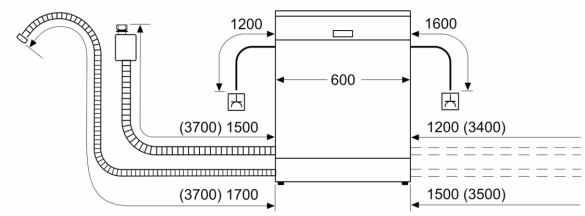

socket
( ) values with extension kit

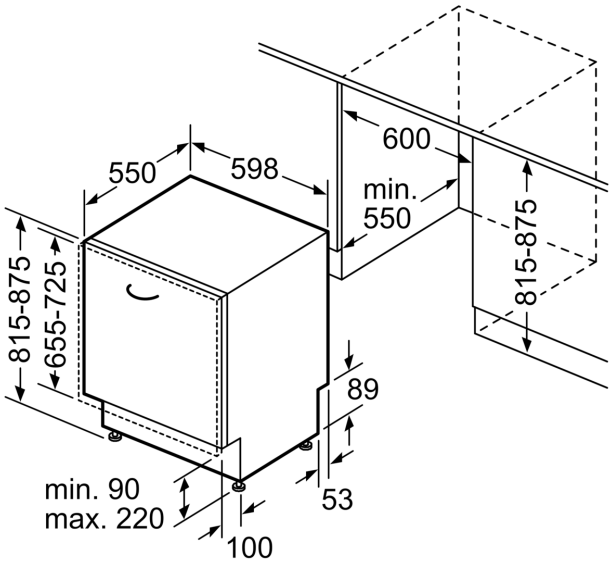

measurements in mm

D Range
undercounter
DISHWASHER

D525 ws

Maidaid **D525 WS** Features

- **2 year warranty**
- Four button bright LED display with soft touch controls, twin traffic lights giving instant status updates & operational self-diagnostics



- Alarms menu with hi-level information retrieval
- Quick release parallel wash & rinse arm design
- Internal continuous water softener as standard
- Triple wash tank filtration system
- Breaktank as standard
- Drain pump as standard
- Three standard cycle time options with a range of special cycles
- Cycle times can be tailored to site requirements
- Comprehensive automatic self-cleaning at end of service
- Selectable energy saving mode
- Selectable thermostop ensures optimum rinse temperatures
- Fully double skinned minimising both acoustic output and reduced heat loss
- Patented dual flow wash pump with soft start – reducing power consumption whilst retaining wash efficiency
- Full door seal and door ajar facility
- Moulded wash tank for easy cleaning
- Moulded rack guide
- Accurate detergent & rinse aid peristaltic dosing pumps as standard
- Surface scrap tray filter supplied as standard



Supplied with one pegged (capable of holding 18 10" plates), one open rack (capable of holding 25 pint glasses) and cutlery insert.

Additional racks can be purchased at point of order: **Z972001** & **Z972003**



For additional information contact our Sales Team on
T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaid.co.uk**

Maidaid reserve the right to alter specifications & dimensions without prior notification, all dimensions will be +/- 3mm.

D Range
undercounter
DISHWASHER

D525 ws



Technical Data

Dimensions (W x D x H)	mm	600 x 630 x 810 + Feet
Feet height	mm	10-20
Rack size	mm	500 x 500
Maximum useable height	mm	365
Door opening	mm	390
Theoretical productivity	Racks/h	40
Effective productivity	Racks/h	30*


*Allowing 30 seconds for reloading
Cycle times may vary depending on local conditions/services

Wash tank element	kW	2.1
Boiler element	kW	6
Wash pump	kW	0.47
Tank capacity	L	15
Noise emission	dB	≤ 55

Packaging Specs

Gross weight	Kg	66
Cubic volume	m³	0.45
Dim. (W x D x H)	mm	670 x 690 x 980

Installation Diagram – All services must be within 1 meter

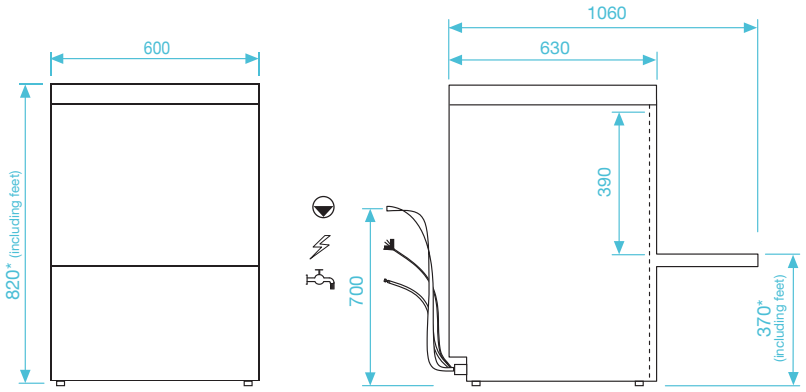

*Height-adjustable feet + 10mm

Power Supply

Installed power	AMP	kW
230V – 50Hz – 1N	13	2.6
	20	4.5
	30*	6.5
Optional 3 Phase config	Total load 6.5kW	
Fused	16 amp	

*Standard configuration

Pumped waste into upstand, maximum height 700mm

Power

Water supply 2 – 4 bar

Water Connection

Inlet water pressure	Bar	2 to 4
Flow rate L/Min	L/Min	6
Water inlet temp	°C	10 to 50
Water connection	BSP	¾"
Waste connection	Ø	Int 19/ext 24

Cycle Information

Number of standard cycles		3
Standard cycles times	Sec	90/120/150 – adjustable
Special cycle		Eco, Glass, Long, Refresh
Self-cleaning cycle		Full self clean
Water consumption per cycle	L	2
Wash temperature	°C	60 – adjustable
Rinse temperature	°C	82 – adjustable

For additional information contact our Sales Team on
T: **0345 130 8070** E: **sales@maidaid-halcyon.co.uk** or visit **www.maidaid.co.uk**

Maidaid reserve the right to alter specifications & dimensions without prior notification, all dimensions will be +/- 3mm.