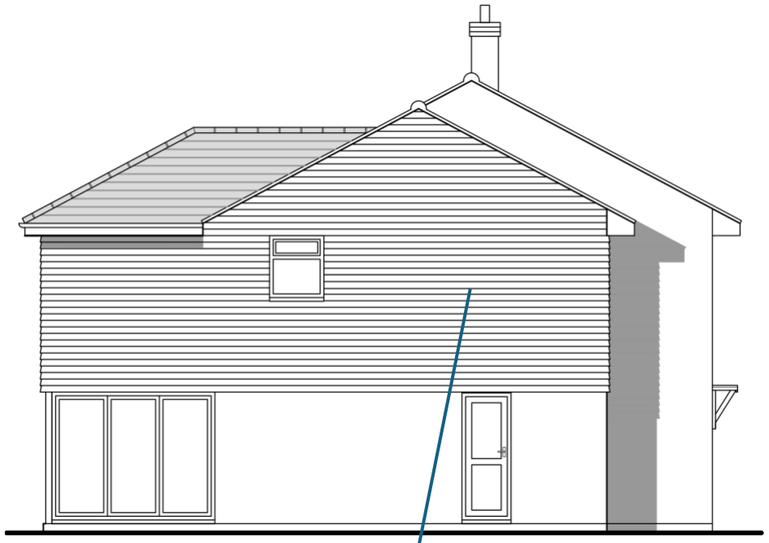

South elevation

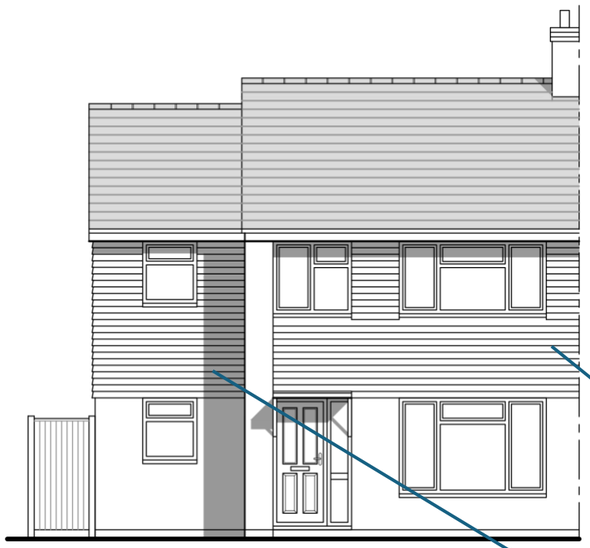

East elevation

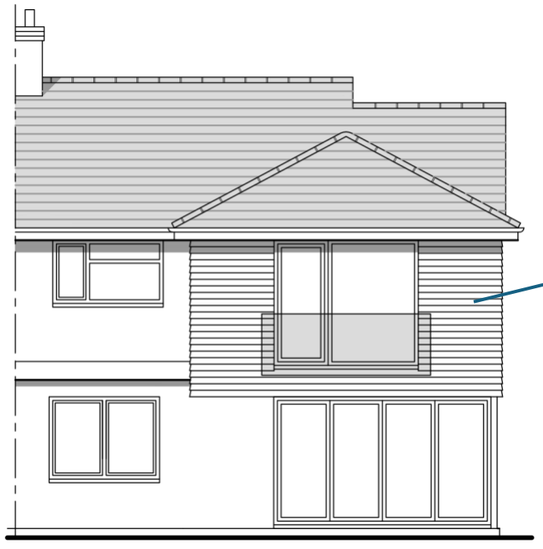

West elevation

Installation of **grey** concrete fibre cladding boards instead of tiles on first story exterior walls.

Fibre cement cladding is manufactured from a combination of natural and synthetic materials, primarily:

- Cement,
- Cellulose Fibres: Derived from wood pulp,
- Sand: Contributes to weather resistance and overall durability & water

Areas indicated to have cladding installed in direction of drawings.

Materials

Walls:
Facing brick to match existing at ground floor level with vertical tile hanging at first floor level.

Roof:
Pitched roofing tiles to match existing.
Singleply warm flat deck.

Windows:
UVPC.

Doors:
UVPC/Aluminium

Scale
0 1 2 3 4 5

Do not scale from drawing except for planning purposes

All dimension are in millimetres

No work is to extend over adjoining properties without express permission

All designs are subject to a structural feasibility analysis

Proposed first floor extension over existing ground floor and two storey rear and side extension

Proposed elevations

7 Lambs Farm Close
Horsham
West Sussex
RH12 4JZ

Plan No: PL/604/03
Scale: 1:100

Drawing size: A3