PCR-E 8.0ltr Shower regulator, White, A5.2221.00001
Finish: Art. no. : **07002282**

Description


Article Details

Price excl. VAT [redacted]

Product image



At a glance

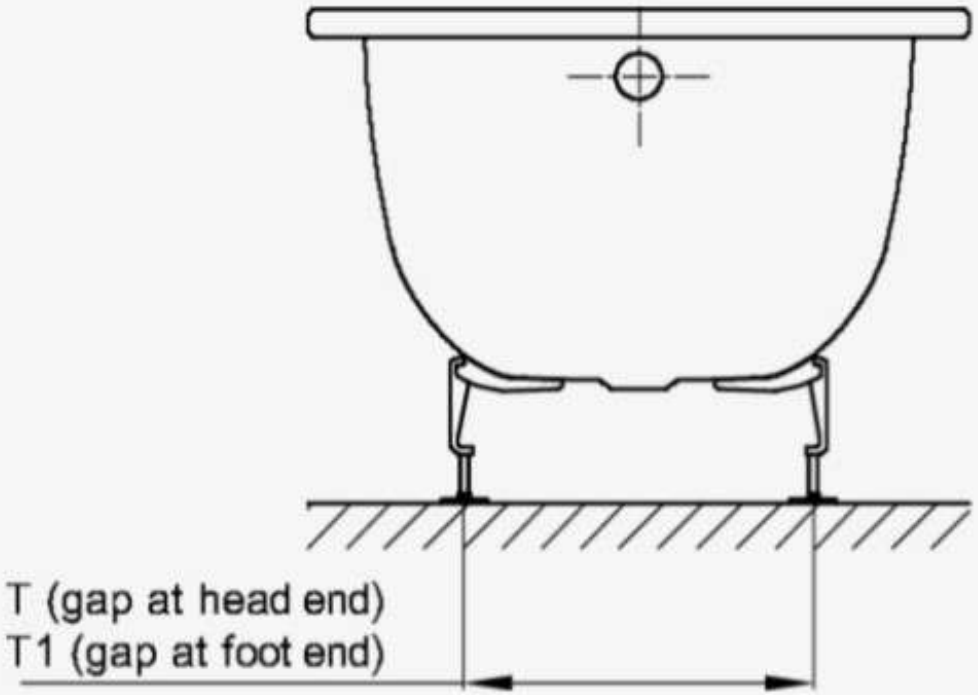


Dimensions:	1700 x 700 x 420 / 1265 mm
Weight:	44,9 kg
Capacity*:	118 l
Rim height:	30 mm
Corner radius:	10 mm
Waste diameter:	52 mm
Lying Dimension:	1265 mm
Technical advice:	For professional installation we recommend the use of the original bath feet B23-1500. This bath is suitable for undermount installation after on-site inspection and proper installation. We can provide you with the relevant cut-out data on request. The BetteForm, 1900 × 800 × 420 mm, article no. 2951, is not available with BetteUpstand or in special size.

*Useful capacity: water capacity minus 70 litres displacement

DO 1007
WALL MOUNTED 2 HOLE BASIN MIXER

FLOW RATES

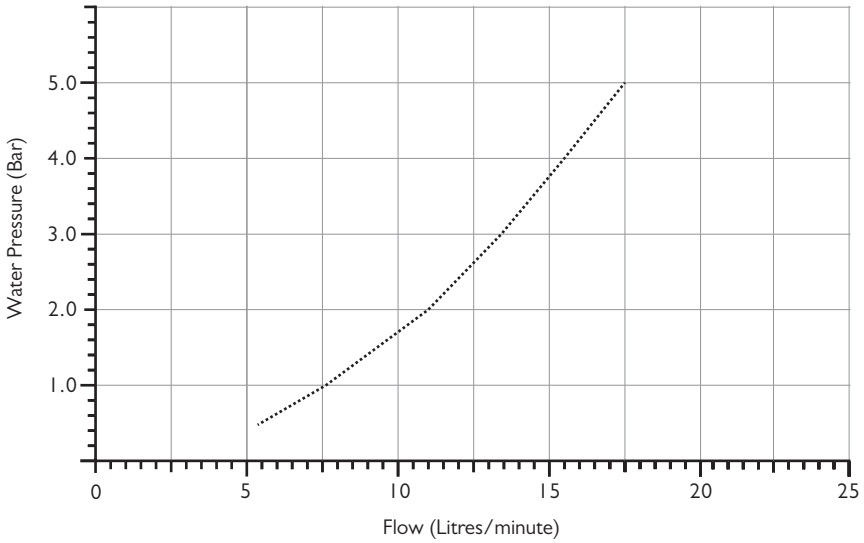

TYPICAL FLOW RATES


Flow rates shown are free flowing and may vary subject to restrictions created by installation, pipework layout or application.


Water Pressure (Bar)	Outlet (Litres/minute)
0.5	5.5
1.0	7.6
2.0	10.9
3.0	13.3
4.0	15.5
5.0	17.4

COALBROOK

Geberit Sigma concealed cistern 12 cm, 6 / 3 litres







APPLICATION PURPOSES

- For drywall construction
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing WCs

CHARACTERISTICS

- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Cistern fulfils standard requirements in accordance with EN 14055, Class II
- Immediate post flush possible with factory setting
- Flush bend fitted
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection cover box for service opening protects against moisture and dirt
- Protection box for service opening can be cut to length

TECHNICAL DATA

Flow pressure	0.1–10 bar
Operating temperature, water max.	25 °C
Flush volume, factory setting	5.8 / 3 l
Flush volume small, adjustment range	2–4 l
Product material	Plastic

SCOPE OF DELIVERY

- Water supply connection R 1/2", compatible with MasterFix and MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Flush bend 90°
- Fastening for flush bend
- Protection plug
- 2 slotted flat irons
- 2 fixing brackets
- Fastening material
- Flush bend extension, ø 45 mm

INFO

- Cistern can be mounted at a lower height (98cm) as the flush pipe can be cut down.
- Flush valve features settings to enable either a 6 l and 3 l flush, 4.5 l and 3 l flush. or 4 l and 2,6 l flush . Note: must be used with pans designed for low volume flush.
- The cistern can be operated with used water (rainwater) provided it is passed through a filter system first

Art.no.	B cm	H cm	T cm
109.309.00.5	41	51	12


Datasheet

PCW-01 1/2“ Washer Regulators
Metric Flow Rates

NEOPERL®
flow, stop and go®

PCW-01 1/2“ washer regulators are flow regulators with an added sealing function. These water savers are easy to install and fit in any ½“ connection, making them the perfect retrofit solution for existing shower handles, shattafs or wall/ceiling-mounted shower heads.

The PCW-01 washer regulator must be tightened with a torque of 2 Nm max. Observe the direction of flow.

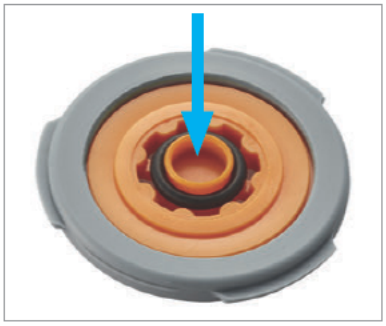

PCW-01 1/2“ washer regulator

Materials used


Housing:	POM
O-ring:	EPDM
PCW washer:	silicone

Model Overview

PCW-01 Washer Regulators

Model / Flow rate	Color Code	Part no. PCW-01	Flow tolerance (in %)	Pressure range (in bar)
PCW-01 1/2“ 2.0 l/min.	olive	58.8632.100	+30 / -30	1.0 - 10.0
PCW-01 1/2“ 3.0 l/min.	brown	58.8633.100	+30 / -30	1.0 - 10.0
PCW-01 1/2“ 4.0 l/min.	dark grey	58.8634.100	+20 / -20	1.0 - 10.0
PCW-01 1/2“ 5.0 l/min.	yellow	58.8635.100	+20 / -20	1.0 - 10.0
PCW-01 1/2“ 6.0 l/min.	black	58.8636.100	+10 / -10	1.0 - 10.0
PCW-01 1/2“ 7.0 l/min.	light green	58.8637.100	+10 / -10	1.0 - 10.0
PCW-01 1/2“ 8.0 l/min.	natural white	58.8638.100	+10 / -10	1.0 - 10.0
PCW-01 1/2“ 9.0 l/min.	orange	58.8639.100	+10 / -10	1.5 - 10.0
PCW-01 1/2“ 10.0 l/min.	light blue	58.8640.100	+10 / -10	1.5 - 10.0
PCW-01 1/2“ 11.0 l/min.	brown	58.8641.100	+10 / -10	1.0 - 10.0
PCW-01 1/2“ 12.0 l/min.	red	58.8642.100	+10 / -10	1.5 - 10.0
PCW-01 1/2“ 15.0 l/min.	lime green	58.8650.100	+10 / -10	3.0 - 10.0

Flow Curves

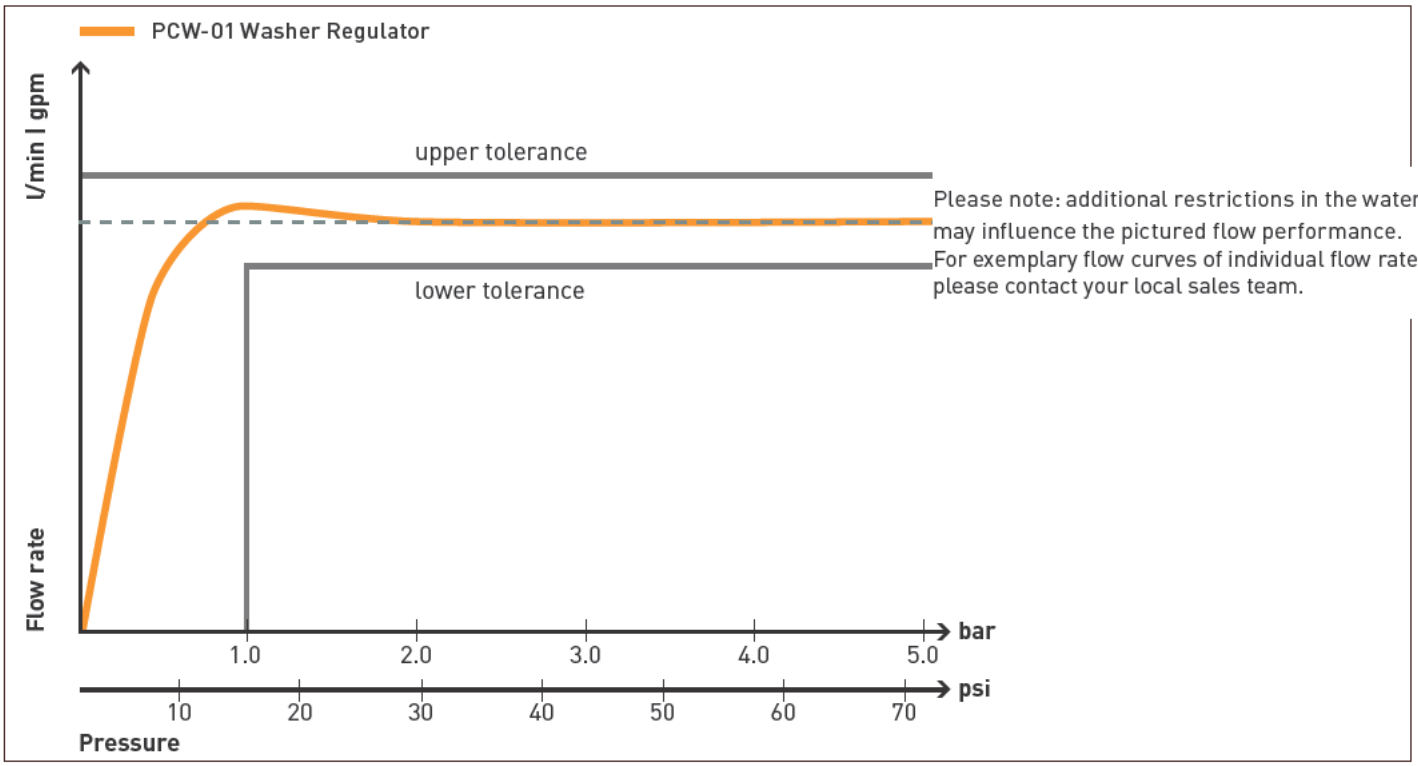


Datasheet


PCW-01 1/2“ Washer Regulators
Metric Flow Rates

NEOPERL®
flow, stop and go®

Dimensions (in mm)

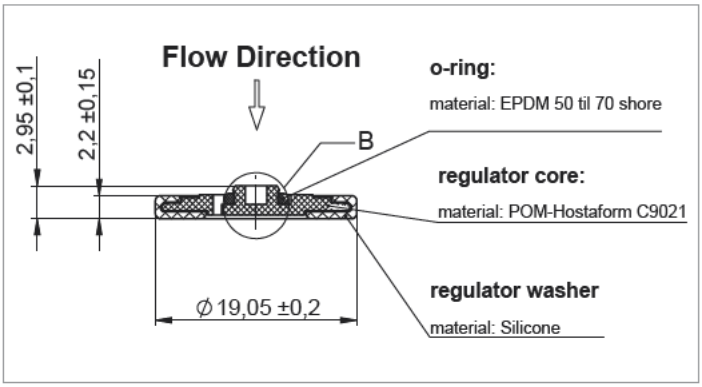

PCW-01 1/2“ washer regulator

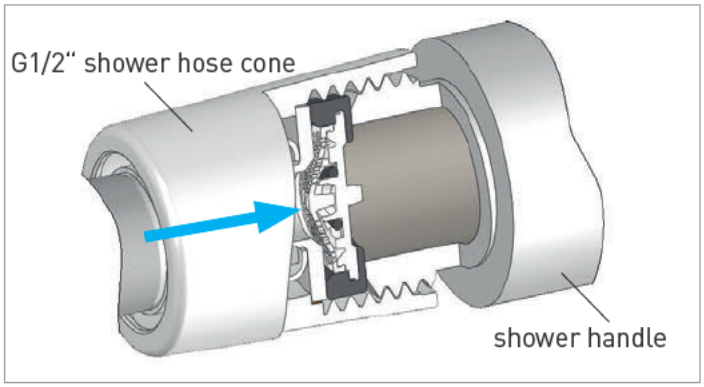


Recommended mounting position for shower handles


Intended Use


Drinking water only


Shower handles


Shower heads


Bib taps/ wall spouts



Shattafs/ bidet showers


Assembly Instructions

ATTENTION!
Product may not be altered!
May not be used for hot water application exceeding 70°C

ATTENTION!
Max. mounting torque 2.0 Nm

Operating Conditions





Indicated pressure values refer to supply line pressure.
Avoid water hammer.

Patents granted

Trademarks are registered in various countries