
Technical Data Sheet

Product range: VOS

Product code: 28ROUND/WS/MB ,23ROUND/WS/BBR, 27ROUND/WS/BBL, 21ROUND/WS/BRZ

Finishes Available: Matt Black, Brushed Brass, Brushed Black, Bronze

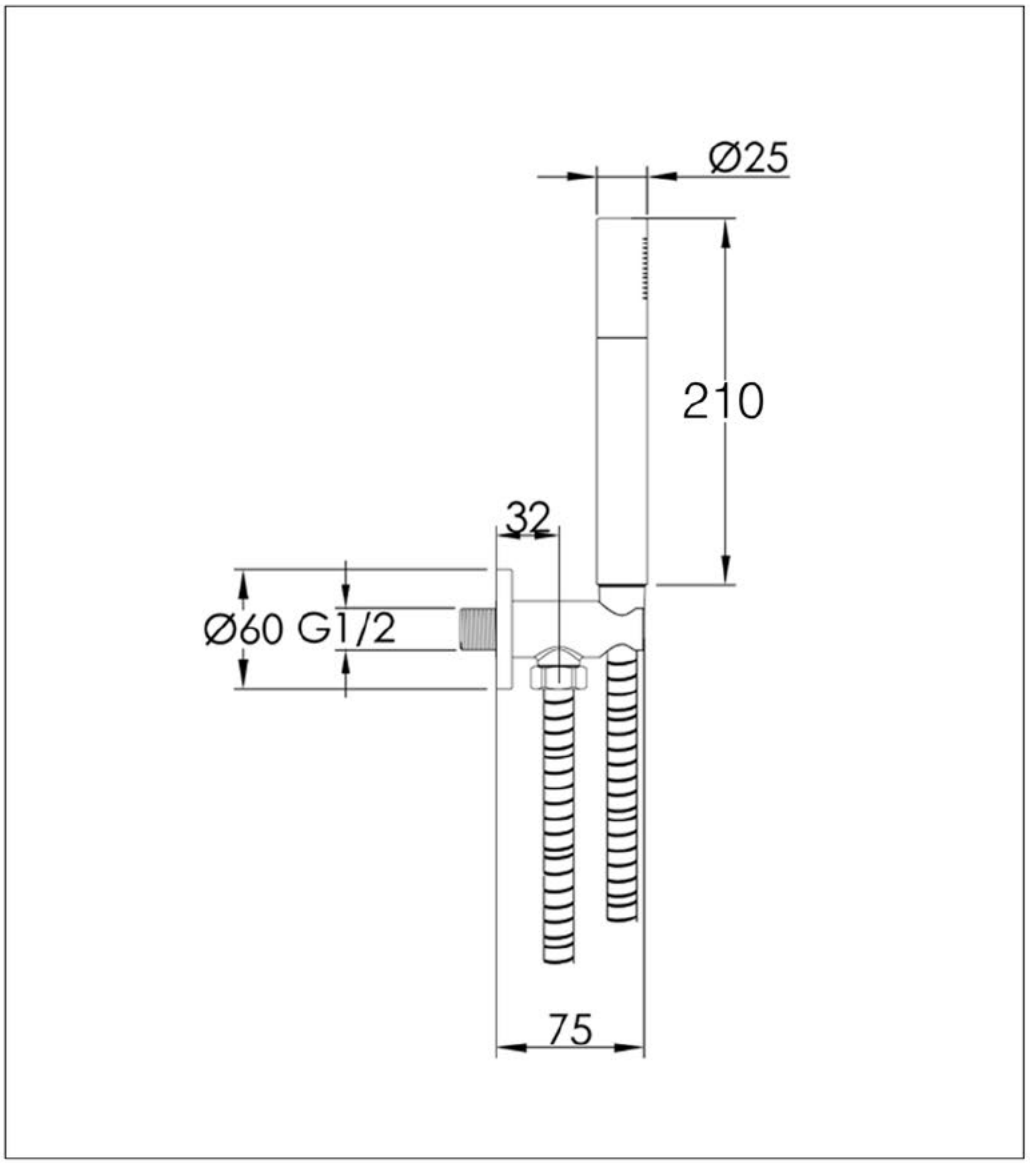

Min Pressure:
LP 0.2

Approvals:
WRAS

Connections:
G 1/2"

Warranty:
15 Years (5 on cartriges)

Flow Rate

0.2Bar: 4.8L/min

0.5Bar: 5.6L/min

1Bar: 7L/min

2Bar: 9.6L/min


3Bar: 12L/min

Technical Data Sheet

Product range: VOS

Product code: 28200MB

Finishes Available: Matt Black

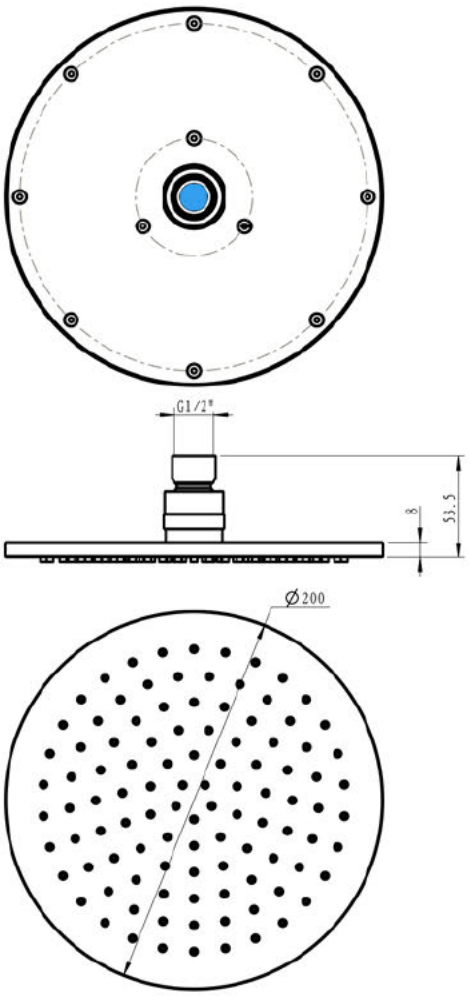

Min Pressure:
MP 0.5

Approvals:
WRAS

Connections:
G 1/2"

Warranty:
15 Years

Flow Rate

1Bar: 10.3L/min

2Bar: 17L/min

3Bar: 27.3L/min


jtpuk.co.uk
technical@jtpuk.co.uk
01895 442211

Technical Data Sheet

Product range: VOS

Product code: 28273MBSP, 23273BBRSP, 27273BBLSP
DH28273MBSP, DH23273BBRSP, DH27273BBLSP

Finishes Available: Matt Black, Brushed Brass, Brushed Black

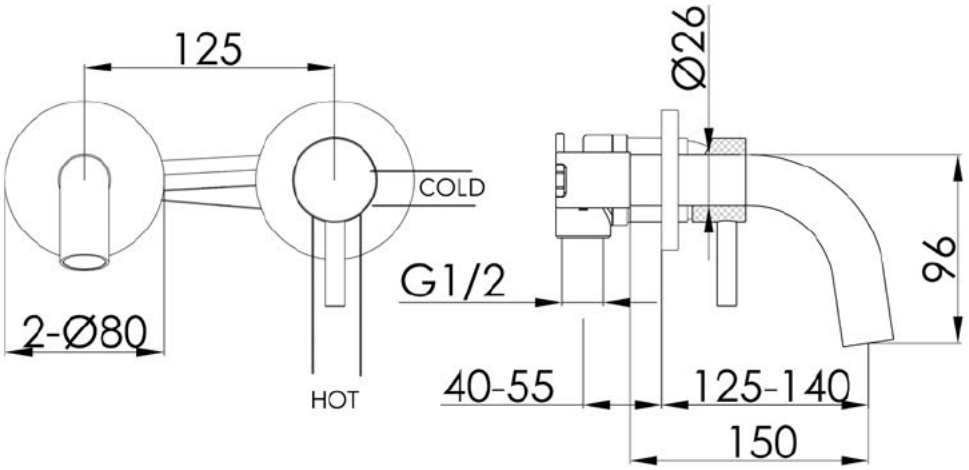

Min Pressure:
MP 0.5

Approvals:
WRAS

Connections:
G 1/2"

Warranty:
15 Years (5 on cartriges)

Flow Rate

0.2Bar: 4.9L/min

0.5Bar: 5.6L/min

1Bar: 7.3L/min

2Bar: 9.7L/min

3Bar: 12.2L/min

jtpuk.co.uk
technical@jtpuk.co.uk
01895 442211



AERATOR CONVERTER KITS

Aerator converter kit suitable for most screwed spout outlet connections replacing the current stream straightener. Available in 1.7 litre spray wash hand basin, 3.5 litre aerated column general basins or 5.0 litre aerated column

FL2 [redacted]



ECONOMY SHOWER REGULATORS


Economy shower regulator suitable for accurate flow control to mains pressure feed systems only. Can be fitted in any 1/2" flat face connection, shower hose or flexible tap connectors. Come complete with integral gasket. Available in 6.0 litre, 8.0 litre, 10.0 litre or 12.0 litre flow rates

FL4 [redacted]

A06E

Flush valve Ecology for pre-wall installation systems



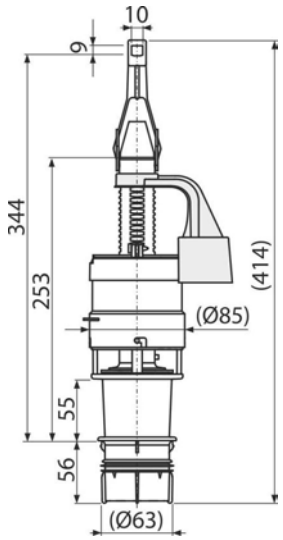

Application

For pre-wall installation systems with height of 1000, 1120, 1200 mm
For water-saving flushing 2/4 l

Features

- STOP button to adjust the amount of discharged water
- Dual flush
- Compatible with pre-wall installation systems A100, A101, A102, A115, A116, AM100, AM101, AM102, AM115, AM116 with height of 1000, 1120, 1200 mm
- Material: ABS

Scope of supply

- Valve
- Outlet DN60 mm for installation in the cistern

Order number, Logistic information

Code	EAN	Weight (piece | packing | palett)	Dimensions (piece | packing)	Quantity (packing | palett)
A06E	8595580511258	0,31 | 7,64 | 142,2 kg	440×140×100 | 590×430×390 mm	25 | 400 pcs

Warranty

2/3 years *

Norms

EN 14055

Technical specifications

- Functional requirements class I
- Small flush 2-4 l
- Factory setting of small flush 2 l
- Factory setting of large flush 4 l
- Big flush 3,5-6 l

* For more information about warranty visit https://www.alcadrain.com/warranty.

© 2024 Alcadrain s.r.o | Changes in dimensions and design reserved. | www.alcadrain.com

AM101/1000-0005 WRAS

Pre-wall installation system for dry build up (plasterboard)




Application

For mounting in front of a support wall or in to a plasterboard construction
For installation of wall-hung WC pans with a connecting pitch of 180 mm or 230 mm
For floor thickness 0–200 mm
For wall-hung WC

Features

- Dual flush independently adjustable with hygienic reserve
- Compatible with all ALCA flush plates
- The construction of polystyrene insulation prevents condensation forming on the surface of the tank and dampens the vibrations from the tank into the building structure
- The frame allows the anchoring to a separate sufficiently strong plasterboard partition, in front of the bearing wall
- The service opening cover simplifies assembly and prevents the penetration of moisture and impurities
- Frame material: powder-coated metal
- Installation depth adjustable from 20–95 mm
- Suitable for installation of remote or sensor flushing
- Possibility of tilting the cistern for easy installation in wooden construction buildings or mobile cells
- The cistern is made of one piece, thus ensuring 100% impermeability
- The installed module is covered with a plasterboard panel and there is no need for any additional fixing or anchoring elements
- Adjustable anchor feet and a spring-lock system, with a range of 0–200 mm
- Dispenser for WC cistern tablets included
- Sliding rail holder for the waste connector can be set to eight positions between 0–93 mm
- Prepared for connecting a bracket with a DG 1/2" conversion for bidet seats and sprays
- Water supply from the rear/top
- Angle valve with the ability to connect to the Mepla piping system
- Maintenance work without using any tools
- Installation depth 125 mm
- Wall Hung Toilet Frame and Concealed Cistern AM101 certified according to WRAS standard (certificate no. 2206330)
- Cistern hinges made of two-component material insulate the transmission of vibrations from buildings

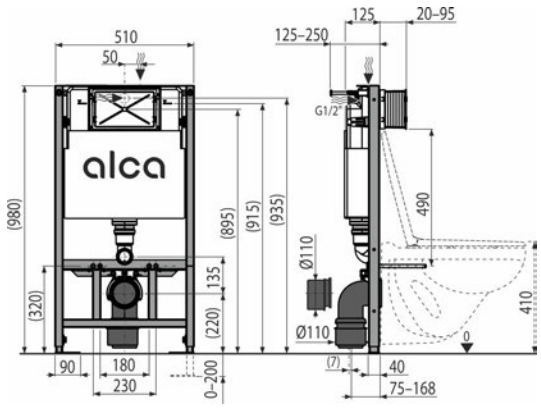

Scope of supply

- Fixation material for fixing the WC pan: threaded rod M12 – 2 pcs, washers – 4 pcs , cover – 2 pcs, nut – 2 pcs, thread protector – 2 pcs
- Fixation set: screw Ø8×60 – 4 pcs, dowel Ø12 – 4 pcs
- Elbow waste connector HT 90/90 polyethylene, PE-HD
- The 2 piece cover of the service opening is simply adjustable
- Cistern with fill and flush valve
- Waste reduction HT 90/110 polyethylene, PE-HD
- End-caps set for protecting the connecting holes during installation of the system
- Set for inserting toilet tablets
- Self-supporting frame
- Fittings 1/2" water connection with the integrated angle valve Schell 1/2–3/8"
- Drainage seal, PP connector, connector seal
- Inlet seal, PP outlet, wrapping seal

Order number, Logistic information

Code	EAN	Weight (piece | packing | palett)	Dimensions (piece | packing)	Quantity (packing | palett)
AM101/1000-0005	8595580581664	13,70 | 13,70 | 294,5 kg	1130×145×520 | 1130×520×145 mm	1 | 20 pcs

Warranty

2/15 years *

Norms

EN 14124, EN 14055

Technical specifications

- Recommended range of water pressure 0,3-0,5 MPa
- Functional range of water pressure 0,05-1,0 MPa
- Hygienic reserve 3 l
- Small flush 2,5-3,5 l
- Water volume in the cistern 9 l
- Water connection from the back or top via mounting holes G1/2 "
- Factory setting of small flush 3 l
- Factory setting of large flush 6 l
- Big flush 6-9 l
- Load test 400 kg

* For more information about warranty visit https://www.alcadrain.com/warranty.

© 2024 Alcadrain s.r.o | Changes in dimensions and design reserved. | www.alcadrain.com