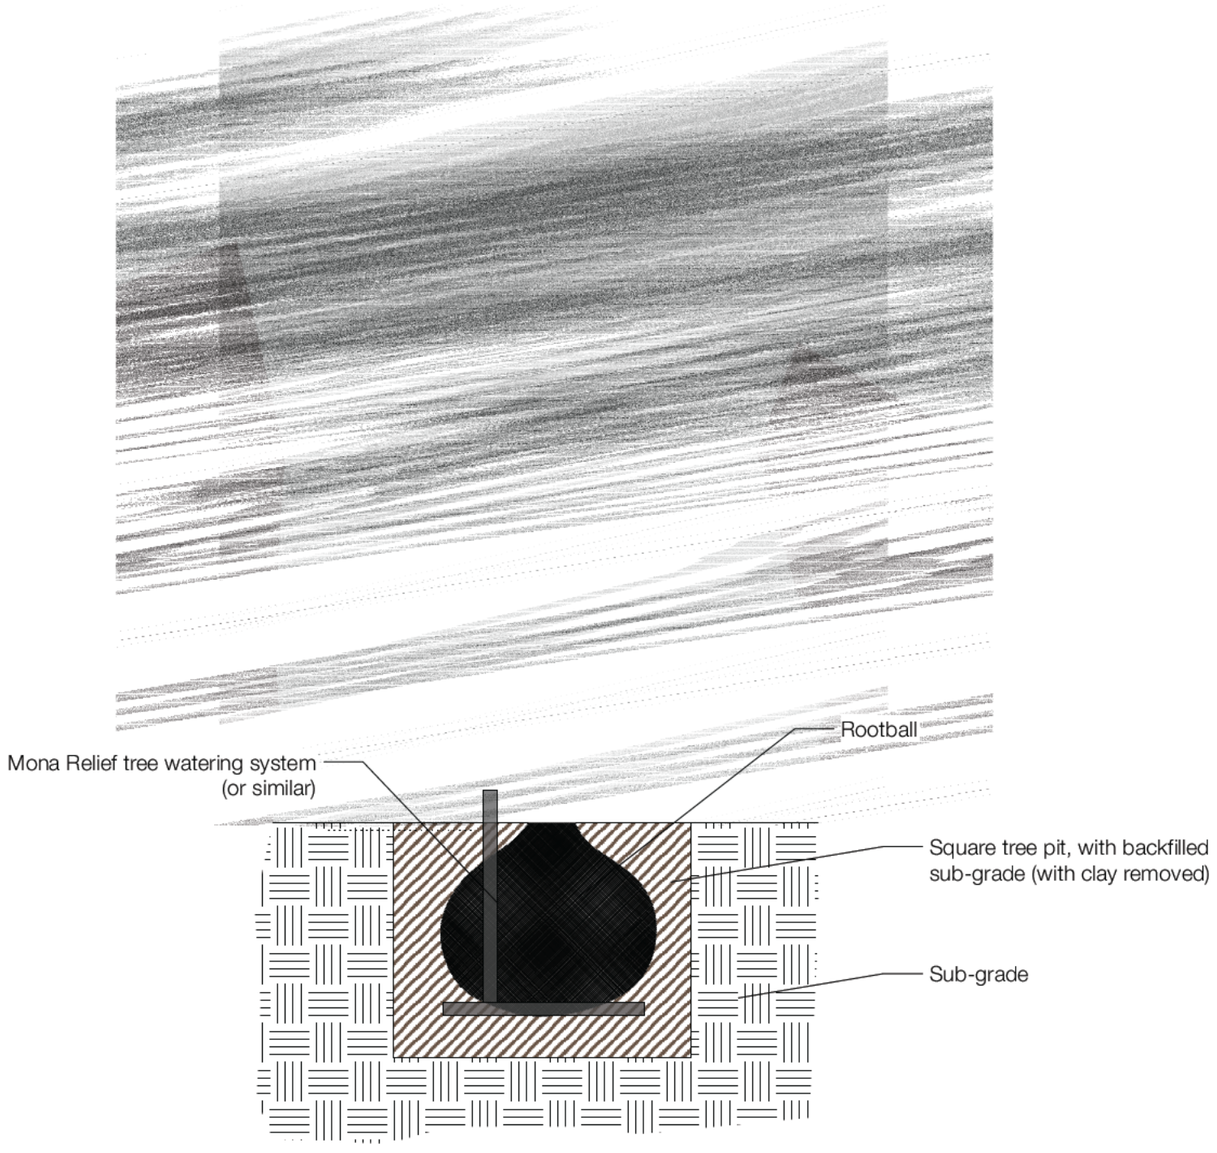

Tree planting

Assume 60-70cm dia rootballs. Dig a square hole 25% bigger than rootball and 5cm shallower than the rootball. Note: If base of excavated treepit is clay, remove a further 30cm and replace with topsoil mixed with horticultural grit firmed down.Install tree watering system (Mona Relief or similar). Once tree is in final position backfill/replace soil and firm down. Crown should not be lower than soil level. Cover with bark chip mulch and water well. Timber tree stakes may be required - to be confirmed once trees are ordered

© 2024. Do not scale. Verify all dimensions before commencing work. Report suspected discrepancies or omissions immediately

Project	Title	Drawing No.	Version/Date	Scale
East Wantley Cottage	Tree planting detail	128-04	V1 11/07/24	1:25 @ A3

[redacted]
e: info@simonorchardgardens.com w: www.simonorchardgardens.com
SIMON ORCHARD GARDEN DESIGN