

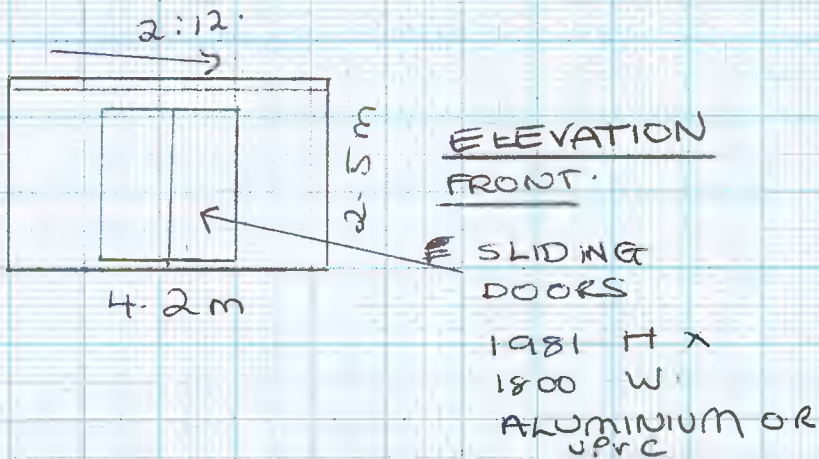


1:100
DC/25/2070

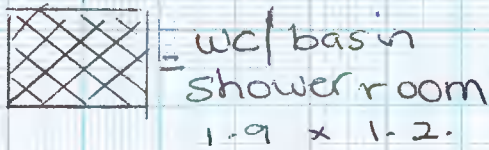

TIMBER FRAME CONSTRUCTION ON
CONCRETE RAFT FOUNDATION.
LEAN-TO LOW PITCH ROOF - 2.5m -
WITH GRP OR SIMILAR ROOF
COVERINGS. CLAD EXTERNALLY
WITH TIMBER / PLASTIC CLADDING
WALLS / CEILINGS TO BE INSULATED
AND PLASTERED.
WINDOW & DOOR - UPVC

ROOF GRADIENT MINIMAL AS GRP.

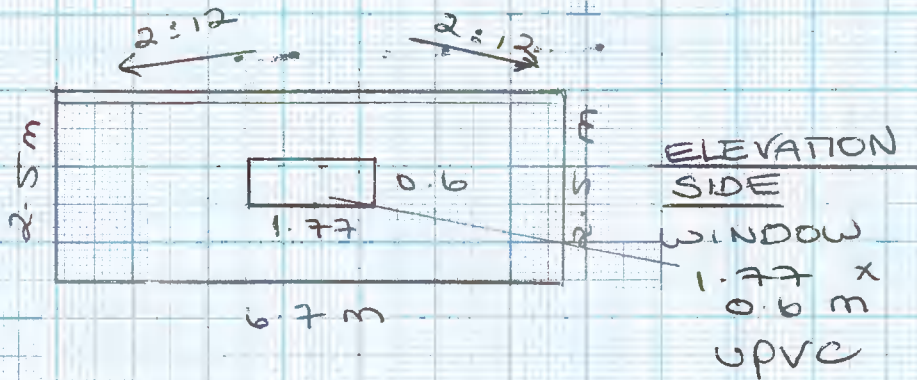

1cm = 1m