REASONS FOR PROPOSED TREE WORK

T1 Pedunculate oak:

- Shorten the western crown spread by maximum of c.3m to clear the neighbouring property
- Prune the southwestern and northwestern crown spread by a maximum of c.2m to achieve a more natural looing crown shape

	Current branch length	Finished branch length
South	11.5m	9.5m
West	11.5m	9.5m
North	12.0m	10.0m

- Suitable secondary growth in line with BS3998:2010 Tree Work – Recommendations will dictate the final pruning point, therefore please allow for +/- 50cm to achieve the desired pruning points

- Remove deadwood greater than 25mm in diameter from throughout the crown, including the crown spread over the neighbouring property to the north

The pruning is intended to achieve an acceptable clearance from the tree to the neighbouring property whilst maintaining an aesthetically pleasing tree

Deadwood is exempt but included as part of the overall work program

T4 Pedunculate oak:

- Shorten the south, southwestern and western crown spread by maximum of c.2m

	Current branch length	Finished branch length
South	10.0m	8.0m
West	9.5m	7.5m

- If deemed appropriate/feasible, reduce the two tertiary stem sections highlighted below back to their unions with their parent stem sections
- If this is achievable, there may be no need to prune the branch lengths on this section of the crown; however, this will not be known until the two sections are removed



Tertiary stem sections to be removed to the union with their parent stem sections – red line on the photo

- Suitable secondary growth in line with BS3998:2010 Tree Work – Recommendations will dictate the final pruning point, therefore please allow for +/- 50cm to achieve the desired pruning points
- Remove deadwood greater than 25mm in diameter from throughout the crown

The pruning is intended to allow greater light into the north elevation windows of the property and reduce the lever arm motion of the southern crown spread – in the summer of 2024 a large tertiary stem failed narrowly missing the property


Deadwood is exempt but included as part of the overall work program

T6 Pedunculate oak:

- Shorten the south and southwestern crown spread by a maximum of c.2m – please see below for an approximate line of pruning

	Current branch length	Finished branch length
South	8.5m	6.5m
West	8.0m	6.0m

- Suitable secondary growth in line with BS3998:2010 Tree Work – Recommendations will dictate the final pruning point, therefore please allow for +/- 50cm to achieve the desired pruning points
- Remove deadwood greater than 25mm in diameter from throughout the crown

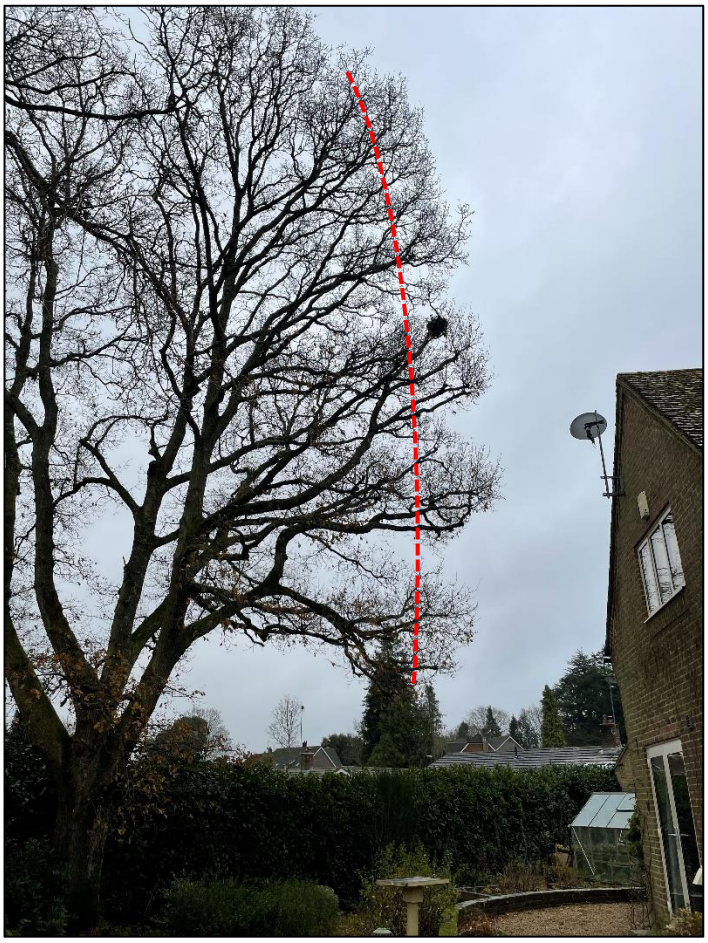

Approximate line of pruning on the southern crown spread to achieve greater light into the northern aspect of the property

The pruning is intended to allow greater light into the north elevation windows of the property and reduce the lever arm motion of the southern crown spread

Deadwood is exempt but included as part of the overall work program