Consulting Civil Engineers

Water Neutrality Report

South Downs Aperies Ltd, Coneyhurst Road, Billingshurst RH14 9DG

For

White & Sons

Rev – **P3**

Reference **C3306**

Date **15th January 2025**

Revision	Date of Issue	Comments	Prepared By	Checked By
P	05/08/2024	Initial Issue	LH	CS
P1	03/12/2024	Revised	LH	CS
P2	18/12/2024	Revised	LH	CS
P3	15/01/2025	Revised	LH	CS

Richard Cobden House, Lion Street, Chichester, West Sussex, PO19 1LW
Tel: 01243 933253 E: mail@cgscivils.co.uk **W:** www.cgscivils.co.uk


1 Introduction

1.1.1 CGS Civils Ltd has been appointed by White & Sons to undertake a Water Neutrality Report for a proposed development at South Downs Aperies Ltd on Coneyhurst Road, Coneyhurst. The proposed scheme consists of erection of an agricultural building that is to be utilised for the storage of bee equipment and the extraction and processing of honey which occurs within late Spring and Autumn.

1.1.2 The site falls within the Sussex North Water Supply Zone, in which Natural England have written to all authorities within the zone providing a position statement for applications which may place increased pressure on this zone. This explains that recent case law has established that abstraction from the Supply Zone may be having an impact on protected sites (Arun Valley Special Area of Conservations (SAC), Special Protection Area (SPA) and Ramsar site).


1.1.3 As a result, developments within this zone must not add to this impact, as such, the purpose of this report is to therefore provide an overview on the potential water usage changes on the site as a result of the proposed development, and to confirm that the site is water neutral.

Fig 1. Sussex North Water Supply Zone Area

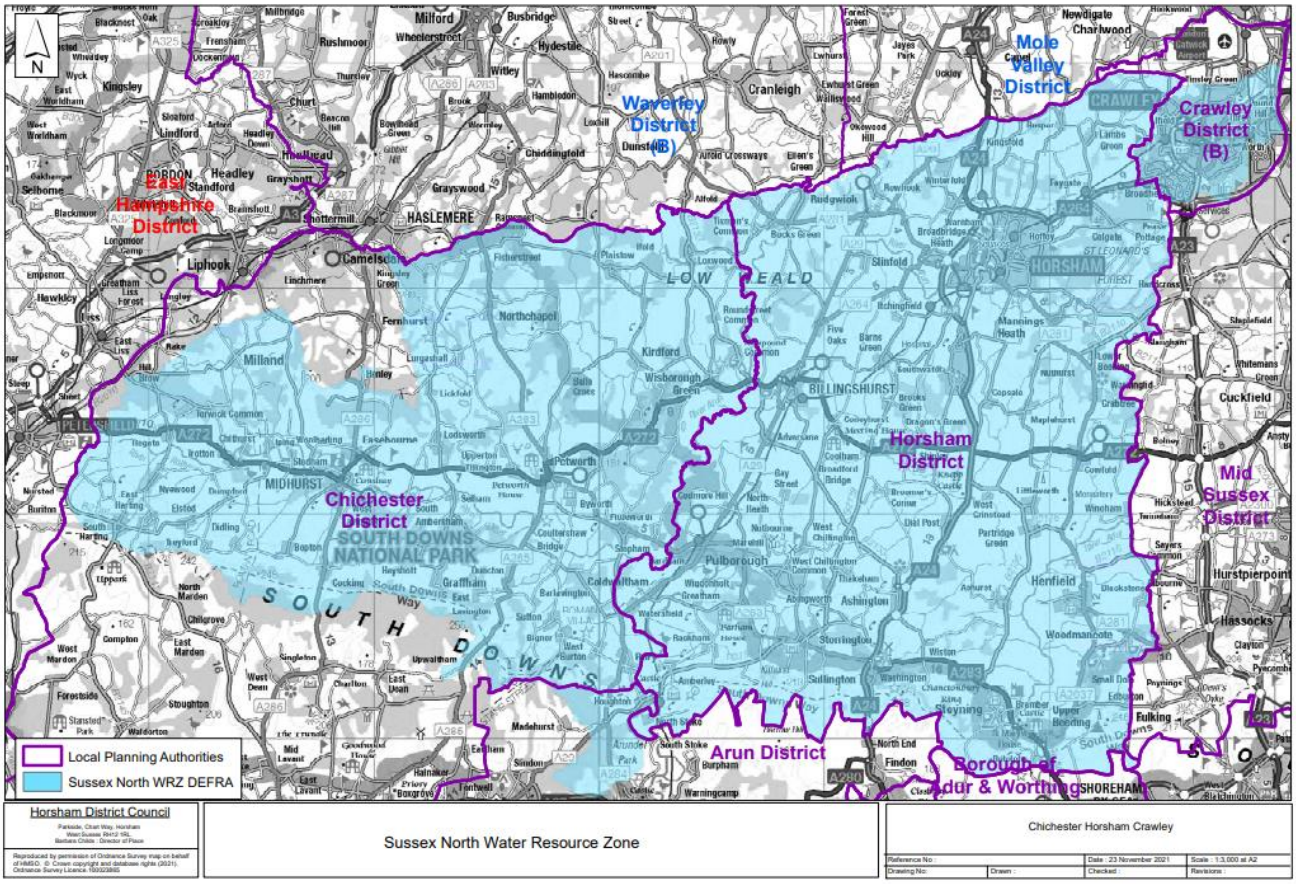

1.1.4 The proposed development is located at OS Grid Reference TQ 10255 24152 and has the post code RH14 9DG

Fig 2. Site Location

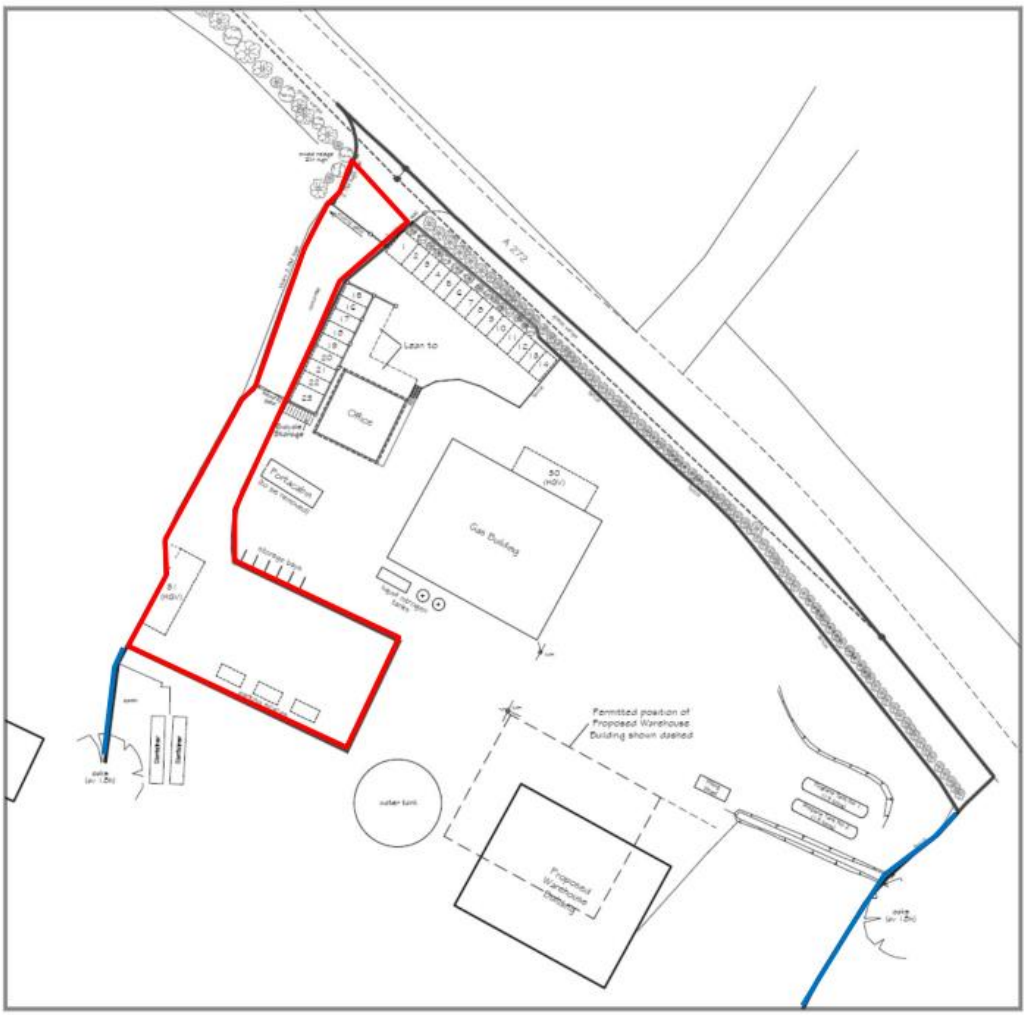

1.1.5 Waterwise defined Water Neutrality as:

'For every new development, total water use in the region after the development must be equal to or less than the total water uses in the region before the new development.'

1.1.6 Achieving water neutrality involves using a three-step approach. First, the demand for water from the new development must be reduced as far as is practicable, followed by the re-use of water; then the remaining demand should be offset within the region. Following this three-step approach allows the volume that requires offsetting to be reduced which ultimately reduces the cost of the overall scheme. This is noted within the Waterwise neutrality definition, which defines the three steps which should be undertaken in order to achieve water neutrality in their recent review dated January 2021.


- Reduce water demand in the new development through improvement in efficiency.
- Re-use water, wherever possible.
- Offset the remaining water demand from the new development if required.

1.1.7 The report will be split into the following sections:

- A Review of Water Neutrality demand reduction
- A calculation of estimate water usage from proposed development
- Identification of measures that can be first used to reduce this demand
- Identification of measures that can be used to re-use water
- Establish solutions to offset that demand in order to achieve neutrality.

1.1.8 This report will follow the methods documented within *'A Review of Water Neutrality in the UK'* carried out by Waterwise in January 2021. The document provides details on how developments can achieve water neutrality by utilising the 3-stage approach.

Fig 2. 3-stage approach

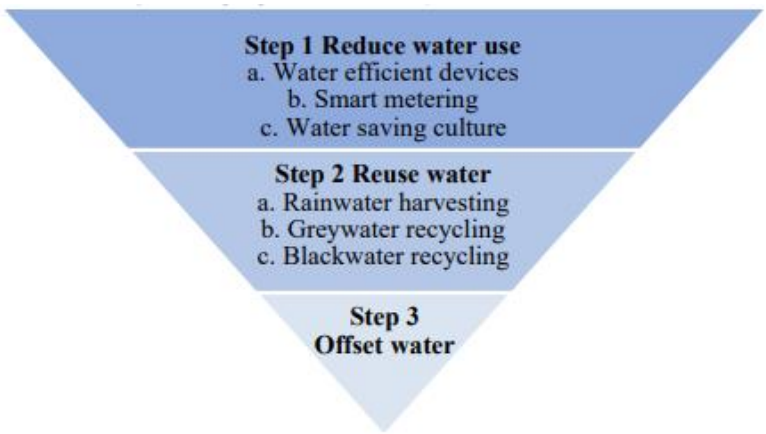

1.1.9 The benefits of water neutrality are wide ranging, from financial and reputational to environment and social. For a new domestic building, they could include:

- **Saving Water** – Over 100,000 litres of water can be saved per year for each water neutral home built
- **Saving Carbon** – A significant CO2 saving can be achieved by reducing the demand for hot water for baths, showers, basins, dishwashers and washing machines
- **Saving Money** – Both water and energy bills will reduce
- **Reducing environmental impact** – Decreasing water abstracted from rivers and groundwater sources
- **Improved Resilience** – For the future by minimising the additional pressure on water resources
- **Enabling future housing growth** – In water scarce areas by reducing the impact of new homes and buildings
- **Reducing discharge to sewage** – by using less water, collecting rainwater and recycling greywater, less water is discharged to the drainage network
- **Short pay-back time** – After approximately 5 years the saving of water neutrality will outweigh the costs of doing so.

2 Executive Summary

2.1.1 The proposed scheme consists of the erection of an agricultural building that is to be utilised for the storage of bee equipment and the extraction and processing of honey which occurs within late Spring and Autumn. As proven within this report, the use of rainwater harvesting will result in a water neutral site

Table 2 Water Usage Comparison

Existing Water usage	**0 l/day**
Proposed Scheme water usage prior to mitigation	9.6 l/day
Proposed Scheme water abstraction post mitigation	0 l/day
Proposed Scheme water usage equal to or lower than existing site	Yes

3 Calculation of estimated water usage from the proposed development

3.1.1 Before any necessary steps to achieve water neutrality can be determined, the total water demand for the proposed development must first be calculated. The proposed scheme will consist of the construction of an agricultural building for the storage of bee equipment and the extraction/processing of honey which will occur within late spring and autumn.

3.1.2 There is to be two Apiary staff which will spend the majority of the time off-site visiting other apiary sites and if they are on site, they will make use of the existing site facilities. The honey extraction process would take place twice a year within May/June and also within September, and after which the equipment will be cleaned down via a pressure washer. A standard pressure washer uses on average **350 l/hr** or **5.83 l/min**, this equates to approximately **87.45 l/day** for a 15-minute clean of the machinery.

3.1.3 The washdown of machinery will take place during 8 weeks of the year, and it can be assumed that the extraction and processing of honey will take place during the 5 days of a working week. It can be calculated that over the 8 weeks, there will be 40 working days and at a water usage of **87.45 l/day,** the total water demand will be **3498 litres per year** or **9.6 l/day** or **0.0096m³/day.**

4 Step 1 – Identifying measures that can be used to reduce this demand

4.1.1 There are not measures that can be used to reduce the water demand.

5 Step 2 – Identify measures that can be used to re-use water

5.1.1 Once the water demand has been reduced via the installation of water efficient products, water reuse should be considered. The term 'water reused' refers to the capture, treatment (if it is required) and the use of alternative water supplies for non-potable purposes. It includes:

- Rainwater and surface water harvesting

5.1.2 In this instance however, rainwater harvesting is proposed to enable total self-sufficiency within the building. The proposed pressure washer will have the water supplied by the rainwater harvesting tank. The harvesting tank is to supply 9.6 l/day or 0.0096 m^3/day of water to the pressure washer.

5.1.3 The proposed roof area is sufficient to provide the required water to the property via a rainwater harvesting tank as well as has sufficient capacity for a 35-day drought period. **See Appendix C**.


5.1.4 By installing the water efficient devices, the total demand will be reduced to **0 l/day.**

Table 9 Part G rainwater collection calculator

Rainwater Collection Calculation	
Collection Area (m^2)	375
Yield Coefficient	0.8
Depth of rainfall (mm/year)	805
Daily rainwater collection (litres)	661.2

5.1.5 A calculation is to be made to ensure that the rainwater harvested is greater than the rainwater demand within the dwelling. The following is a calculation for 5% of the annual rainwater yield and has been calculated using Rainfall data from the National River Flow Archive which provides annual rainfall data as recorded by the Met office and follows the intermediate approach as detailed within BS 8515:2009.

5.1.6 Using the rainfall catchment data provided by the National River Flow Archives, the closest station point to the site is 41014 – Arun at Pallingham:

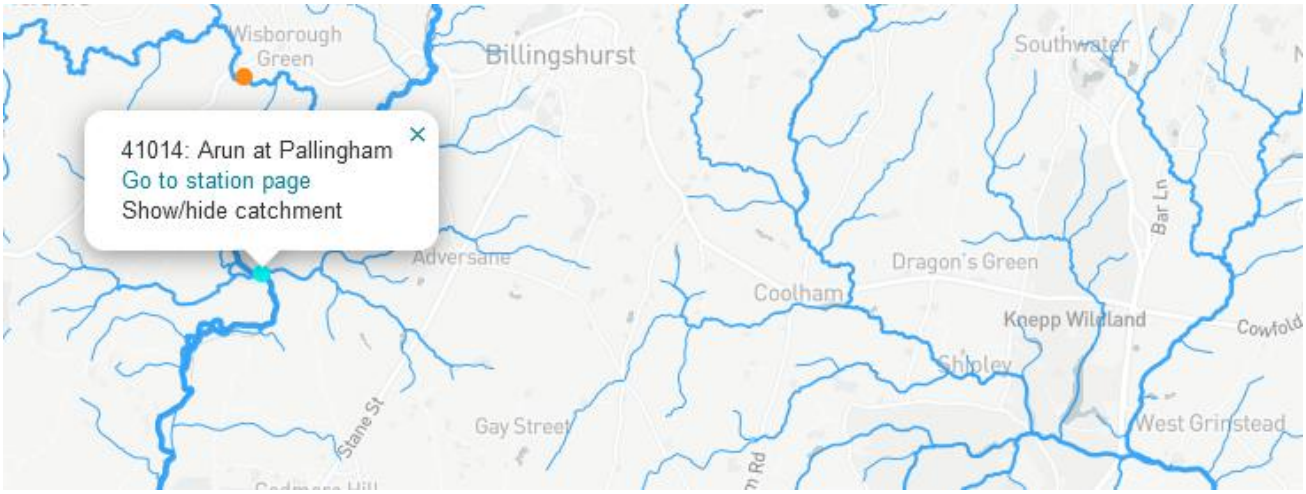

5.1.7 The latest data available for this station is SAAR 1961-1990, which shows that the depth of rainfall in the area is 805mm.

$$Y_R = A \times e \times h \times n \times 0.05$$

Where:

Y_R = the annual rainwater yield (l)
A = The collecting area (m^2)
e = yield coefficient (%)
h = depth of rainfall (mm)
n = hydraulic filter efficiency

$$\underline{\mathbf{11471.25}} = 375 \times 0.8 \times 805 \times 0.95 \times 0.05$$

5.1.8 In order to ensure there is sufficient roof area, another calculation from BS 8515:2009 must be carried out in order to calculate the annual demand within the property. The following is a calculation for 5% of the annual non-potable water demand. (This will take into account full water usage within the property to ensure it can be entirely self-reliant).

$$D_N = P_d \times 365 \times 0.05$$

Where:


D_N = the annual non-potable water demand (l)
P_d = The daily requirement per person (l)

$$175.2 = 9.6 \times 365 \times 0.05$$

5.1.9 To ensure there is sufficient area to allow a 35-day drought storage, an extra 35 days is to be included:

$$\underline{\mathbf{192}} = 9.6 \times 400 \times 0.05$$

Fig. 3 Potential Rainwater Harvesting tank locations

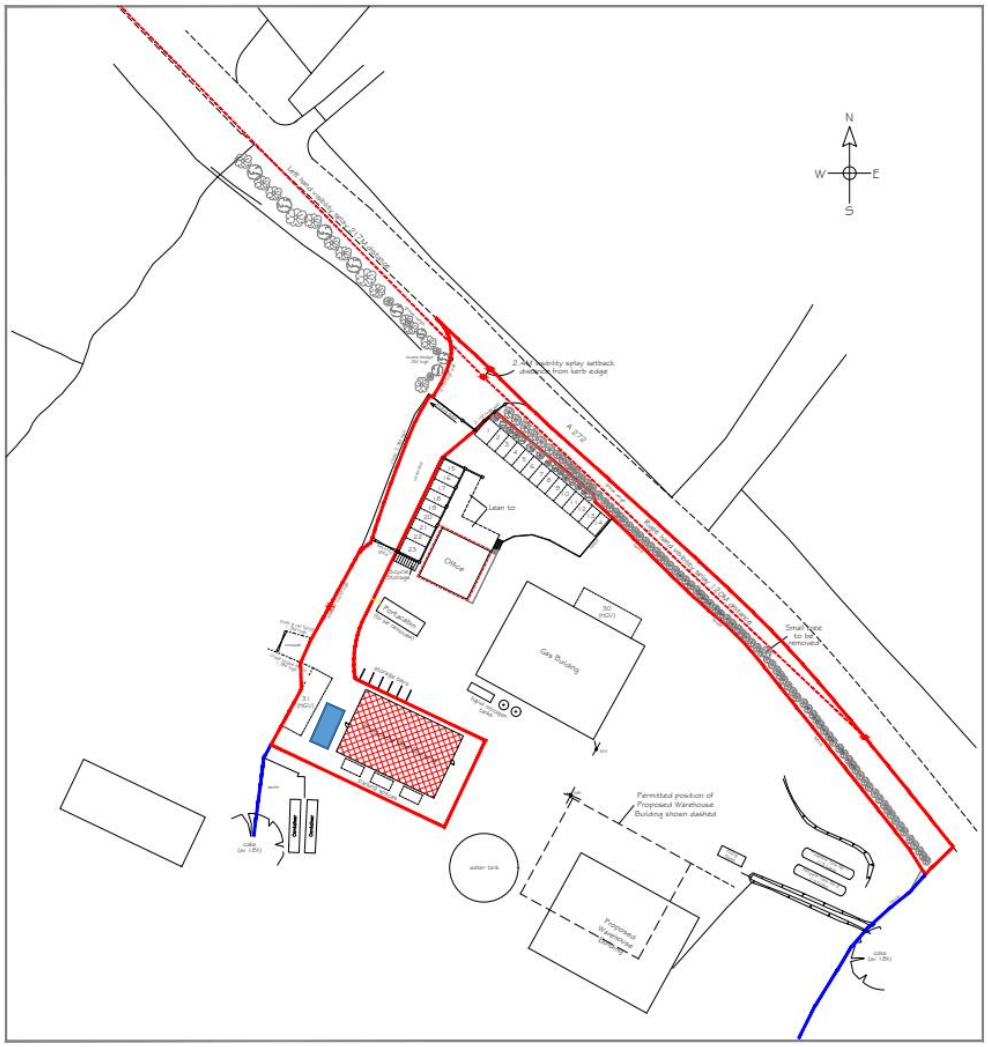

5.1.10 The client is willing to install a single 1,500l rainwater harvesting tank in order to achieve total self-sufficiency within the property. The harvesting tank is to be fitted with the following equipment in order to get the rainwater to a level safe for human consumption.

- Aerator
- Lowara 0.55 kW variable speed booster set
- PREFILT103/4 10" prefilter housing
- CRT10SW-05 5 micro sediment filter
- UV-CS165 ultraviolet steriliser
- WH1MH Whole house water filter
- The reverse osmosis unit – This is fitted as a precaution only

5.1.11 The likely contaminants associated with rainwater harvesting systems and how to treat them are:

- Dust – Sediment Filter
- Bacteria, including Clostridium Prefringers – High dose of UV treatment
- Nitrates – Heavy Metal reduction filter
- Organics – Carbon Filter

5.1.12 It is suggested that the supply is tested once the equipment is initially fitted to ensure effective operation then test the water every 6 months to ensure continued performance. The water treatment equipment will need to be maintained as per the manufacturers guidelines which are all laid out clearly in the equipment quote from Silverline Ltd. They will also send the end user reminders when the equipment needs servicing. The water is to be tested every 6 months, and results kept, there should be a record kept of all maintenance undertaken on the equipment as per the manufacturer's guidelines.

5.1.13 It has been confirmed by Silverline UK Ltd that the only maintenance of the system that is required is to replace filters are certain intervals. It is recommended that the:

- Aerator
- Lowara 0.55 kW variable speed booster set
- PREFILT103/4 10" prefilter housing
- CRT10SW-05 5 micro sediment filter is to be replaced every 6 months, or more frequently if it reduced water flow is experienced.
- UV-CS165 ultraviolet steriliser will need the lamps replacing every 12 months. It is also recommended that the quartz sleeve is removed and cleaned every 12 months to ensure light can get to the water.
- WH1MH Whole house water filter will require having the filter media replaced every 12 months.
- The reverse osmosis unit will require the prefilters replacing every 6 months and the post filter every 12 months. In addition to this, the membrane will need replacing when the water production slows, however, this is dependent on the water used but it is generally every 3-6 years.

5.1.14 Due to the proposed rainwater harvesting tank and filtration system, there is no need to install a water main to the property, however, one should be installed in case of emergency – as such this means the proposed site will not require a Water Neutrality report (based on Natural England's definition below) and will also be water neutral.

"The water neutrality approach applies to all development that uses water from the Sussex North water supply zone and specifically the Pulborough abstractions it is not restricted to new residential dwellings and may include other forms of development that use the public water supply. Whether an application is included would depend on what water supply is chosen. **Only development that uses public water supply from Sussex North water supply zone is included in the Statement. Many of the types of development that use water that the County Council permit do not use public water supply and would therefore not be covered by the Statement.** It is for the local planning authorities including the County Council to identify which types of development they believe may be captured."

5.1.15 Despite the proposed rainwater harvesting tank being below ground, extra precautions can be undertaken by ensuring that the rainwater harvesting tank is to be black in order to stop sunlight reaching the stored water, keeping the temperatures lower and allowing for higher oxygen concentration whilst also preventing algae and bacteria growth. The filters in place are implemented post storage.

5.1.16 The system will be considered as a private water supply and therefore it will be governed by the Private Water Supply Regulations 2016, which is regulated by the local council's Environmental Health officer or Pollution Control Officer. Following completion of the system, a treated water sample will be taken and tested by an independent UKAS accredited lab. The sample will be collected by a suitably qualified person with Drinking Water Inspectorate (DWI) certification for sampling water supplies. The system will be inspected every 6 months and maintenance procedures will be carried out to ensure that the water is treated property.

5.1.17 Inspection and sampling for E.Coli, TVC and Coliforms will be carried out twice yearly. The UV Steriliser will have lamps replaced every year, the filter media in the water filter will be replaced every 2 years and the media within the pH correction unit will be replaced every year.

5.2 Rainwater Harvesting Tank Maintenance Specification

5.2.1 Rainwater Harvesting Tank

In order to maintain the functioning of the rainwater harvesting tanks, the following maintenance requirements should be adhered to:

Operation and maintenance requirements for rainwater harvesting tanks		
Maintenance Schedule	**Required Action**	**Typical Frequency**
Regular Maintenance	Ensure that all inlets and outlets are clear of debris and blockage	Weekly
	Remove debris inlets and outlets	Weekly
	Inspect first flush diverter to ensure it is working correctly and not clogged	Weekly – Clean if necessary
	Clean Filter screens	Monthly – Replace if damaged
	Inspect the tank for sediment build-up and any signs of algae	Monthly
	Inspect roof and gutters and clear of all debris	Every 3 months
	Inspect pump for any signs of wear or damage and test to ensure it is functioning correctly	Every 3 months
	Check bottom of the tank for sediment build-up and clear if necessary	Every 6 months
	Ensure all downpipes are clear and functioning correctly and clear if necessary	Every 6 months
	Test water	Every 6 months
	Thorough tank cleaning – drain tank, scrub interior and rinse	Annually or as required
	Service the pump and filtration system and replace any worn parts	Annually
	Inspect overflow to ensure it is working correctly and clear any obstructions	Annually
Monitoring	Monitor Water levels	Annually
	Inspect for pests e.g mosquitoes and take measures to prevent	As required

5.2.2 Sampling rainwater for analysing, especially for regulatory or compliance purposes, requires adherence to specific regimes and parameters to ensure accuracy and reliability. When undertaken by a Drinking Water Inspectorate (DWI) certified sampler and analysed by a United Kingdom Accreditation Service (UKAS) accredited laboratory, the following regime and parameters should be considered:

- **Frequency of Sampling**:
  - Regular monitoring: Every 6 Months.
  - Event Based Monitoring: After significant rain events, storms or potential contamination incidents.
- **Location of Sampling:**
  - A singular point should be identified as there where the rainwater is to be collected or stored for testing purposes.
- **Timing of sampling:**
  - Post rainfall: To sample stored rainwater within a short period after collection to avoid contamination from storage.
- **Sample Volume:**
  - Typically, 1 – 2 litres of rainwater is collected per sample, ensuring that there is sufficient volume for all required tests.
- **Sampling Methods:**
  - Use clean, sterilised sampling bottles provided by a laboratory.
  - Avoid contamination by wearing gloves and using proper handling techniques.
  - Label samples clearly with time, date, location and any other relevant information.

5.2.3 The specific parameters that are to be analysed depend on the intended use of the rainwater and regulatory requirements. In this case, as the proposed harvesting rainwater is to be used for the washdown machinery which is to be used within the process of making/harvesting honey; the following contaminants are to be tested for:

- **Microbiological**
  - **E. coli**: A critical indicator of fecal contamination. No presence is allowed in potable water.
  - **Coliform bacteria**: These indicate possible contamination. The presence should be minimal or absent.
  - **Enterococci**: These bacteria are another indicator of fecal contamination.
  - **Total Viable Count (TVC)**: This assesses the overall bacterial content, including harmless and pathogenic organisms.
  - **Clostridium perfringens**: An indicator of fecal contamination from sources like sewage.
  - **Pseudomonas aeruginosa**: A specific bacterium that can cause infection, often tested in high-risk areas like healthcare facilities.

- **Chemical**
  - pH, measuring for acidity and alkalinity
  - Turbidity, which is an indicator of suspended particles.
  - Total Dissolved Solids (TDS)
  - Heavy Metals, E.g. Lead, copper, zinc and cadmium.
  - Nutrients, including nitrates, nitrites and ammonia
  - Organic compounds, E.g. Pesticides, herbicides and hydrocarbons

- **Physical Parameters**
  - Colour
  - Odour
  - Temperature, which is measured at the time of sampling

- **Other**
  - Conductivity, indicates if there is a concentration of ions
  - Chloride and Sulfates
  - BOD (Biochemical Oxygen Demand) and COD (Chemical Oxygen Demand) which are indicators of organic pollution

5.2.4 Other specific parameters to be tested for as listed within Schedule 1 of The Private Water Suppies (England) Regulations 2016. These praters are divided into 3 parts:

- Part 1 – Wholesomeness Parameters. Examples include Arsenic, Boron, Copper, Nickel, Nitrate/Nitrite, Pesticides and Selenium
- Part 2 – indicator Parameters (Excluding Radioactive Substances). Examples include Aluminium, Ammonium, Sulphate and Taste.
- Part 3 – Indicator Parameters (Radioactive Substances). Examples Include, Tritium and Total Indicative dose.

5.2.5 During a drought period that surpasses the 35-day protection period, mains water can be fed into a rainwater harvesting tank by utilising an automatic top-up system that will ensure there is a consistent water supply. Here is how it typically works:

- **Float Valves or sensor systems:** The rainwater tank is equipped with a float valve or an electronic sensor system that monitors the water levels. When the water level falls below a certain threshold, it triggers the system to allow mains water to top up the tank.
- **Control Unit**: The system will include a control unit that manages the operation of the float valve or sensors. This unit ensures that the mains water only flows into the tank when necessary, preventing overfilling and unnecessary use of mains water.
- **Mains Water connection**: A pipe connects the mains water supply to the harvesting tank. This pipe is typically fitted with a backflow prevention device to prevent any contamination of the mains water supply.
- **Topping up process:** When the water level in the tank is low, the control unit opens a valve to allow mains water to flow into the tank. Once the desired water level is reached, the valve closes.
- The system is designed with an overflow mechanism to handle excess water if the tank becomes too full, ensuring that any surplus water is safely directed away from the tank.

5.2.6 Ensuring the reliability of the rainwater harvesting system, especially during drought periods, requires having a robust contingency plan. This plan should address the potential failures and outline procedures for investigation and rectifications. Here is a detail plan with steps and timeframes:

- **Monitoring and Early Warning System:**
  - Sensors can be installed to monitor water levels and an alarm system can be set up to alert personnel of any anomalies such as unexpected low water levels or system malfunctions.

- **Routine Maintenance Schedule**
  - Follow the maintenance schedule listed above in section 1.2.1.

- **Contingency Procedures for failure events:**
  - **A:** Minor Issue (E.g. small leaks, sensor malfunctions). Response Timeframe: Within 24 hours.
    - **Immediate Response:** Activate backup water supply if necessary to maintain water availability and notify maintenance personnel.
    - **Inspection and diagnosis:** Inspect the system to identify the issue (e.g. leak location, faulty sensor). Use a diagnostic tool to assess the extent of the problem.
    - **Rectification:** Repair minor leaks with sealant or replace faulty sensors. Reset or recalibrate control unit and sensors.
    - **Verification:** Verify that the issue is resolved, and the system is functioning normally. Log the incident and the actions taken for future reference.

- **B:** Major Issue (E.g. Tank rupture, significant control unit failure). Response Timeframe: Within 2-4 hours.
    - **Immediate Response:** Shut off mains water supply to prevent flooding or further damage. Notify emergency maintenance team.
    - **Inspection and diagnosis:** Conduct a thorough inspection to identify the cause and the extent of the failure
    - **Rectification:** Replace damaged components. Implement temporary solutions if immediate full repair is not possible (e.g. temporary water bowser)
    - **Verification:** Test the system extensively to ensure the repair/replacement is effective. Monitor the system closely for the next 48 hours. Log the incident and the actions taken for future reference.

6 Step 3 – Offsetting remaining water demand

6.1.1 Due to the proposed installation of a rainwater harvesting tank, which will be utilised to achieve total self-sufficiency, including drinking water; there is no requirement to offset the water demand elsewhere as the demand is **0 l/day.**

7 Conclusion

7.1.1 To summarise:

- The proposed development will use on average **3498 l/year or 9.6 l/day** prior to any mitigation techniques.
- Re-using the water through rainwater harvesting tanks can further reduce the water demand down to **0l/day**

8 Appendices

8.1 Appendix A:

Rainwater Harvesting Tank Size Calculator:

COLLECTABLE ROOF AREA (M²)

Main Building	Width:		Length:		Rain Collection Area:	0	m²
Extension one	Width:		Length:		Rain Collection Area:	0	m²
Extension Two	Width:		Length:		Rain Collection Area:	0	m²
Extension Three	Width:		Length:		Rain Collection Area:	0	m²
Or the total roof area, if you already know it:				375	Total area of collectable roof space:	375	m²
Select Your Region		England SE & Central			Average rainfall per year in your region:	64	L
Collectable rainwater per annum in litres - discounted by 20% to account for water loss						**192000**	**L**

USE OF RAINWATER IN THE BUILDING

	people:	bedrooms:	
Number of people or bedrooms in the building -	1	0	
☐ Number of clothes washing cycles per day (*50 litres each*)	0.00 Cycles	0.00	L
☐ Number of toilet flushes per day (*4.42 flushes per person, average 5 litres each*)	0.00 Flushes	0.00	L
Outdoor use in litres, per person per day (*recommended 5 litres per person per day*)	10	10.00	L
Amount of water you require every day		10	L
Amount of water you require every year	**DEMAND**	**3650**	**L**

FINAL FIGURES

How many days drought protection do you need? Typically 21 (18 minimum)	35	
Capacity of water storage in litres required for drought protection	350.00	L
The lesser of YIELD (blue) or DEMAND (green) per annum	3650	L
Therefore, volume of rainwater storage required	**350**	**L**

CONCLUSION

Is there sufficient roof water available:		YES
Recommended tank size from our shallow dig range:	F-Line Range:	1500 LITRE F-LINE TANK

8.2 Appendix B:

Example Rainwater Harvesting Tank Brochure:

Carat Rainwater Harvesting solutions



RAINWATER HARVESTING

WASTEWATER SYSTEMS


RAINWATER RETENTION

DRINKING WATER RESERVOIRS

Edition 2007
Salesfolder C 27-2 Carat EN

Benefits of the Carat System

Flexible, stackable, user-friendly and better for the environment

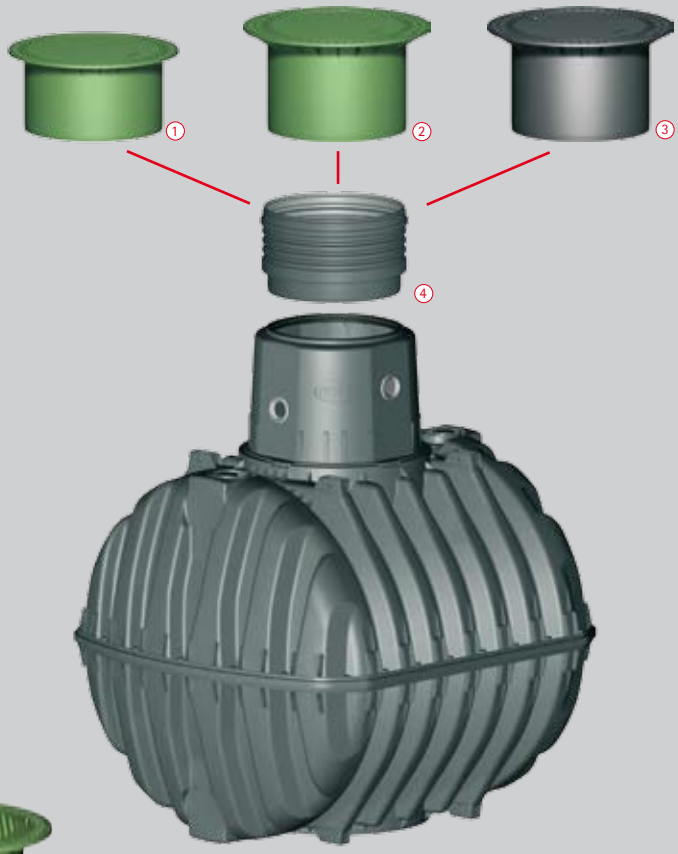

① **Mini telescopic dome shaft with PE lid**
Designed for non-vehicle loading and ideal for garden use, the shaft can be adjusted from 750 - 950 mm and tilted up to 5% to sit flush with the ground level. Includes a PE lid with child safety lock. This item is supplied in green.


② **Maxi telescopic dome shaft with PE lid**
Designed for non-vehicle loading and ideal for the Complete Package (Eco-Plus), the shaft can be adjusted from 750 - 1,050 mm and tilted up to 5% to sit flush with the ground level. Includes PE lid with child safety lock. This item is supplied in green.

③ **Vehicle loading telescopic dome shaft with cast iron lid**
Designed for vehicle loading applications, the tank can be adjusted from 750 -1,050 mm and tilted up to 5% to sit flush with the ground level. Includes child-safe cast iron cover. This item is supplied in dark grey.

④ **Extension**
For use with the telescopic dome shaft to increase the height of the lid from 1,000 - 1,500 mm. Always refer to installation instructions when usig this item.







Logistical advantages of the Carat

The Carat tank consists of two half shells which can be stacked on top of each other, allowing multiple tanks to be stacked on a single pallet for shipping. For example, it is possible to stack five 6,500 ltr Carat tanks, or nine 2,700 ltr Carat tanks on a single pallet. This allows a standard 40 ft. shipping container to house a total tank volume of up to 130,000 ltrs! The tanks unique stacking feature directly reduces transport costs and environmental impact from vehicle emissions, whilst allowing shipments to any destination in the world.

Easy and safe assembly

- The patented quick connection (illustrated in green), allows the Carat tank to be assembled without screws in only few minutes. Disassembly is possible at any time.
- The first-class EPDM material used in the profile sealings (illustrated in yellow), has been laboratory tested to last more than 25 years.
- The centering bolt (illustrated in orange) assures the accurate and easy assembly of the two half shells preventing any leaks

The Carat

The first Rainwater underground tank of its kind!


NEW

Unique manufacturing process

The GRAF Carat underground tank is unlike any other underground tank in the world. It is the largest tank of its kind to be manufactured by injection compression moulding. This technique provides the tank with unbeatable stability and ensures that each component is produced with the highest of accuracy.

Unlike other underground tanks, the wall thickness is equal in all areas of the tank. The production tolerances are kept to a minimum, resulting in a product of the highest quality, which is strong, accurate, reliable and extremely user-friendly.

To manufacture the Carat range, one of the worlds largest injection moulding systems had to be developed.

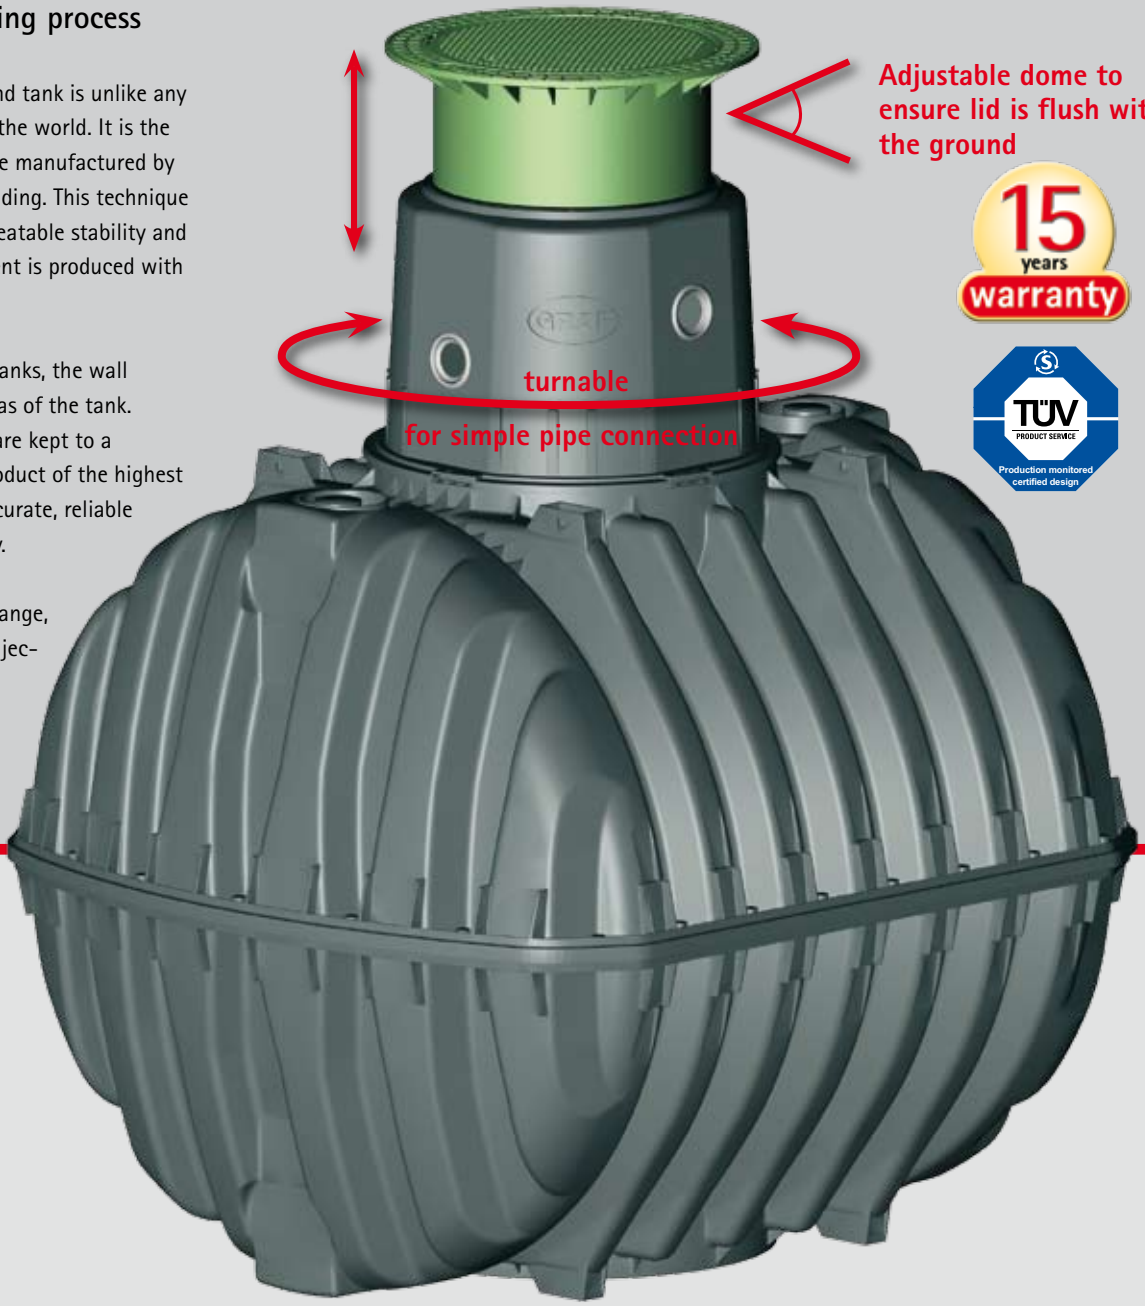

The Carat underground tank is made from Duralen®, a high quality material that is extremely rigid and impact resistant, therefore ideally suited for producing underground tanks. With very low warping characteristics and high stiffness, this material provides high stability and a unique life expectancy. Duralen® can also be easily recycled which reduces waste and environmental impact.

Duralen®

The modular Carat system

Choose your tank size

NEW

Carat, vehicle bearing underground tank

Size 2,700 – 13,000 litres
(700 – 3,400 US-Gallons).
Designed to be used in conjunction with the vehicle loading telescope dome shaft. The access dome is designed in accordance to DIN testing.

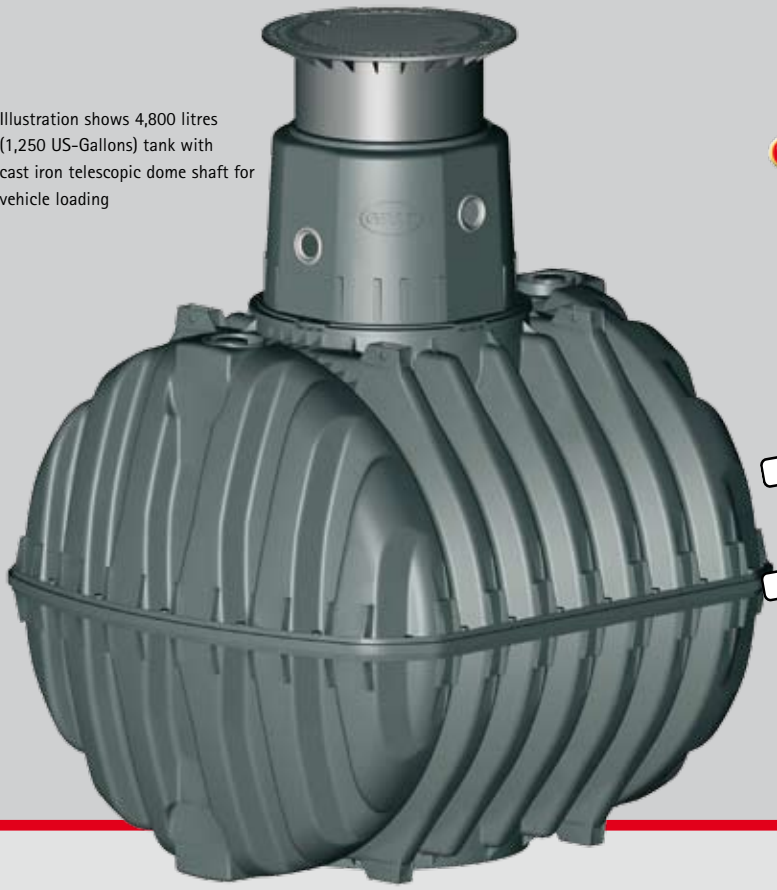


Illustration shows 4,800 litres (1,250 US-Gallons) tank with cast iron telescopic dome shaft for vehicle loading

15 years warranty

EINSTIEGSDOM nach DIN EINSTIEGSDOM

TÜV

European 0870877 Patent

US 5878907 Patent

Volume

Litres	US-Gallons
2,700	700
3,750	1,000
4,800	1,250
6,500	1,700
7,500*	2000*
9,600*	2,500*
13,000*	3,400*

* Set consisting of two Carat underground tanks

Technical data

Dimensions/weight	2,700 L 700 US-Gallons	3,750 L 1000 US-Gallons	4,800 L 1,250 US-Gallons	6,500 L 1,700 US-Gallons	7,500 L* 1,850 US-Gallons	9,600 L* 2,500 US-Gallons	13,000 L* 3,400 US-Gallons
Length	2,080 mm (81.9 inches)	2,280 mm (89.8 inches)	2,280 mm (89.8 inches)	2,390 mm (94.1 inches)	Set consisting of two Carat underground tanks		
Width	1,565 mm (61.6 inches)	1,755 mm (69.1 inches)	1,985 mm (78.1 inches)	2,190 mm (86.2 inches)			
Heigth (including tank dome)	2,010 mm (79.1 inches)	2,200 mm (86.6 inches)	2,430 mm (95.7 inches)	2,710 mm (106.7 inches)			
Height of tank dome	610 mm (24.0 inches)						
Internal Ø tank dome	800 mm (31,5 inches)						
Weight	120 kg (265 lbs.)	150 kg (331 lbs.)	185 kg (408 lbs.)	220 kg (485 lbs.)			
Load							
Max. axle load	Car-bearing				see 3,750 L tank	see 4,800 L tank*	see 6,500 L tank*
Earth covering	800 - 1,200 mm (31.5 - 47.2 inches)						
Groundwater							
Groundwater stable	up to the middle of the tank				see 3,750 L tank	see 4,800 L tank	see 6,500 L tank
Required earth covering	800 mm (31.5 inches)						



For dimensions see 3,750 L tank*



For dimensions see 4,800 L tank*



For dimensions see 6,500 L tank*

Garden Comfort package

The simple garden solution with submersible pump system



Carat Garden Comfort underground tank package

- Simple to install and use
- Use a simple hose connection socket and pressure sensitive pump for automatic water activation, purposely designed for the Gardena® system
- Low visual impact
- Reduces electricity consumption by using a pressure drop activation system, so that electricity is only used when required

Scope of supply

① Carat underground tank
② Mini telescopic dome shaft for pedestrian loading with an adjustable PE lid
③ Filter package 2, consisting of:
- Internal Universal Filter 3
- Inflow stilling system for controlling the water inflow
- Overflow siphon and rodent guard
- Spannfix pipe connection sleeve

④ Garden Comfort pump package, consists of:
- Integra-Duo® 1100 Submersible pump, with protection against dry running and automatic Start / Stop function
- Floating water extraction unit
- Water hose connection box
- 10 m of pressure hose

Volume


Litres	US-Gallons
2,700	700
3,750	1,000
4,800	1,250
6,500	1,700
7,500*	2,000*
9,600*	2,500*
13,000*	3,400*

* Set consisting of two Carat underground tanks

Vehicle loading version available on request

Eco-Plus package

The ideal solution for use in the home and garden

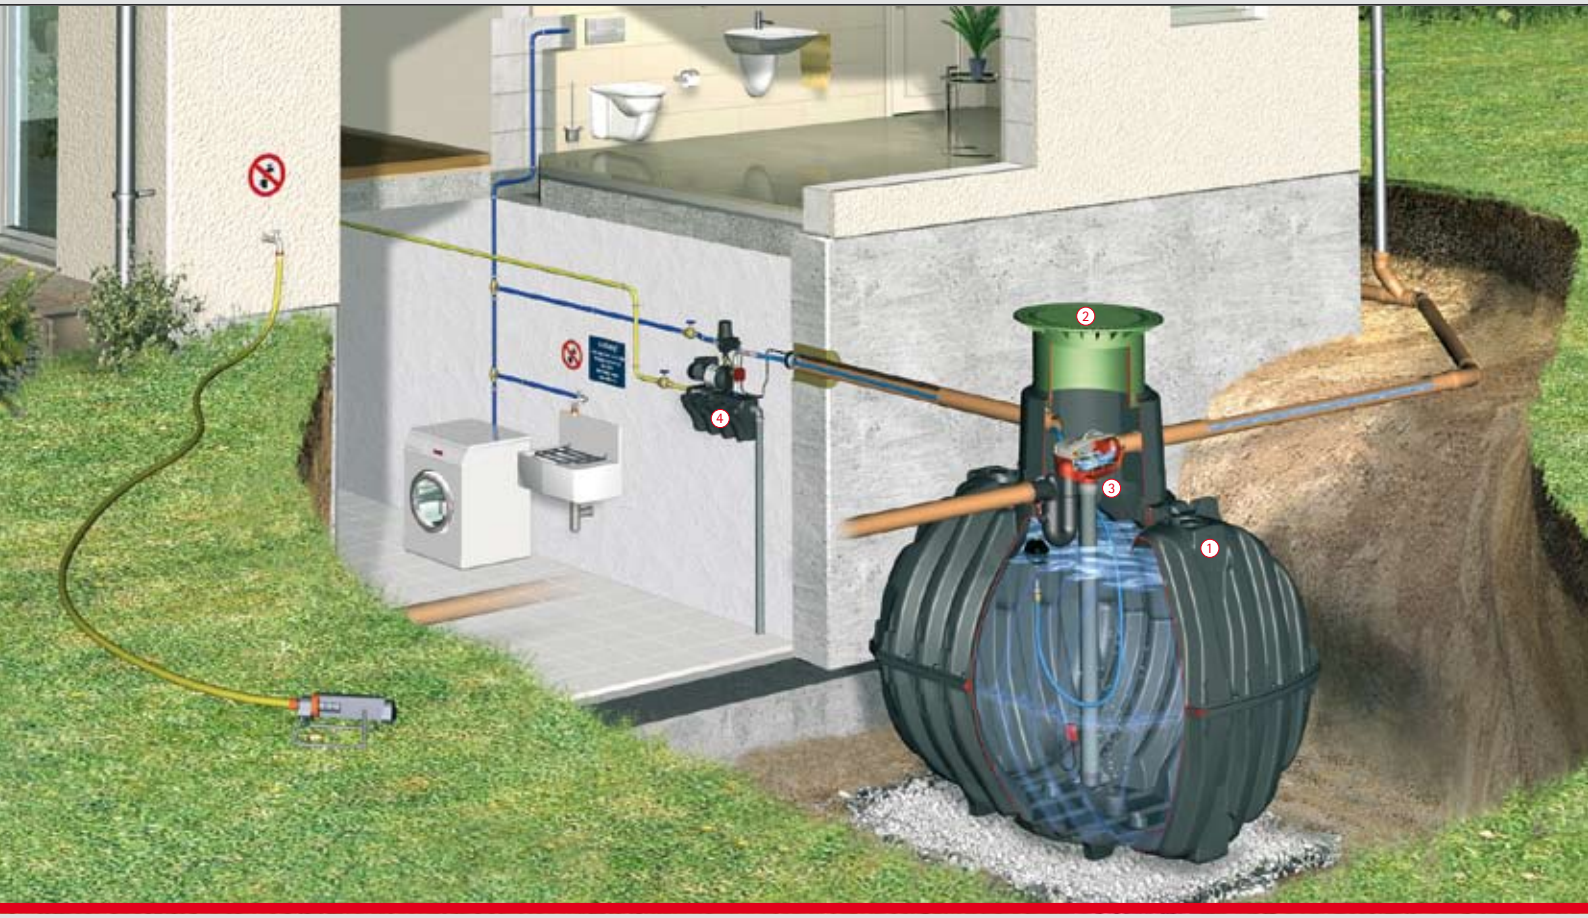

Carat underground tank package Eco Plus

- Economic package solution
- Patented filter technology and in-house pump system with automatic switch-over to mains water supply
- Easy to assemble due to modular components
- Float switch controlled
- Only one cover viewable on the surface

Scope of supply

① Carat underground tank
② Maxi telescopic dome shaft for pedestrian loading with an adjustable PE lid
③ Filter package 3, consisting of:
- Internal Optimax-Pro (self-cleaning) filter
- Inflow stilling system for controlling the water inflow
- Overflow siphon and rodent guard
- Spannfix pipe connection sleeve

④ Eco-Plus pump package consists of:
- Water supply control unit
- Floating water extraction unit
- DN 100 wall duct
- Labelling set
- Suction pipe

Volume

Litres	US-Gallons
3,750	1,000
4,800	1,250
6,500	1,700
7,500*	2,000*
9,600*	2,500*
13,000*	3,400*

*Set consisting of two Carat underground tanks

Vehicle loading version available on request

Internal filter technology

NEW

Efficient cleaning system with high water yield

Optimax Pro, self-cleaning Filter

Advantages

- Provides over 95% water yield
- Utilises patented, high quality filter technology
- Low-maintenance (self-cleaning)
- TÜV-tested to German standards
- Space-saving filter technology inside the tank
- Filter housing can be easily removed without the need for tools
- Transparent lid for filter visibility
- **Can manage roof areas up to 350 m²**
- Standard 100 mm connections
- Self cleaning Opticlean system available as an optional extra
- Low offset height of 165 mm between inlet and outlet




Universal Filter 3

up to 100% water yield

Advantages

- Allows up to 100% water yield
- Ideal for small roof surfaces
- Space-saving filter technology inside the tank
- The Filter housing can be easily removed without the need for tools
- Ideally suited when connecting the tank to a soakaway
- 250 mm offset height between inlet and outlet
- **Can manage roof areas up to 350 m²**
- Standard 100 mm connections
- Emergency overflow system available (optional extra)

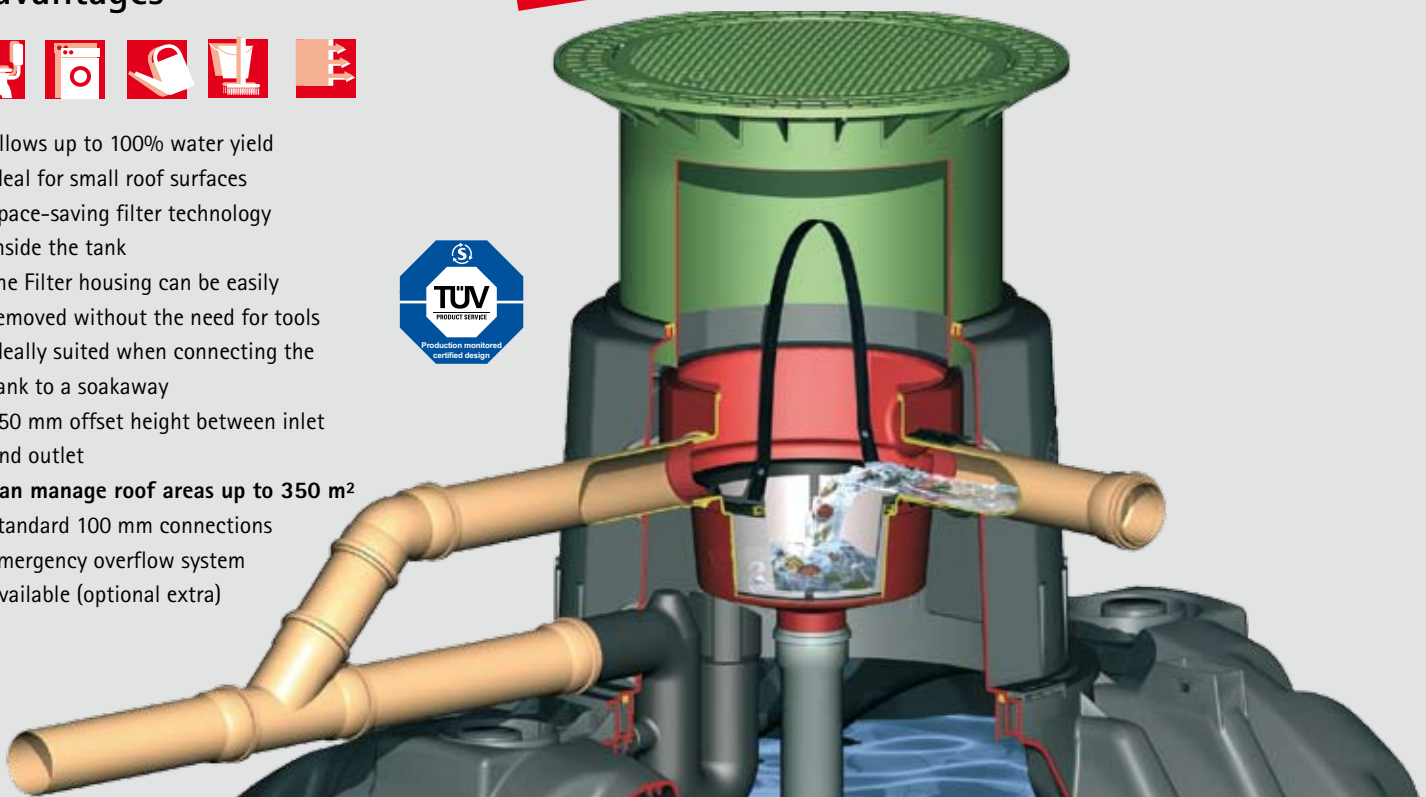

GRAF – Setting the standards in quality



Production site at Teningen (Germany) near Freiburg



Production site at Dachstein (France)

High Quality Manufacturing

GRAF has invested more than € 20 million in a new production site specially set up for the new CARAT range. The new facility has an approximate surface area of 155,000 m² - that equals 31 football pitches - one of the most modern production facilities for plastic products in the world

For over 40 years, Otto Graf GmbH has been offering high-class plastic products to its customers. In 1974 GRAF developed its first pioneering range of rainwater harvesting products. Now GRAF is recognised as Germany's number one rainwater harvesting brand and proudly presents the new premium Carat range of the tanks. A range which is manufactured in one of the most modern and efficent plastic manufacturing facilities in the world!

RAINWATER HARVESTING



STORMWATER MANAGEMENT



AGRICULTURAL CONTAINERS



SEWAGE TREATMENT PLANTS



Warranty clause:
The warranty mentioned in this brochure only refers to the tank in question and not to the accessories. Within the warranty period we grant free replacement of the material. Further benefits are excluded. Pre-condition for warranty benefits are proper handling, assembly and installation according to the mounting guidelines.

N.B. Protect tanks from frost when installed above-ground! In case of groundwater installation, please contact us for further information previous to the purchase!

For all indications of measurements in this brochure we reserve a tolerance of +/- 3%. The useful volume of the tanks may be up to 10% lower than the tank capacity, according to the connecting option.

Technical modifications and further development of the different products are subject to change. Errors excepted.

Otto Graf GmbH
Kunststofferzeugnisse
Carl-Zeiss-Straße 2-6
79331 Teningen / Germany

Phone: +49 (0) 76 41/5 89-0
Fax: +49 (0) 76 41/5 89-50
info@graf-online.de
www.graf-online.de

Over 40 years of quality and innovation

© Otto Graf GmbH, Teningen. Germany
Reproduction – also in extracts – only with written authorisation.