

Related Drawings: DIA Drawing based on
MK Survey: 31246 Phase 2 - North Horsham
SDA: 2898-17-2-DR-0001-SO-P2 Phase 2 855837 Arboricultural Survey 250423
Glanville: 'Mowbray-GLA-RMA2-Ph2-D-C-1001 - 1003 General Arrangement S1 - 3_Bound'
Glanville: 'X-PH2-RMA2-DRAIN - 2025.08.20'

Issue: Drawn by David Jarvis Associates Limited (CROWN COPYRIGHT. ALL RIGHTS RESERVED 2025 LICENCE NUMBER 0100031). This drawing is for Planning purposes only - Do not use this drawing for Construction. The information contained in the drawing should be used as a guide to the final forms and finishes of the landscape scheme. Any revisions to be approved by the Client and Local Authority.

Scaling: Do not scale this drawing. Use given dimensions only.

Setting out: refer to Engineers for information regarding setting out. In the event of discrepancy refer to Engineers in the first instance.

Survey: Original survey provided by the Client.

Services: Where possible these are identified on the drawings but, for the avoidance of doubt all service/utility locations should be considered indicative until identified on site. To ensure those services / utilities shown are current refer to the original survey provider or utilities designer or client for confirmation and further information regarding easements. In the event of new services being installed refer to the appointed Engineer. It is recommended that hazard warning tape 'danger electric cable/danger services' to be installed over all service routes (to remain on site) to current BS guidelines (BS7671).

Lighting: Refer to lighting engineers drawings.

Planting: Plant species are selected and located in line with consideration of the site conditions, NHBC guidelines and discussions with the Local Authority and design team. All plants and planting procedure to conform to the David Jarvis Associates Limited Landscape Specification that will accompany the Construction issue drawings. No species or plant location is to be varied without prior consent of the Landscape Architect.

Biosecurity: All plant stock to be sourced from a supplier certified to be pest and disease free and in accordance with Plant Passport / Animal and Plant Health Agency (APHA) and current DEFRA requirements. Supplier information / certification to be retained for a period of not less than 12 years and must be made available upon request.

Design Levels: Refer to Engineers where design levels are not shown.

Planting Schedule

SPECIMENS

Species	Height	Girth	Specification	No.
Acer campestre	400-450cm	16-18cm	Extra Heavy Standard: 5 brks: 3x: RB: Clear Stem min. 200cm	5
Acer campestre 'Queen Elizabeth'	400-450cm	16-18cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	6
Acer platanoides 'Emerald Queen'	450-500cm	18-20cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	28
Acer platanoides 'Globosum'	min. 400cm	16-18cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	14
Betula albosinensis 'Fascination'	400-450cm	16-18cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	8
Betula utilis jacquemontii	450-500cm	18-20cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	18
Carpinus betulus	450-500cm	18-20cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	23
Crataegus monogyna	400-450cm	16-18cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	12
Liquidambar styraciflua 'Worplesdon'	450-500cm	18-20cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	5
Malus 'Evereste'	400-450cm	16-18cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	14
Malus 'Rudolph'	400-450cm	16-18cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	9
Prunus 'Acoladale'	400-450cm	16-18cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	11
Prunus avium 'Plena'	400-450cm	16-18cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	2
Pyrus calleryana 'Chanticleer'	450-500cm	18-20cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	7
Quercus robur	400-450cm	16-18cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	3
Sorbus commixta	400-450cm	16-18cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	4
Sorbus commixta 'Embley'	400-450cm	16-18cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	4
Tilia cordata	450-500cm	18-20cm	Extra Heavy Standard: 3x: RB: Clear Stem min. 200cm	37

WOODLAND MIX

Species	Height	Pot Size	Specification	Density	No.
Acer campestre	175-200cm		Feather :2x :5 brks :B	1/m ²	58
Betula pendula	175-200cm		Feather :2x :5 brks :B	1/m ²	41
Cornus sanguinea	40-60cm		Br:1+1 :2 brks :BR	1/m ²	87
Corylus avellana	40-60cm		Br :1+1 :BR	1/m ²	144
Crataegus monogyna	175-200cm		Feather :2x :5 brks :B	1/m ²	29
Euonymus europaeus	40-60cm		Br :1+1 :3 brks :BR	1/m ²	58
Ilex aquifolium	40-60cm	2L	LeLa:1+1 :2 brks :C	1/m ²	12
Prunus spinosa	40-60cm		T :1+1 :1/3 brks :BR	1/m ²	41
Quercus robur	40-60cm		T :1+1 :BR	1/m ²	41
Rosa canina	40-60cm		Br :1+1 :2 brks :BR	1/m ²	12
Viburnum opulus	40-60cm		Br :1+1 :2 brks :BR	1/m ²	58

HEDGING

Species	Height	Specification	Density	No.
Corylus avellana	60-80cm	1+2: Transplant - seed raised: Branched: 3 brks: B	0.5Ctr Triple Staggered at 0.5m offset	2894
Crataegus monogyna	60-80cm	1+1: Transplant - seed raised: B	0.5Ctr Triple Staggered at 0.5m offset	7214
Prunus spinosa	60-80cm	1+1: Transplant - seed raised: Branched: 2 brks: B	0.5Ctr Triple Staggered at 0.5m offset	2894
Viburnum lantana	60-80cm	1+2: Transplant - seed raised: Branched: 3 brks: B	0.5Ctr Triple Staggered at 0.5m offset	1454

GENERAL PLANTING

Species	Height	Pot Size	Specification	Density	No.
Caltha palustris		50cc min.	Plug: Established Root min. 2-3 Months: Sept to April planting: British Native-origin: C		411
Carex riparia		50cc min.	Plug: Established Root min. 2-3 Months: Sept to April planting: British Native-origin: C		411
Iris pseudacorus			Clump: 3 buds: min. 1 Year: British Native-origin: B		411
Lythrum salicaria			Clump: 3 buds: min. 1 Year: British Native-origin: B		411
Mahonia aquifolium 'Apollo'	20-30cm	2L	2 brks	8/m ²	546
Mentha aquatica		50cc min.	Plug: Established Root min. 2-3 Months: Sept to April planting: British Native-origin: C		411
Salvia officinalis 'Icterina'		2L	Full Pot	8/m ²	546
Veronica rakiensis		2L	3 brks	8/m ²	728

BULBS

Species	Specification	Density	No.
Crocus chrysanthus 'Zwanenburg Bronze'	Grade 5/7	0.3Ctr	2636
Galanthus nivalis	Grade 5/6:In the Green: B	0.3Ctr	2636
Narcissus 'February Gold'	10/12	0.3Ctr	192
Narcissus 'Golden Harvest'	10/12	0.3Ctr	192
Narcissus pseudonarcissus	Grade 6/+ Topsize	0.3Ctr	2287

PLANTING NOTES



All plants;
Tree and plant stock to be procured as per the Landscape Specification. All plant materials to be planted at the density and quantities shown.

Trees: Tree planting principles should be followed as set out in drawings 2898-5-5-VEG-0001-0003 Typical Tree Planting Details.

Hedgehog: Hedge planting to be supported using canes and protected using Green Tech Tree-bio Biodegradable Spiral Guard, 60cmx38mm, or similar approved. Bark mulch to be overlaid across planting area 75mm deep extending to 0.5m beyond planting.

Root barriers: To be placed where trees are located within 5m from hard surfaces, drainage and services.

Plant stock for use in the ancient woodland buffer planting is to be locally sourced as per Natural England guidance

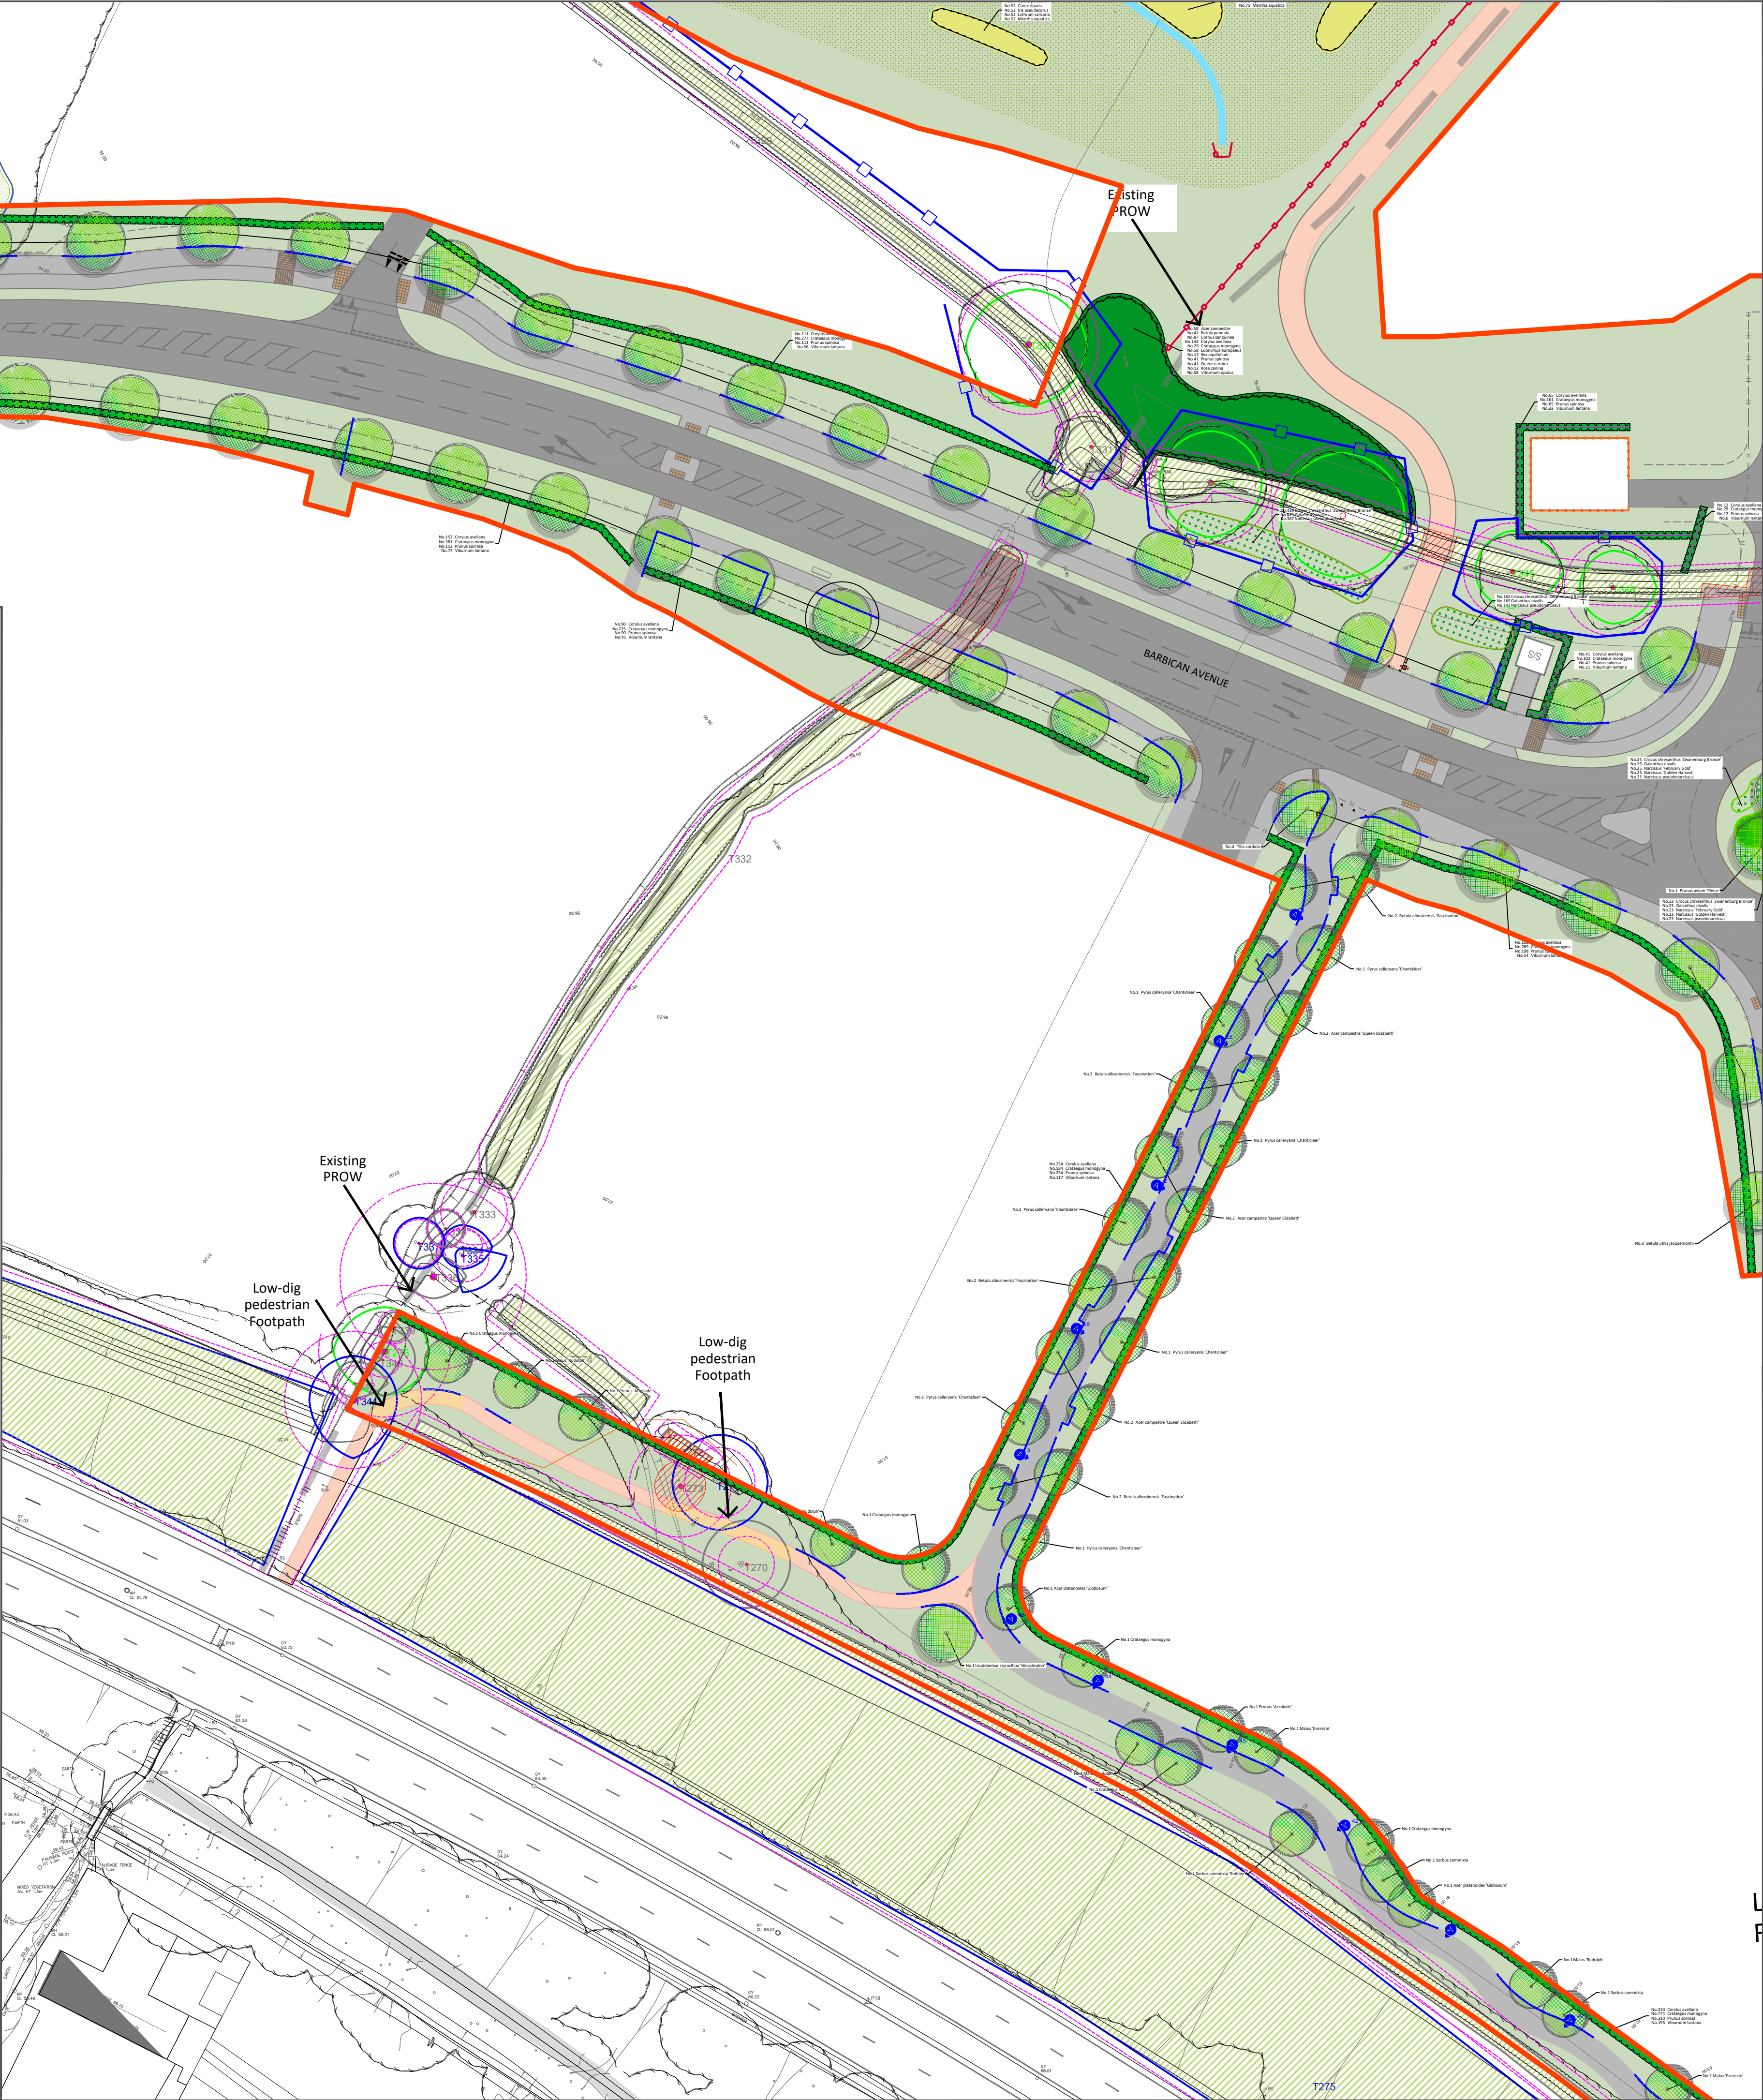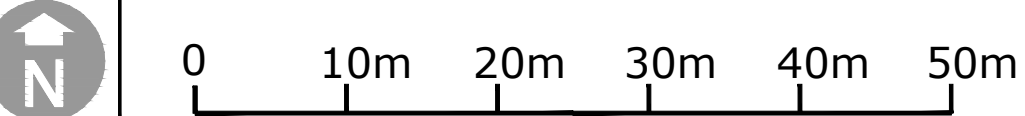

Key

	APPLICATION BOUNDARY
	EXISTING TREES AND VEGETATION RETAINED TREES AND HEDGEROWS TO BE REVIEWED BY ARBORICULTURAL CONSULTANT
	EXISTING TREES AND VEGETATION TO BE REMOVED TREES AND HEDGEROWS TO BE REVIEWED BY ARBORICULTURAL CONSULTANT
	ROOT PROTECTION AREA (RPA) WHERE HARD SURFACES ARE PROPOSED WITHIN AN RPA MITIGATION SYSTEMS MAY BE REQUIRED SUCH AS A CELLULAR CONFINEMENT SYSTEM. REFER TO ARBORICULTURAL CONSULTANT'S REPORT
	PROPOSED TREES
	MIXED SHRUB PLANTING
	AMENITY GRASS
	BULB PLANTING
	WETLAND GRASS - BASINS
	WOODLAND PLANTING
	HEDGE PLANTING
	MARGINAL AQUATIC PLANTING
	TARMAC - CARRIAGEWAY REFER TO GLANVILLE DRAWING Mowbray-GLA-RMA2-Ph2-D-C-1001 - 1003 General Arrangement S1 - 3_Bound
	TARMAC - FOOTPATH/CYCLEWAY REFER TO GLANVILLE DRAWING Mowbray-GLA-RMA2-Ph2-D-C-1001 - 1003 General Arrangement S1 - 3_Bound
	TIMBER POST AND RAIL FENCE REFER TO DIA DETAIL 2898-5-5-BND-0007
	ESTATE RAILING REFER TO DIA DETAIL 2898-5-5-BND-0004
	ANTI-CLIMB FENCE REFER TO DIA DETAIL 2898-5-5-BND-0001
	SELF BINDING GRAVEL - TIMBER OR CONCRETE EDGE CORNWELL SELF BINDING GRAVEL - GOLDEN AMBER BY GRUNDFOS. REFER TO DIA DETAIL 2898-5-5-SUR-0002
	TIMBER BOLLARD, LITTER BIN AND DOG BIN REFER TO DIA DETAILS 2898-5-5-FRN-0005, 2898-5-5-FRN-0007 AND 2898-5-5-FRN-0004
	BENCH CHECKSHIRT TIMBER SEAT BY FURNITURES ON BREEDON GRAVEL BASE REFER TO DIA DETAIL 2898-5-5-FRN-0001
	LOW FLOW CHANNEL REFER TO DIA DETAILS 2898-5-5-FRN-0005, 2898-5-5-FRN-0007 AND 2898-5-5-FRN-0004
	ROOT BARRIER GREEN TECH ROOT BARRIER 300, 600MM DEPTH, OR SIMILAR APPROVED
	TREE PROTECTION FENCING

Drawing Revision

Rev.	Date	Description	Drawn	Checked
P1	20/08/2025	First Issue	AnB	PG
P2	03/09/2025	Tree protection fencing added	PG	PG
P3	09/09/2025	Amendments to fence and furniture layout	AnB	PG
P4	11/09/2025	Red line boundary updated; tree protection fencing adjusted	AnB	PG

Status

PLANNING

DAVID JARVIS ASSOCIATES

DAVID JARVIS ASSOCIATES LIMITED
1 Tennyson Street Swindon Wiltshire SN1 5DT
t: 01793 612173
e: mail@davidjarvis.biz
w: www.davidjarvis.biz

Client

LEGAL AND GENERAL (STRATEGIC LAND NORTH HORSHAM) LIMITED

Project

LAND NORTH OF HORSHAM (RMA2) - EMPLOYMENT ROAD

Drawing Title

**PLANTING PROPOSALS
(1 of 6)**

Scale 1:500	Sheet Size A1	Date Plotted 11/09/2025
Client Ref. -	Drawing Ref. 2898-5-2-20	Drawing No. DR-0002
		Version S5-P4