



THE CONTENTS OF THIS PLAN INCLUDING THE PRINTED NOTES ARE COPYRIGHT AND REPRODUCTION IN WHOLE OR PART IS NOT PERMITTED WITHOUT PRIOR CONSENT OF MERVE TAY ARCHITECTURE IN WRITING.

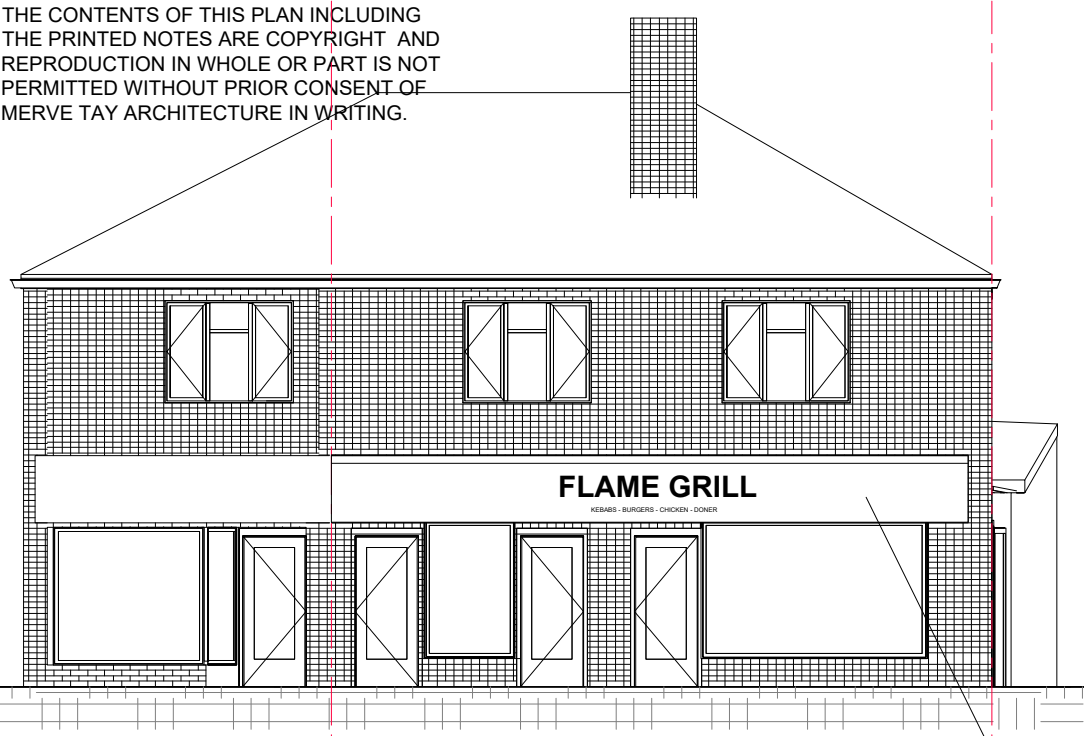


Proposed Front Elevation (East)

Fascia signage shown for reference only and subject to separate advertisement consent application Ref. DC/25/1653.


The existing fascia and its illumination arrangement will remain unchanged. The lettering and logos are non-illuminated, with the existing concealed linear LED lighting positioned along the underside of the fascia and directed downwards.

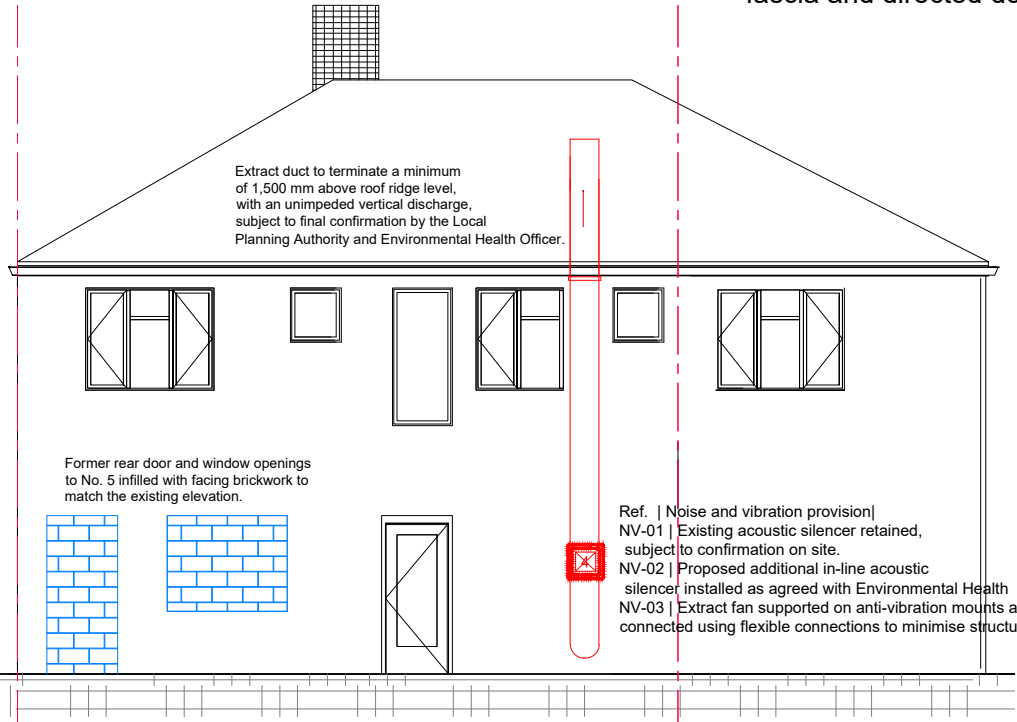

Proposed Rear Elevation

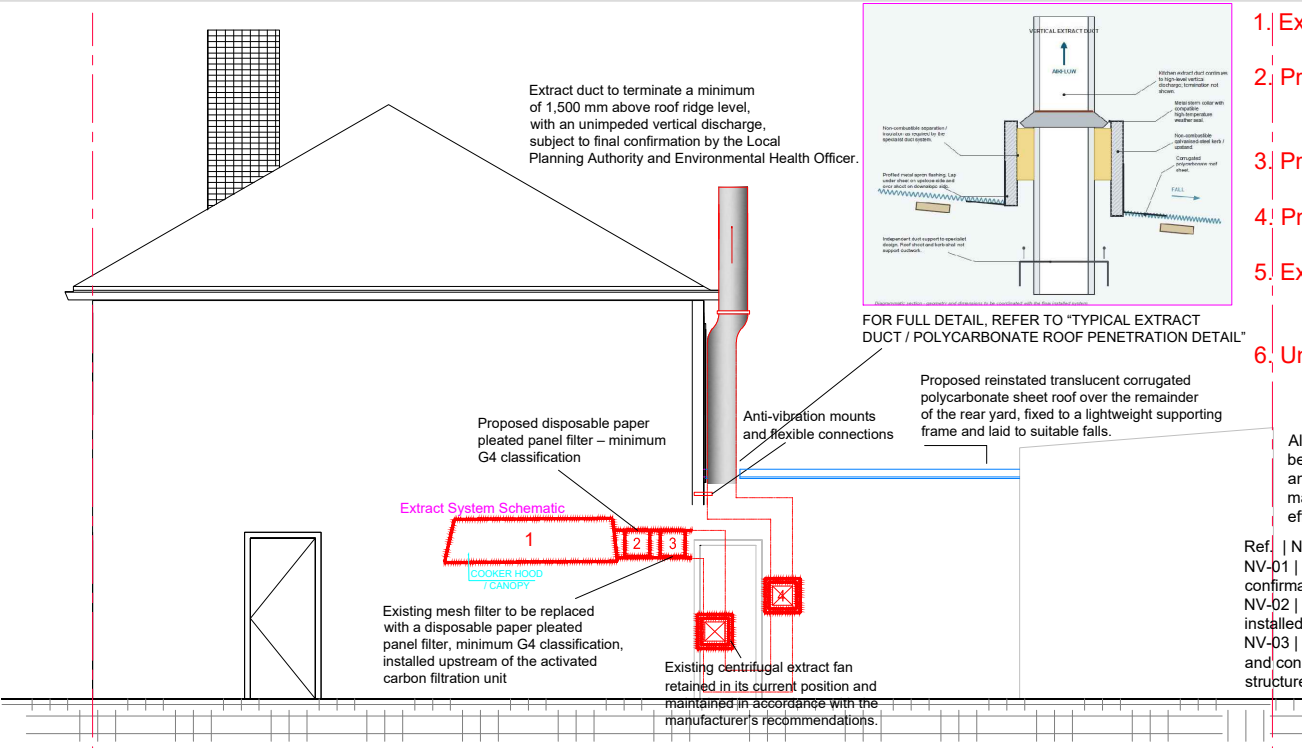

Proposed Side Elevation (North)

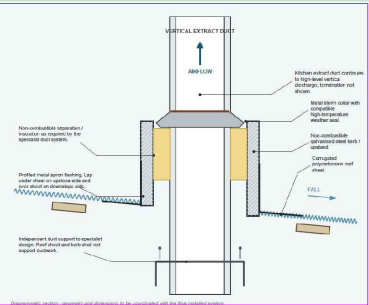

FOR FULL DETAIL, REFER TO "TYPICAL EXTRACT DUCT / POLYCARBONATE ROOF PENETRATION DETAIL"

1. Existing baffle-type grease filters within extract canopy
2. Proposed disposable pleated panel filter – minimum ISO G4 classification
3. Proposed activated carbon filtration unit for odour control
4. Proposed additional in-line acoustic silencer
5. Extract duct extended to the approved high-level termination point
6. Unimpeded vertical discharge with rain protection; no cowl or directional cap proposed

All filters and extraction equipment shall be regularly inspected, cleaned, maintained and replaced in accordance with the manufacturers' recommendations to ensure effective odour control.

Ref. | Noise and vibration provision|
NV-01 | Existing acoustic silencer retained, subject to confirmation on site.
NV-02 | Proposed additional in-line acoustic silencer installed as agreed with Environmental Health
NV-03 | Extract fan supported on anti-vibration mounts and connected using flexible connections to minimise structure-borne vibration.

Extract airflow sequence: existing canopy baffle filters → proposed minimum ISO G4 pleated panel filter → proposed activated carbon filter bank → existing centrifugal extract fan → proposed additional acoustic silencer → high-level unimpeded vertical discharge.

Fascia signage shown for reference only and subject to separate advertisement consent application Ref. DC/25/1653.

Change of use of No. 5 from retail (Use Class E) and its amalgamation with the existing authorised hot food takeaway at No. 3, with No. 5 used for ancillary food preparation, customer waiting, ordering and collection. No cooking or extraction equipment is proposed within No. 5.

Merve Tay Architecture&Design
+447515 884719
info@mervetay.com

Address	3-5 West St, Storrington, Pulborough RH20 4DY		
Project	Change of use of No. 5		
Drawing Title	Proposed Elevations		
Project Number	266	Date	12/08/2025
Drawn by	Merve Tay		
Scale	1:100@A3	Revision	Rev
Drawing No	P-C03		