PROMETHEAN
PLANNING

The Old Piggery,
Fryern Road,
Storrington
RH20 4BJ

Conversion of agricultural building to a single dwelling

WATER NEUTRALITY REPORT

and

WATER MANAGEMENT PLAN

21st August 2025

Prepared by Ben Kirk MSc

The Proposal

The proposal is for the Conversion of agricultural building to a single dwelling.

Water neutrality

The application site falls within the Sussex North Water Supply Zone, where increased demand for mains-water would exacerbate demand for the continued use/scale of public groundwater abstractions at Hardham Water Works contributing to associated adverse effect upon the integrity of the Arun Valley SAC, SPA and Ramsar sites.

Therefore, based on the evidence it is reasonable to conclude that, without mitigation, the proposal would result in an adverse effect on the integrity of the Arun Valley sites, either alone or in combination with other plans and projects.

The following sets out the water demand from the proposal and how this will be reduced by way of efficient fittings on the development and how this water demand will be met by way of a rainwater harvesting system which would provide for all of the sites water thus removing any potential for impact on the integrity of the Arun Valley SAC, SPA and Ramsar sites.

Baseline Water Consumption and Water reduction measures

The following summarises the flow rates for the fittings in the proposed units .

These have been achieved by the use of efficient fixtures and fittings in order to reduce the water demand.

- WC- 4/2 litre dual flush
- Kitchen sink tap with a flow rate of 4 litre per minute
- Shower with a flow rate of 8 litre per minute
- Bathroom basin taps with a flow rate of 4 litre per minute
- Dishwasher – 0.99 litres per place setting
- Washing machine – 8.5 litres / kg dry load

Using the above figures, the water usage can be calculated using a Part G water calculator as shown in Appendix 1

This demonstrates a water demand of 94.2 litres / person / day which includes an allowance of 5 litres per person per day for external water usage.

Census data has been used to estimate the average number of occupants (as per HDC guidance)

This sets out that the following occupancy rates should be used.

One-bedroom dwellings: 1.32 occupants
Two-bedroom dwellings: 1.88 occupants
Three-bedroom dwellings: 2.47 occupants
Four-bedroom dwellings: 2.86 occupants
Five-bedroom dwellings: 3.09 occupants.

The unit will be three bedroom and so a figure of 2.47 people should be used.

Meeting the water demand by way of Rainwater harvesting

Rainwater Harvesting is proposed to be installed to meet 100% of the water demand for both potable and non-potable water.

British Standard 16941-1:2018 (previously BS 8515:2009+A1:2013) provides guidance on rainwater harvesting.

The British Standard gives recommendations on the design, installation, testing and maintenance of rainwater harvesting systems and the methods of calculating the size of rainwater harvesting tanks.

The intermediate approach has been used to calculate the storage capacity.

This is based on a total available roof area on the site of 168m2

The calculations for water demand and available yield are shown in Appendix 2

These calculations show the size of the rainwater harvesting system that would be required to meet the water demand for the development for a period of 35 days to ensure drought tolerance capacity

The calculations in Appendix 2 conclude that:

- The water demand for the development and allowing for 35 days of drought tolerance would be 8,153 litres

- The total available rainwater yield based on available roof area and allowing for 35 days of drought tolerance would be 8,725 litres

It is clear that the available rainwater yield is in excess of the demand and so the development can be entirely supplied by way of rainwater harvesting subject to the quality of the supply being maintained (see below)

The building would therefore require a rainwater harvesting tank with a minimum storage capacity of 8,153 litres in order to ensure sufficient capacity to meet the demand of the development.

It is therefore proposed to install 1 x 10,000-litre potable rainwater harvesting tank. Details of the tank are shown in Appendix 4.

Ensuring certainty of the supply to meet the demand

Based on the above figures it is clear that the rainwater harvesting system will meet the water demand for the site and will meet the required 35 days of storage, which will provide sufficient supply during periods of drought.

This will ensure that sufficient water is available at all times, even during extended periods of drought.

Filtration Measures proposed to ensure water is potable

The rainwater harvesting supply will undergo a process of filtration to create potable water. The system will incorporate suitable treatment in accordance with drinking water regulations, to ensure that the water quality is suitable for its intended use.

This will be delivered via a Ozo-Pure 30 rainwater to drinking water treatment console installed in to the building, full details of which can be found in Appendix 5

The Ozo-Pure 30 uses H2Ozone patented technology to provide a chemical-free purification solution for all water sources to independently verified drinking water standards.

The units come with a service and maintenance agreement which the applicant will enter in to.

Further details of the unit can be found here https://www.freeflush.co.uk/products/ozo-pure-rainwater-to-drinking-water-treatment-console?variant=39838001692759

The Ozo-Pure 30 console would be installed by a specialist installer according to manufacturer's recommendations. Water usage would be recorded by water meter.

Maintenance and Management Plan

Responsibilities.

The following sets out the long-term management and maintenance of the rainwater harvesting systems at the proposed development.

It is vital that the occupants have a robust inspection and maintenance plan for the lifetime of the development to ensure the quality and yield of the water being supplied ensuring that the proposed development will remain water neutral.

Industry guidance, such as that provided in BS EN 16941-1:2018 and manufacturers guidance has been used to provide the maintenance and management plan.

As the system will be considered as a private water supply it will be governed by the Water Supply (water Quality) Regulations 2016. These are regulated by the local council's Environmental Health Officer or Pollution Control Officer.

The regulations in England and Wales do not require monitoring to be undertaken where the water supply is to a single domestic dwelling unless concerns are raised by the owner or occupier.

However, it is understood that the Local Authority have taken the decision to regulate all of these private supplies on a local basis. The applicant is therefore happy to commit to provide the testing results and documentation to the local authority within a period of 14 days of request in writing.

The Drinking Water Inspectorate's Private Water Supply regulations sets out that it is the responsibility of the homeowner to ensure that all necessary maintenance activities are carried out in a timely manner.

The occupants of the property should be aware of the system but it is expected that the occupants will enter in to a maintenance agreement with a company that has specialist knowledge of the systems. It is expected that as a minimum, the maintenance work will be carried out by a competent person who must have prior knowledge of the rainwater harvesting systems onsite.

Treatment of water supply.

The system will undergo a number of levels of treatment in order to ensure it complies with the Water Supply (Water Quality) Regulations 2016

Preliminary treatment such as leaf guards on gutters and a water filter will be provided prior to the water reaching the storage tank.

A first flush diverter will be included to divert particles contained in rainwater away from the tank and to a suitable drain. These measures will prevent coarse solids and organic matter from entering the storage tank.

These measures will prevent coarse solids and organic matter from entering the storage tank.

Fine particles will be separated either by sedimentation or flotation to the water surface.

A calmed inlet will be incorporated in the tank to prevent the sediment being disturbed by the inflow of water. Removal of the sediment will be carried out on a 6 monthly basis.

A floating pump will be used to extract the water from the tank, set above the sediment level

The system will then incorporate suitable treatment in accordance with drinking water regulations, to ensure that the water quality is suitable for its intended use.

This will be achieved by the Ozo-Pure 30 system which will installed in to the building and will provide a chemical-free purification solution for all water sources to independently verified drinking water standards.

Because Ozone Technology is a chemical-free process (no chlorine or fluoride is used), no carcinogenic THMs (Trihalomethanes) are created, guaranteeing a 24/7 365-day sustainable supply of pure, clean, fresh water.

Maintenance of the system

The units come with a service and maintenance agreement which the applicant will enter in to.

BS EN 16941-1:2018 does not require frequent testing to be undertaken but states that observations for water quality should be made during maintenance visits and testing should be carried out where the system is not operating satisfactorily.

As the water is to be potable however and in order to ensure the water remains safe to drink, samples will be undertaken by a DWI certified sampler on an annual basis as part of the annual maintenance contract and will be tested at a UKAS accredited laboratory.

Annual water samples will be tested for the following in accordance with BS EN 16941-1:2018:

- pH
- TOC
- Colour
- Turbidity
- Suspended solids
- Conductivity
- Cl, NO3, SO4
- Na, Ca, Mg, Al
- Ni, Cr, Cu, Pb
- Total & Dissolved Fe
- Mn
- Ammonium/Ammonia
- TVC, E.Coli, Coliforms, Pseudomonas aeruginosa, Enterococci, Clostridium perfringens

These samples will be tested to ensure the parameters set out in the Water Supply (Water Quality) Regulations 2016 are met and maintained.

The annual maintenance inspection should include:

- Inspection and cleaning of the tank
- Cleaning of gutters
- Inspection of filters
- Inspection of pumps
- Inspection of overflow areas
- Testing of the water supply

The results of the annual maintenance inspection and all sample testing should be recorded and should be kept with the property for the lifetime of the development.

Filters should be changed on a 3 monthly basis. The First Flush diverter will be inspected, flushed out and fully cleaned out every 3 months.

Contingency measures for system issues.

If a water sample failed, the point of use would be investigated by a British Water certified engineer and would be reported to the supplier of the Ozo-Pure 30 unit so the issue could be resolved. This would be reported to the LPA.

Drain down points for each water pipeline will be installed for ease of cleaning and sterilization.

The Service contract will allow for attendance to address re-activation of the system after it has been out of use due to lack of rainfall/use.

Should the system fail, it would be investigated and repaired by a British Water certified engineer. This would likely mean that the system could be out of action for 7-10 days.

In these circumstances the occupants would seek a bulk supply of water sourced from outside the Arun Valley sites' catchment area to ensure sufficient water is available for all potable and non potable purposes.

It is not unreasonable to assume that occupants could seek a supply of water for the short period if the system were to fail and whilst it is repaired and as concluded by the inspector this could be secured by a suitably worded condition.

The British Water certified engineer will undertake the completion of a Regulation 6 risk assessment by a suitably competent person (as required by the Private Water Supply (England) Regulations 2016) prior to the water supply being put into use and this will be provided to the Environmental Health Officer at the LPA prior to occupation of the unit.

The above is considered to be a detailed plan which provides sufficient information to ensure the supply is safely maintained and that the development remains water neutral.

Conclusion

This report confirms that the rainwater harvesting system proposed to be installed on the site would provide a certain sufficient yield to meet the water demands of the site.

The filtration system provides guaranteed water quality and there would be robust management and maintenance contracts in place to ensure this remains the case for the lifetime of the development.

Robust reporting by suitably qualified engineers and testing at recognised laboratories would provide certainty as to the quality of the water.

This strategy will minimise the impact of the new development on the Sussex North Water Supply Zone. The Water Usage Strategy confirms the proposal will be water neutral once complete and therefore satisfies Natural England's requirements.

As such, there is no reasonable scientific doubt that the proposed development would be water neutral. The proposal would not result in an increase in water abstraction in the River Arun and Western Streams catchment of the Sussex North WRZ.

Therefore, it would not adversely affect the integrity of the Arun Valley SAC, SPA and Ramsar sites. Consequently, it would be consistent with Policy 31 of the HDPF which seek to protect the hierarchy of designated sites and habitats.

APPENDIX 1
Part G Water calculations

Water Calculator | WC | Taps (Other) | Taps (Kitchen/Utility) | Baths | Dishwashers | Washing Machines | Showers | H2O softeners | Greywater | Rainwater

Installation Type	Unit of Measure	Capacity/Flow rate (1)	Use Factor (2)	Fixed use (litres/person/day) (3)	Litres/person/day = [(1)x(2)] + (3) (4)
WC (single flush)	Flush Volume (litres)		4.42	0.00	0
WC (dual flush)	Full flush Volume (litres)	4	1.46	0.00	5.84
	Part flush Volume (litres)	2	2.96	0.00	5.92
WC (multiple fittings)	Average effective flushing Volume (litres)		4.42	0.00	0
Taps (excluding kitchen/utility room taps)	Flow rate (litres/min)	4.00	1.58	1.58	7.90
Bath (where shower also present)	Capacity to overflow(litres)		0.11	0.00	0
Shower (where bath also present)	Flow Rate(litres / minute)		4.37	0.00	0
Bath Only	Capacity to overflow(litres)		0.50	0.00	0
Shower Only	Flow Rate (litres/minute)	8.00	5.60	0.00	44.80
Kitchen/Utility room sink taps	Flow rate (litres/minute)	4.00	0.44	10.36	12.12
Washing Machine	(Litres/kg dry load)	8.50	2.1	0.00	17.85
Dishwasher	(Litres/place setting)	0.99	3.6	0.00	3.56
Waste disposal unit	(Litres/use)	☐ Present	3.08	0.00	0
Water Softener	(Litres/person/day)		1.00	0.00	0
	(5)	**Total Calculated use (litres/person/day) =SUM(column 4)**			97.99
	(6)	Contribution from greywater (litres/person/day)			0
	(7)	Contribution from rainwater (litres/person/day)			0
	(8)	Normalisation factor			0.91
	(9)	Total internal water consumption = [(5)-(6)-(7)]x(8) (litres/person/day)			89.17
	(10)	External water use			5.0
	(11)	**Total water consumption (Building Regulation 17.K) =(9)+(10)(litres/person/day)**			94.2

Click here to fill in details before printing:

Appendix 2

Water demand per unit and total available yield for rainwater harvesting calculations.

Water Demand per unit	
Dn = Pd x n x 365 x (365/number of days of drought storage required)	
Dn is the water demand	
Pd is the daily water requirement per person (litres)	
n is the number of persons	
35 Day water demand calculations calculated at 9.6% (35/365) of the Annual water demand (litres) to account for 35 days of storage for periods of drought	
Pd (daily water requirement per person (litres))	94.2
n (number of persons)	2.47
Dn (water demand) in litres	8153

Available Yield (TOTAL)	
Yr = A x e x AAR x h x (365/number of days of drought storage required)	
Yr is the rainwater yield	
A is the collection area (m2)	
e is the yield coefficient	
AAR is the site specific annual average rainfall	
h is the hydraulic filter efficiency	
35 Day rainwater storage calculations calculated at 9.6% (35/365) of the Annual rainwater yield (litres) to account for 35 days of storage for periods of drought	
A (collection area (m2))	168
e (yield coefficient)	0.7
AAR (site specific annual average rainfall)	858.7
h (hydraulic filter efficiency)	0.9
Yr (rainwater yield) in litres	8725

Appendix 3

Average rainfall (mm) from nearest weather station

Climate period: 1991-2020

Station: North Heath

Month	Maximum temperature (°C)	Minimum temperature (°C)	Days of air frost (days)	Sunshine (hours)	Rainfall (mm)	Days of rainfall ≥1 mm (days)	Monthly mean wind speed at 10 m (knots)
January	8.55	2.52	–	55.25	92.33	–	–
February	9.02	2.24	–	83.04	63.49	–	–
March	11.74	3.44	–	117.86	52.58	–	–
April	14.83	4.64	–	170.19	52.57	–	–
May	17.61	6.99	–	205.07	46.86	–	–
June	20.65	9.68	–	199.60	55.92	–	–
July	23.31	11.77	–	215.93	63.28	–	–
August	22.99	11.58	–	196.60	63.61	–	–
September	19.93	9.46	–	148.17	63.38	–	–
October	15.89	7.06	–	109.26	103.33	–	–
November	11.89	4.40	–	66.22	103.13	–	–
December	9.20	2.62	–	54.06	98.22	–	–
Annual	15.50	6.39	–	1621.25	858.70	–	–

Appendix 4

Details of rainwater harvesting tank

BEST SELLER



10,000 LITRE UNDERGROUND POTABLE WATER STORAGE TANK

Product Ref: **VTP-1000**

CUSTOMER OFFLOADING | MDPE | ROUND | BELOW GROUND

Volume: **10000ltr**
Weight: **490.000kg**
Dimensions: **L:3980mm W:2180mm H:2540mm**
Lid Size: **450**

Estimated Lead time: 7-10 Working Days

Home Delivery
UK mainland delivery from £85.00 ex VAT

CHECK DELIVERY COST

Quantity: 1

£2,396.00 ex VAT
(£2,875.20 inc VAT)

PayPal Pay in 3 interest-free payments on purchases from £20-£3,000. Learn more

mondu B2B Pay Later & Instalment Options Learn more

ADD TO BASKET

ENQUIRE | REVIEW | PRICE MATCH

Appendix 5

Details of filtration system

Ozo-Pure Description

- Max. 30 LPM flow through system, uses rainwater tank pump (should have it's own pump controller, variable or fixed speed) to deliver water
- Inlet cartridge filter (typical replacement 4-6 months)
- Electrolytic unit; generates active oxygen species (incl. oxygen, ozone, hydroxyl radical) directly into water – purifies and refreshes the water
- Contact vessel
- Whisper quiet circulation pump for water refresh
- Outlet cartridge filter (typical replacement 4-6 months)
- Outlet post carbon filter sanitiser – instant-on UV disinfection (only on when water is being produced, so very long life)
- Electrical control control panel (230V/1Ph/50Hz); system starts automatically when water is needed
- 22mm / ¾" In/Out Connections

Ozo-Pure 30 60cmW x 40cmD x 120cmH








Appendix 6

Schematic of rainwater harvesting system.

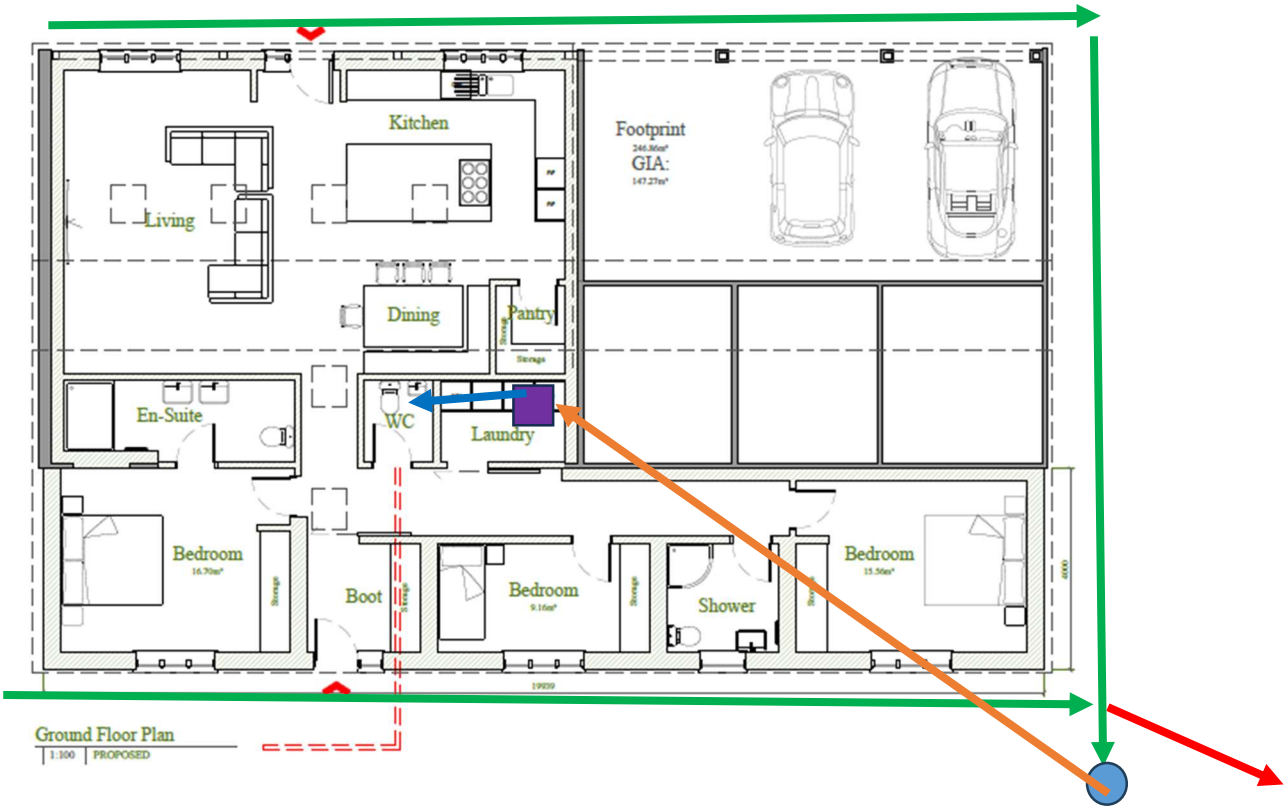

- Rainwater downpipes with leaf guards and initial filtration plus underground drainage
- First flush diverter
- Potable underground rainwater harvesting tank with sedimentation and calmed inlet
- Return flow to treatment unit via pump set above sediment line
- Ozo-Pure 30 treatment unit
- Internal water distribution