



Ian Sharland

LIMITED

Noise & Vibration Control Specialists

Ashfield House
Back Lane
Marlborough
Wiltshire SN8 1JJ
Telephone: (01672) 515761
Email: office@iansharland.co.uk



OLD CLAYTON KENNELS STORRINGTON ROAD WASHINGTON WEST SUSSEX

ACOUSTIC ASSESSMENT TO DISCHARGE
CONDITION 16 OF PLANNING APPLICATION DC/23/0701
v.1

Client:

CLOUD 9 ARCHITECTURE

Cell Block Studios
HM Naval Base
College Road
Portsmouth
PO1 3LJ

7th September 2026
Ref: M6087

CONTENTS

1. SUMMARY	2
2. INTRODUCTION	3
3. SURVEY OF NOISE LEVELS	4
4. ACOUSTIC GUIDELINES & STANDARDS	5
4.1 BS8233:2014 Guidance on Sound Insulation and Noise Reduction for Buildings	5
4.2 World Health Organisation Guidelines	6
4.3 Approved Document F Ventilation	6
4.4 Approved Document O – Overheating	8
4.5 IOA/ANC Acoustics Ventilation and Overheating – Residential Design Guide	9
5. ACOUSTIC DESIGN	11
6. MEANS OF VENTILATION	17
6.1 Overheating Mitigation, Approved Document O	17
6.2 General Ventilation/Condition 16	19
7. CONCLUSION	20
 FIGURE 1 – LOCATION PLAN	 21
FIGURE 2 – SITE PLAN	22
APPENDIX 1 - TERMINOLOGY RELATING TO NOISE	23

Project Reference	M6087
Issue No.	1
Reviewed	Richard Sharland MA MSc CEng MIOA
Signature	
Author	Eddie Oxborough MSc MIOA
Signature	
Date	7th September 2026

This report has been prepared by Ian Sharland Limited with all reasonable skill, care and diligence, and taking account of the Services and the Terms agreed between Ian Sharland Limited and the Client. This report is confidential to the client, and Ian Sharland Limited accepts no responsibility whatsoever to third parties to whom this report, or any part thereof, is made known, unless formally agreed by Ian Sharland Limited beforehand. Any such party relies upon the report at their own risk.

Ian Sharland Limited disclaims any responsibility to the Client and others in respect of any matters outside the agreed scope of the Services.

1. SUMMARY

- 1.1 An assessment of environmental noise has been undertaken at the Old Clayton Kennels on Storrington Road, Washington, West Sussex, .
- 1.2 The objective of the exercise is to demonstrate how an acceptable level of acoustic amenity will be provided for the future residents of the bungalows.
- 1.3 The existing ambient noise climate affecting the site has been established (Section 3), and the survey has confirmed a typical variation in daytime and night-time levels.
- 1.4 Section 4 provides a description of the relevant criteria which would commonly be applied to projects of this nature.
- 1.5 The means of attenuating the external noise levels have been described in Section 5, the key element being the provision of standard double glazing rated at 27 dB $R_w + C_{tr}$. Trickle ventilators, where used, should achieve a minimum of 30 dB $D_{n,e,w}$ in the open position.
- 1.6 Section 5 also provides an assessment of noise in external amenity areas, and confirms that the acoustic barriers will be required to the southern and western boundaries (2.5m and 1.8m high, respectively).
- 1.7 Consideration has then been given to the final clause of Condition 16, and the acoustic impact of an open window strategy to address ventilation issues. It is noted that the majority of living rooms and bedrooms would be adversely affected if windows are open. Therefore, a supplementary mechanical solution, sufficient to satisfy the requirements of Approved Document F, will be required in the following areas:

Plot	Living Rooms	Bedrooms
1	All	South & East
2 & 3	South, West & East	None (open windows OK)
4 & 5	All	West
6 & 7	All	South & West
8	All	South, West & East

Table 6.3 – Elevations where Open Windows are NOT Acceptable under Condition 16

- 1.8 It is noted that, notwithstanding the requirements of Condition 16, an assessment of the noise against ADO thresholds indicates that an open window strategy may be adopted to counter overheating.
- 1.9 Overall, it is concluded that, with the recommended measures in place, occupants of new properties will be provided with an acceptable acoustic environment

2. INTRODUCTION

- 2.1 An assessment of environmental noise has been undertaken at the site of a new development of eight bungalows at Storrington Road, Washington, West Sussex.
- 2.2 The site is situated adjacent to the A283, to the eastern edge of Washington (Figure 1 –Site Location).
- 2.3 The wider development includes a 60 bedroom care home immediately to the east.
- 2.4 It is recognised that the site may be subject to various sources of environmental noise, road traffic being the most significant, and Condition 16 of the Planning Consent recognises the need to protect the acoustic amenity of prospective residents. This states:

No development above ground level shall take place on site until a scheme for protecting the proposed development from noise has been submitted to, and approved in writing by the Local Planning Authority. The proposed scheme shall achieve the following noise levels:

- a) *Internal day time (0700 - 2300) noise levels shall not exceed 35dB LAeq, 16hr for habitable rooms (bedrooms and living rooms with windows open)*
- b) *Internal night time (2300 - 0700) noise levels shall not exceed 30dB LAeq with individual noise events not exceeding 45dB LAm_{ax} (bedrooms and living rooms with windows open).*
- c) *Garden/external amenity spaces should not exceed 55 dB LAeq, 16hr.*

If it is predicted that the internal noise levels specified above will not be met with windows open, the proposed mitigation scheme shall assume windows would be kept closed, and will specify an alternative rapid/purge ventilation system, to reduce the need to open windows. As a minimum, this will usually consist of a mechanical heat recovery ventilation system with cool air by-pass or equivalent.

- 2.5 This report sets out the means by which the design of the scheme will meet the acoustic objectives set out in Condition 16 of the Planning Consent.

3. SURVEY OF NOISE LEVELS

- 3.1 The first step in the assessment of potential impact is to measure and describe the existing ambient noise levels affecting the site.
- 3.2 Reference is here made to the 2023 assessment by TetraTech, submitted alongside the planning application. Their report 784-B023904 “Noise Assessment for Proposed Development”, v.6 dated 18 April 2023, described a thorough survey of environmental noise levels around the site, and subsequent analysis of impacts.
- 3.3 In brief, the site noise survey was conducted over a 5 day period, between Thursday 24th June 2021 to Monday 28th June 2021, involving continuous monitoring on the south-west of the site (adjacent to the A283 Storrington Road). In addition, attended short term measurements were taken during day, evening and night time periods at four other positions, distributed around the site boundary.
- 3.4 A computer model of the site was then developed by Ian Sharland Limited, using DGMR iNoise software, using the baseline survey data. The model reflects the new and retained buildings in the locality and the adjacent road network. Noise sources were then introduced, the strength of which were calibrated to mirror the on-site measurements.
- 3.5 The model was then used to provide predictions for the noise levels across the site, during day time and night time periods.
- 3.6 Sections 5 & 6 of this report will discuss these noise levels, in respect of their suitability for residential building.

4. ACOUSTIC GUIDELINES & STANDARDS

4.1 BS8233:2014 Guidance on Sound Insulation and Noise Reduction for Buildings

- 4.1.1 There is much guidance on the levels of intrusive noise which would be considered acceptable within residential accommodation such as this. Typical advice is found in British Standard 8233:2014 "Guidance on Sound Insulation and Noise Reduction for buildings". Following similar guidance in the 1999 World Health Organisation report "Guidelines for Community Noise", the Standard sets out the following limits for indoor ambient noise levels within living rooms and bedrooms of residential accommodation. This suggests:

Activity	Location	0700 - 2300	2300 - 0700
Resting	Living Room	35 dB(A) LAeq, 16 hr	-
Dining	Dining room/Area	40 dB(A) LAeq, 16 hr	-
Sleeping	Bedroom	35 dB(A) LAeq, 16 hr	30 dB(A) LAeq, 8 hr

Table 4.1 - BS8233 Indoor Guideline Values

- 4.1.2 It is usually considered that an open window will provide a reduction of some 10-15 dB(A)¹. Therefore the 'good' internal standards quoted above would broadly equate to the following targets immediately outside the buildings:

Activity	Location	0700 - 2300	2300 - 0700
Resting	Living Room	48 dB(A) LAeq, 16 hr	-
Dining	Dining room/Area	53 dB(A) LAeq, 16 hr	-
Sleeping	Bedroom	48 dB(A) LAeq, 16 hr	43 dB(A) LAeq, 8 hr

Table 4.2 - BS8233 Derived Facade Guideline Values

- 4.1.3 BS8233 recognises that, where development is considered necessary or desirable, despite external noise levels above WHO guidelines, the internal target levels may be relaxed by up to 5 dB, and reasonable conditions will be achieved².
- 4.1.4 It should be noted that the levels quoted in BS8233 are intended to reflect the acceptability of steady, continuous noise. Sources of intermittent and tonal noise may generate greater annoyance for a similar overall magnitude. Whilst BS8233 does not explicitly state a correction for those circumstances, it may be appropriate to consider that the Good and Reasonable standards would be achieved with levels which are perhaps 5 dB lower than stated in the table above.
- 4.1.5 It is also noted that BS8233 was written from a view of designing new buildings to protect occupants from existing noise sources. This does necessarily infer, however, that the

¹ Reference PPG24 Planning & Noise, which adopted a mid-range value of 13 dB(A)

² Note, the relaxation specified in BS8233 must be read in conjunction with parallel guidance set out in Approved Document O.

acceptability of an occupant to an absolute level noise within a building will be different if the introduction of the noise source post-dates the construction of the building.

4.2 World Health Organisation Guidelines

- 4.2.1 Further advice is provided in the 1999 WHO report "Guidelines for Community Noise".
- 4.2.2 This indicates that the steady noise level in external amenity areas, such as gardens or outdoor living areas should not exceed 55 dB(A) $L_{Aeq, t}$, and should preferably be designed below 50 dB(A) $L_{Aeq, t}$.
- 4.2.3 The document also provides guidance on the impact of peak noise levels on sleeping conditions. This suggests that levels above 45 dB(A) L_{Amax} inside a bedroom would be disturbing to sleep. With windows open, this would equate to a level of approximately 58 dB(A) L_{Amax} externally.

4.3 Approved Document F Ventilation

- 4.3.1 Approved Document F (2021 edition, Volume 1 & 2) of the Building Regulations 2010 sets out the requirements for ventilation in dwellings. ADF describes three types of ventilation, summarised in the table below:

Type of Ventilation	Definition in ADF	Location/reason for ventilation	Required
Whole Dwelling Ventilation ³	Whole building ventilation (general ventilation is normally continuous ventilation of rooms or spaces at a relatively low rate to dilute and remove pollutants and water vapour not removed by operation of extract ventilation, purge ventilation or infiltration, as well as supplying outdoor air into the building. For an individual dwelling this is referred to as 'whole dwelling ventilation'.	To provide fresh air to the building and to dilute and disperse residual water vapour not dealt with by extract ventilation as well as removing other pollutants which are released throughout the building	Continuously
Extract Ventilation	Extract ventilation is the removal of air directly from a space or spaces to the outside. Extract ventilation may be provided by natural means, e.g., by passive stack ventilation) or by mechanical means (e.g., by an extract fan or central system)	From rooms where most water vapour and/or pollutants are released, e.g., due to activities such as cooking or bathing. This is to minimise their spread to the rest of the building	Continuously or intermittently
Purge Ventilation	Purge ventilation is manually controlled ventilation of rooms or spaces at a relatively high rate to rapidly dilute pollution and/or water vapour. Purge ventilation may be provided by natural means (e.g., an openable window) or by a mechanical means (e.g., a fan)	Throughout the building to aid the removal of high concentrations of pollutants and water vapour released from occasional activities such as painting and decorating or accidental released such as smoke from burnt food or spillage of water	Occasionally

Table 4.3 – ADF Types of Ventilation

4.3.2 It is important to differentiate between the need to provide 'purge ventilation' as required occasionally under ADF, against the provision of ventilation to help control overheating, which is now covered by Approved Document O Overheating. ADF states:

This document <ADF> sets minimum standards for purge ventilation for rapidly diluting indoor air pollutants and extracting water vapour where necessary in habitable rooms in dwellings. For domestic-type buildings, Part O may require a higher standard than the guidance given in this document for purge ventilation to remove excess heat. In this case, the higher of the two standards should be followed.

4.3.3 There are various types of ventilation described in ADF, including:

³ Not to be confused with 'background ventilation'. ADF defines the term 'background ventilator' as a trickle vent.

Ventilation System	Provision with ADF System / Purpose		
	Whole Dwelling Ventilation	Extract Ventilation	Purge Ventilation
Background ventilation and intermittent extract fans	Background ventilators (trickle vents)	Intermittent extract fans	Typically provided by opening windows
Continuous mechanical extract (MEV)	Continuous mechanical extract – minimum low rate. Trickle vents to provide inlet air	Continuous mechanical extract – minimum high rates. Trickle vents to provide inlet air	Typically provided by opening windows
Continuous mechanical supply and extract with heat recovery (MVHR)	Continuous mechanical supply and extract – minimum low rate	Continuous mechanical supply and extract – minimum high rate	Typically provided by opening windows

Table 4.4 – ADF Template Systems

- 4.3.4 With regard to the provision of purge ventilation within habitable rooms, the approved document notes that there may be practical difficulties in achieving this (e.g., if unable to open a window due to excessive noise from outside).
- 4.3.5 Whilst ADF does give advisory residential noise limits during normal conditions (not boost)⁴, it does not itself confirm limits for noise during purge ventilation.

4.4 Approved Document O – Overheating

- 4.4.1 Approved Document O Overheating describes the means by which designers can **protect the health and welfare of occupants of the building by reducing the occurrence of high indoor temperatures.**
- 4.4.2 The scope of the Document applies to residential dwellings and institutions, and includes the following building types:

⁴ In line with BS8233 guidance.

Title	Purpose for which the building is intended to be used
Residential (dwellings)	Dwellings, which includes both dwellinghouses and flats.
Residential (institutional)	Home, school or other similar establishment, where people sleep on the premises. The building may be living accommodation for the care or maintenance of any of the following. a. Older and disabled people, due to illness or other physical or mental condition. b. People under the age of 5 years.
Residential (other)	Residential college, hall of residence and other student accommodation, and living accommodation for children aged 5 years and older.

Table 4.5 – ADO Scope

4.4.3 In respect of the acoustic implications, the Document considers the acceptable limits for noise within bedrooms at night. This applies when the method of overheating control is active – whether that be an open window, passive vent or mechanical system. The noise limits are summarised below:

- a. 40dB $L_{Aeq,t}$, averaged over 8 hours (between 11pm and 7am).**
- b. 55dB $L_{Amax,f}$ more than 10 times a night (between 11pm and 7am).**

4.4.4 Should an analysis of the external noise levels (for open windows/vents) indicate that these values will be exceeded, an alternative strategy should be adopted.

4.5 IOA/ANC Acoustics Ventilation and Overheating – Residential Design Guide

4.5.1 The Institute of Acoustic and Association of Noise Consultants have published the 'Acoustics Ventilation and Overheating – Residential Design Guide' (January 2020) to promote best practice in the design of residential buildings to control overheating in areas of high ambient noise.

4.5.2 When providing design targets inside the dwellings, the AVOG document advises that the internal noise standard of BS8233:2014 (as copied here in Table 4.2) should be achieved when providing adequate ventilation as defined in ADF. However, the document continues to propose that it is considered reasonable to allow higher levels of internal ambient noise from transport sources when higher rates of ventilation are required in relation to the overheating condition.

4.5.3 This proposition is based on the fact that overheating will occur for only part of the time, during which there will be a trade-off between acoustic and thermal conditions, given that

residents would have some control over their environment (a principle well established in the field of thermal comfort).

- 4.5.4 The guide indicates that the sound level difference across a façade, with standard opening windows, would be 13 dB(A), but that this figure may be greater if windows are shielded by balconies.
- 4.5.5 BS8233:2014 states that, if internal noise levels are no more than 5 dB greater than the levels shown here in Table 4.2, this would be a 'reasonable' standard. Therefore, if external noise levels do not exceed the following values when windows are open, conditions should be considered wholly acceptable, and therefore the threshold between No and Low Observed Adverse Effect Levels:

Location	0700 - 2300	2300 - 0700
Living Room	53 dB(A) LAeq, 16 hr	-
Bedrooms	53 dB(A) LAeq, 16 hr	48 dB(A) LAeq, 8 hr

Table 4.6 – Proposed LOAEL Façade Noise Levels with Windows Open

- 4.5.6 To consider the upper limit, beyond which internal conditions should not be deemed acceptable, reference is made to issue of speech interference. With reference to the numerical values in BS8233 (see Table 4.5 above), the AVOG document adopts an internal daytime limit of 50 dB(A), which would then equate to an external limit of 63 dB(A) when windows are open.
- 4.5.7 At night, reference is made to the WHO Night Noise Guidelines, which developed the original WHO Guidelines for Community Noise report. This states that if external noise levels exceed 55 dB(A) L_{Aeq} , 'adverse health effects occur frequency and a sizeable proportion of the population is highly annoyed and sleep disturbed'.
- 4.5.8 The table below therefore may be taken to represent the threshold for SOAEL:

Location	0700 - 2300	2300 - 0700
Living Room	63 dB(A) LAeq, 16 hr	-
Bedrooms	63 dB(A) LAeq, 16 hr	55 dB(A) LAeq, 8 hr

Table 4.7 – Proposed SOAEL Threshold Façade Noise Levels with Windows Open

5. ACOUSTIC DESIGN

EXTERNAL AMENITY SPACE

- 5.1 The World Health Organisation offers guidance that, to protect the majority of people from being seriously annoyed during the daytime, the sound pressure level on balconies, terraces and outdoor living areas should not exceed 55 dB L_{Aeq} for a steady, continuous noise. This criterion is repeated in Condition 16.
- 5.4 The initial modelling of the overall landscaping design yields results where the amenity noise levels would be exceeded in the rear gardens of Plots 5 – 8. The excess is up to 10 dB(A).
- 5.3 In order to address this excess, it will be necessary to adjust the perimeter screening of the site.
- 5.4 Their proposed mitigation included a 2.5m high acoustic fence along the south boundary and 1.8m high along the west boundary, as shown in green and blue below:



- 5.5 The construction of the fencing should be 25mm thick, square-edged timber boards with butt-joints and a 25mm x 150mm cover strip behind each joint. The design of the timber posts will avoid gaps between posts and boards, and barge boards will be used to seal any gaps at the bottom of the barrier.
- 5.6 The predicted noise levels across the amenity spaces then fall below the 55 dB(A) target:



Figure 5.1 – Amenity Area Noise Levels L_{Aeq} , 16 hr

INTERNAL NOISE LEVELS

5.7 The model has then been used, with these barriers in place, to produce maps for noise levels affecting the facades of the properties. These predictions are shown in the figures immediately below:

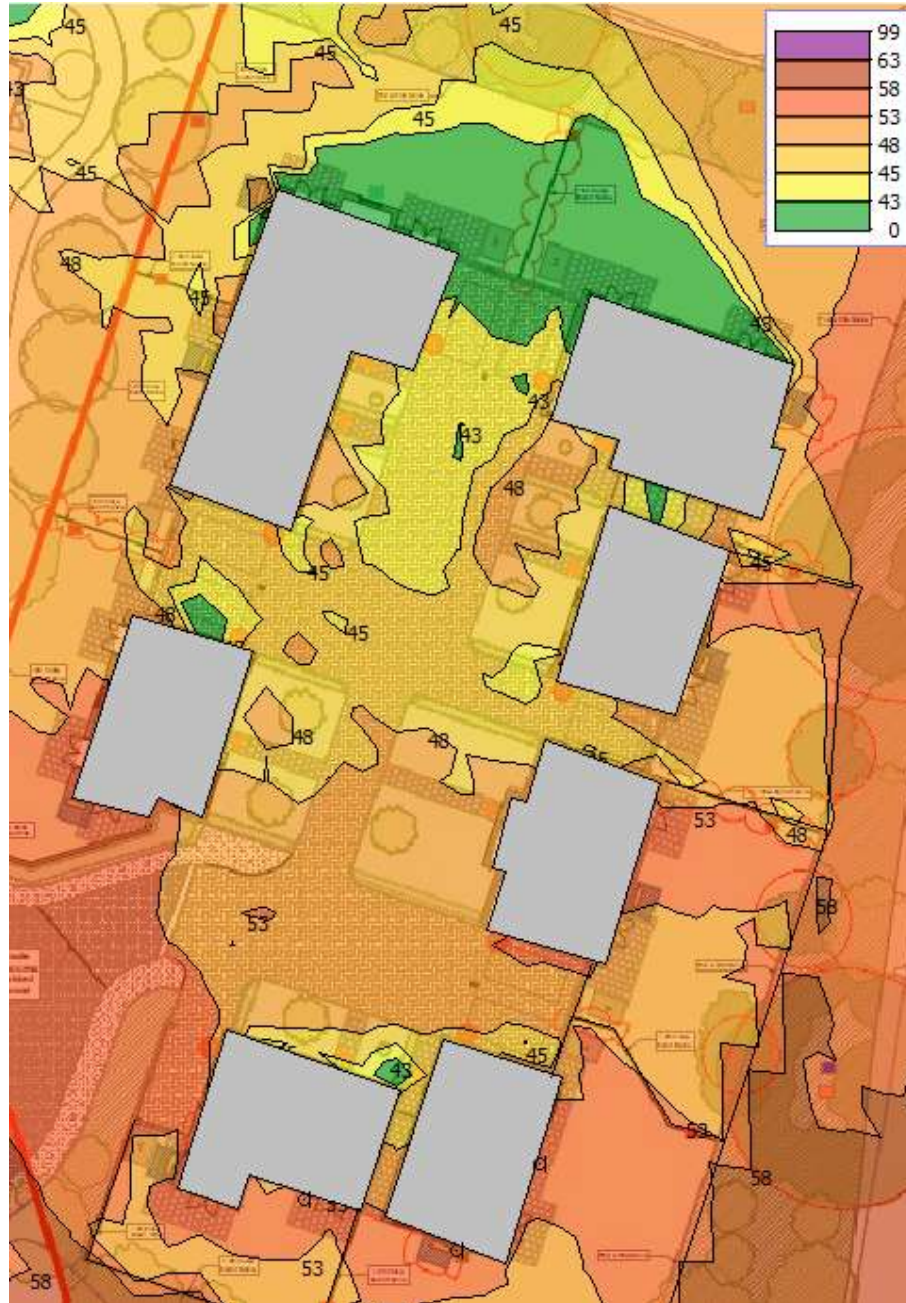


Figure 5.2 - Day Time LAeq, 07.00 – 23.00

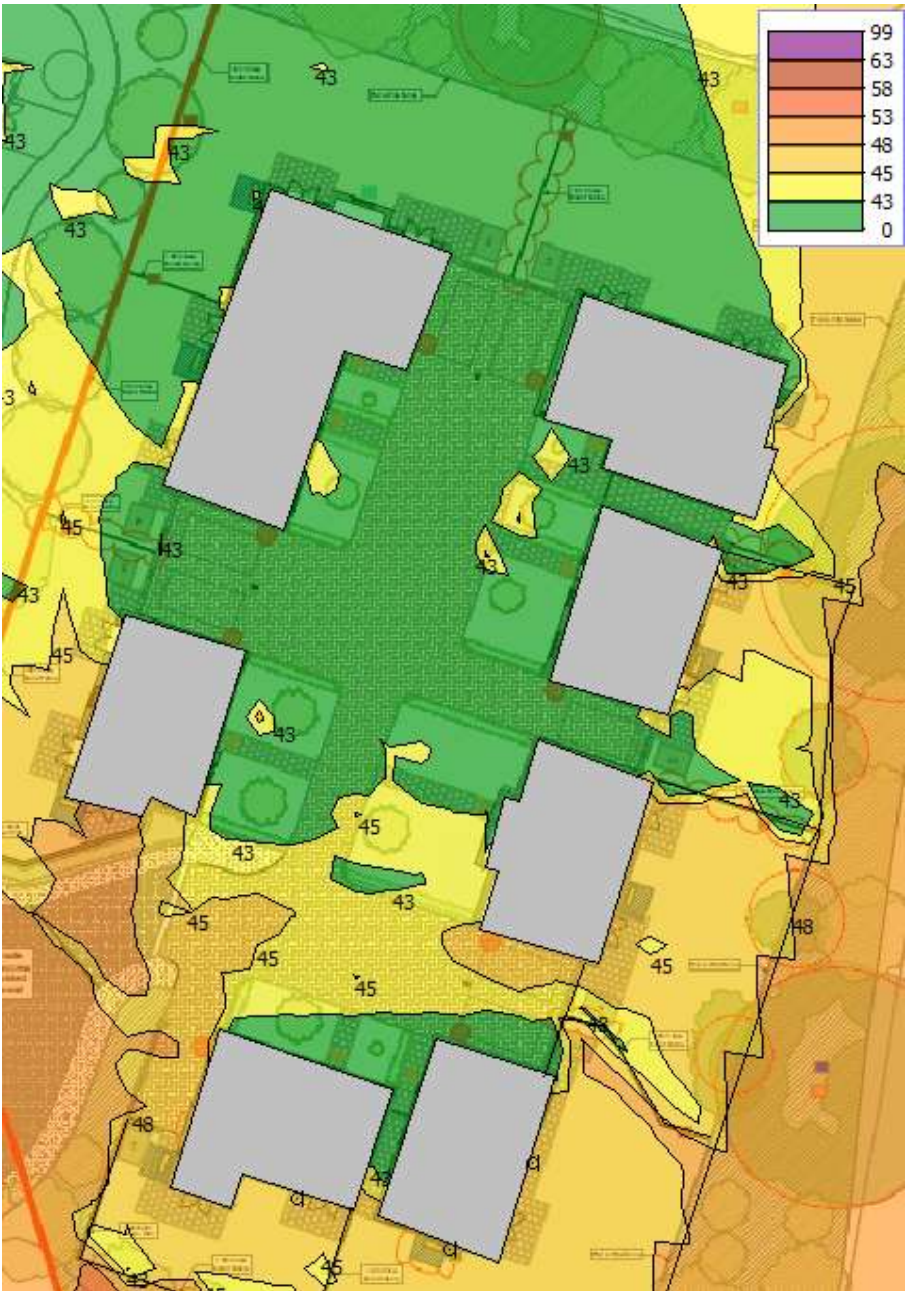


Figure 5.3 - Night Time LAeq, 23.00 – 07.00

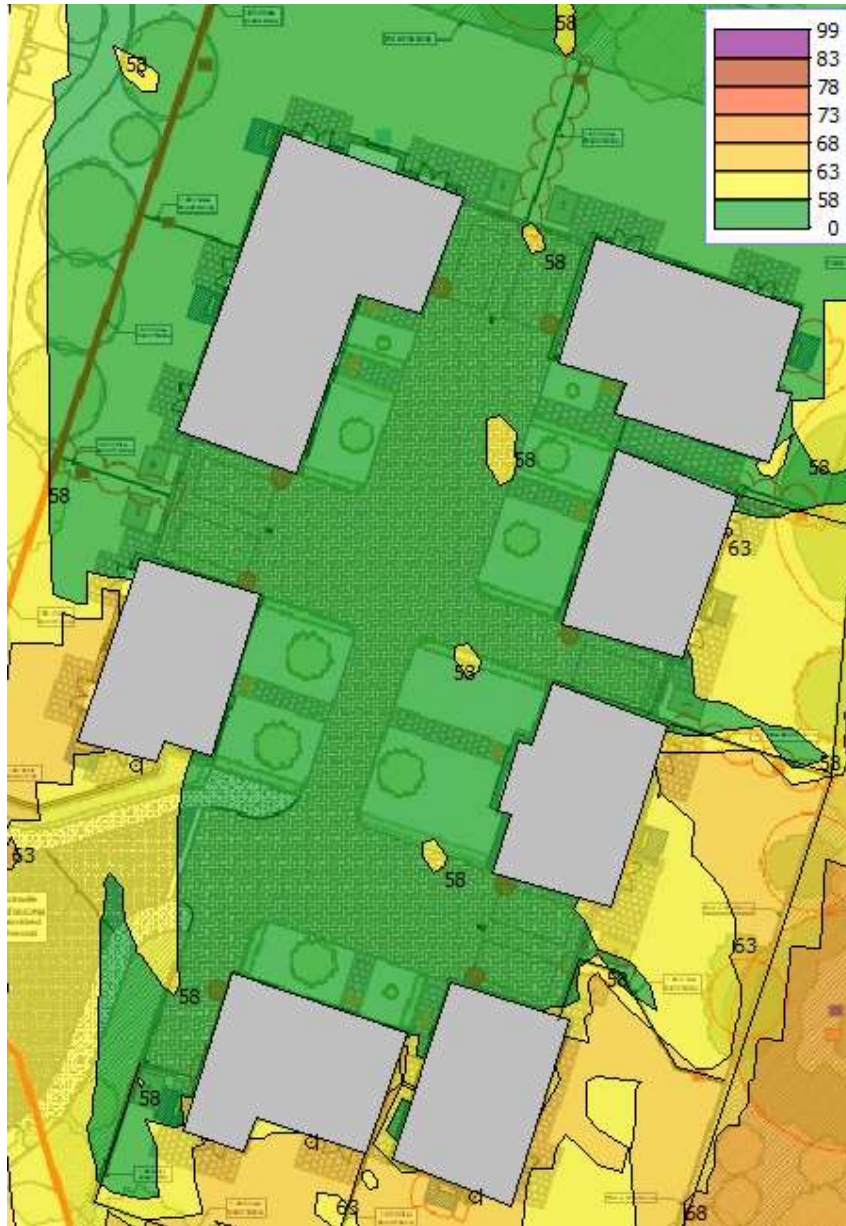


Figure 5.4 - Night Time LAmax, 2300 – 0700

5.8 Section 4.4.1 of this report has provided guidance for internal noise levels within residential rooms as stated within BS8233. These mirror the requirements of Condition 16, namely

Living Rooms:	≤ 35 dB(A) LAeq, 07.00 – 23.00
Bedrooms:	≤ 30 dB(A) LAeq, 23.00 – 07.00, and also ≤ 45 dB(A) LAmax, 23.00 – 07.00

5.9 In respect of glazing, the highest noise levels incident upon any façade of the development are as follows:

Day Time: 58 dB(A) LAeq, 07.00 – 23.00
Bedrooms: 50 dB(A) LAeq, 23.00 – 07.00, and also
65 dB(A) LAmax, 23.00 – 07.00

- 5.10 The facades of the building therefore need to provide, in the worst case, a sound level difference of 23 dB(A) for Living Rooms, and 20 dB(A) for bedrooms.
- 5.11 It is understood that the external walls will be a cavity masonry construction comprising brick outer leaf, full fill cavity and a 100mm blockwork internal leaf. The acoustic performance of this is c.50 dB Rw + Ctr, which is quite sufficient for the requirement.
- 5.12 The critical element will be the glazing, where a minimum performance of 27 dB Rw + Ctr is recommended.
- 5.13 The table below sets out the frequency targets for the glazing:

Frequency	Hz	63	125	250	500	1K	2K	4K	Overall Rating Rw + Ctr
Sound Reduction	dB	21	21	18	26	37	42	33	27

Table 5.1 – Glazing Performance Specification

- 5.14 It is recommended that a 4 / 16 / 4 configuration will be suitable.
- 5.15 With respect to background ventilation, if any where trickle vents are required, these vents should be specified with a minimum acoustic performance of 30 dB D_{n,e,w} in the open position.
- 5.16 The means of providing higher rates of ventilation will be discussed in Section 6 of this report.

6. MEANS OF VENTILATION

6.1 Overheating Mitigation, Approved Document O

- 6.1.1 The preferred means of countering overheating issues is usually to rely on open windows to provide the necessary ventilation.
- 6.1.2 Open windows do have an adverse impact on the acoustic integrity of the building construction, however, and ADO has therefore confirmed the maximum acceptable internal noise levels when windows are opened for this specific purpose.
- 6.1.3 To repeat Para.4.7.3 above, the acceptable levels are:
- a. 40dB $L_{Aeq,t}$, averaged over 8 hours (between 11pm and 7am).
 - b. 55dB $L_{Amax,f}$ more than 10 times a night (between 11pm and 7am).
- 6.1.4 The question is then how the internal targets of 40 dB $L_{Aeq,t}$ and 55dB $L_{Amax,f}$ equate to an external 'façade noise level', when the windows are open for the purposes of overheating.
- 6.1.5 At this point, it is necessary to explain the difference between free-field and façade noise levels. The former represents the sound level which would be recorded at a particular position, with no buildings (or other reflecting surfaces) nearby. The latter represents the sound level which would be recorded directly in front of a building. As such, it will include acoustic energy which passes the microphone and is then reflected back off the building, past the microphone again. The correction between two equivalent measurements is normally taken to be 3 dB (the façade value being the louder).
- 6.1.6 It is then necessary to consider the likely acoustic loss through the open window. Approved Document O provides a simplified estimate of 9 dB. This relates to properties in a 'medium risk' area for overheating, as would be the case here. The loss is based on windows being set to an open area which is 4% of the floor area of the bedroom.
- 6.1.7 It is noted that this loss relates to the difference between the free-field noise level at the location and the resulting internal noise level. The difference between the façade noise level and resulting internal noise level would be some 7 dB.
- 6.1.8 This value is lower than the guidance provided in PPG24 'Planning and Noise', which advised that a partially open window would provide a reduction between 10 and 15 dB(A).
- 6.1.9 The value quoted in Approved Document O is offered in a conservative manner, to allow for a safe, simplified assessment of conditions. The Document does allow for a more detailed assessment of acoustic loss.

- 6.1.10 In the first instance, reference is made here to the work by Napier University, and their much-referenced report on the acoustic performance of windows, NANR116: 'Open/Closed Window Research - Sound Insulation Through Ventilated Domestic Windows', April 2007
- 6.1.11 To counter overheating, the windows require an open area of at least 4% of the floor area. A review of the floor plans indicates that bedrooms have floor areas approximately 14m². This indicates that the open area of the windows would need to be 0.56m².
- 6.1.12 Assuming a side hung casement window, the Napier Report would indicate that the acoustic loss from outside (façade level) to inside would be 12 – 15 dB(A), for the openings here.
- 6.1.13 The final approach is to consider a 'first-principles' calculation of the loss through the window. This would reflect the open area, the sound reduction of the opening (zero) and the acoustic absorption of the room into which the sound is travelling.
- 6.1.14 Table 6.1 provides this calculation and indicates an acoustic loss from outside (façade level) to inside of 13 dB(A).

Frequency	Hz	63	125	250	500	1000	2000	4000	8000	dB(A)
Reference facade SPL, outside	dB	105	102	98	96	96	93	87	82	100
SRI open Window	dB	0	0	0	0	0	0	0	0	
Reflection Loss, 0.56m ²	dB	-4	-2	0	0	0	0	0	0	
Area correction, 0.56m ²	dB	-2.5	-2.5	-2.5	-2.5	-2.5	-2.5	-2.5	-2.5	
Absorption in room	m ²	11.27	11.27	11.27	11.27	11.27	11.27	11.27	11.27	
Absorption Loss	dB	-10.5	-10.5	-10.5	-10.5	-10.5	-10.5	-10.5	-10.5	
Net SPL	dB	88	87	85	83	83	80	74	69	87
Difference	dB	17	15	13	13	13	13	13	13	

Table 6.1 – Calculation of loss through an open window

- 6.1.15 The table below summarises the various results:

Source	Difference between façade sound level (road traffic) and resulting internal noise level
ADO Simplified	9 dB(A)
PPG24	10 – 15 dB(A)
Napier University NANR116 Study	12 – 15 dB(A)
First Principles Calculation	13 dB(A)

Table 6.2 – Acoustic Loss for Traffic Noise through 0.56m² opening.

- 6.1.16 It is therefore concluded that a reduction of 13 dB(A) would be a reasonable, safe prediction of the acoustic loss across this development, and the criteria of ADO would therefore equate to external facade noise limits of,

Bedrooms – 53 dB LAeq,2300 - 0700

Bedrooms – 68 dB LAfmax, 2300 - 0700

- 6.1.17 A review of the noise maps in Figures 5.2 – 5.4 indicates that no façade will exceed these façade noise levels. Therefore, properties can rely upon open windows for means of overheating.

6.2 General Ventilation/Condition 16

- 6.2.1 Notwithstanding the statutory requirements of ADO, Planning Condition 16 indicates that the internal noise targets of BS8233 (see Para 5.8) must be achieved when windows are open.

- 6.2.2 Allowing the same 13 dB(A) loss through a partially open window, the condition sets the following external noise limits for openable window:

Living Rooms: ≤48 dB(A) LAeq, 07.00 – 23.00

Bedrooms: ≤43 dB(A) LAeq, 23.00 – 07.00, and also
≤58 dB(A) LAmax, 23.00 – 07.00

- 6.2.3 With reference to Figure 5.2, it can be seen that only living rooms on the north elevation of Plots 3 and 4 can adopt open windows for ventilation.

- 6.2.4 At night, bedrooms on the following elevations could adopt an open window ventilation strategy:

Plot	Elevation
1	North & West
2 & 3	All
4 & 5	North, East and South
6 & 7	North & East
8	North

Table 6.3 – Bedrooms Where Open Windows are Acceptable

- 6.2.5 For all other living rooms and bedrooms, it will be necessary to provide a means of ventilation to satisfy the requirements of Approved Document F, without opening windows.

- 6.2.6 Such systems might include whole dwelling ventilation systems or individual room fans. Once the mechanical consultant and Client have agreed the preferred solution, the selections should be referred to the Acoustician, to check that internal fan noise will be acceptable.

7. CONCLUSION

- 7.1 The foregoing assessment has looked at the levels of ambient noise affecting the new residential development at Storrington Road, Washington, on behalf of Cloud 9 Architecture.
- 7.2 It has been shown that noise levels within the vast majority amenity areas can meet the WHO's guidance of 55 dB L_{Aeq} , with the provision of acoustic barriers along the southern and western boundaries (2.5m and 1.8m respectively).
- 7.3 It has been concluded that, by specifying appropriate glazing and facade constructions, alongside acoustically treated ventilators, it will be possible to ensure that an acceptable internal environment can be provided within new dwellings when windows are closed.
- 7.4 Condition 16 requires the same standard to be achieved if windows are open. This will not be the case due to the noise affecting for the majority of the building elevations. Therefore, the affected bedrooms and living rooms will require supplementary mechanical ventilation.

FIGURE 1 – LOCATION PLAN



FIGURE 2 – SITE PLAN



APPENDIX 1 - TERMINOLOGY RELATING TO NOISE

Sound Pressure	Sound, or sound pressure, is a fluctuation in air pressure over the static ambient pressure.
Sound Pressure Level	The sound level is the sound pressure relative to a standard reference pressure of 20µPa (20x10 ⁻⁶ Pascals) on a decibel scale.
Decibel (dB)	A scale for comparing the ratios of two quantities, including sound pressure and sound power. The difference in level between two sounds s_1 and s_2 is given by $20 \log_{10} (s_1 / s_2)$. The decibel can also be used to measure absolute quantities by specifying a reference value that fixes one point on the scale. For sound pressure, the reference value is 20µPa.
A-weighting, dB(A)	The unit of sound level, weighted according to the A scale, which takes into account the increased sensitivity of the human ear at some frequencies.
Noise Level Indices	Noise levels usually fluctuate over time, so it is often necessary to consider an average or statistical noise level. This can be done in several ways, so a number of different noise indices have been defined, according to how the averaging or statistics are carried out.
Leq,T	A noise level index called the equivalent continuous noise level over the time period T. This is the level of a notional steady sound that would contain the same amount of sound energy as the actual, possibly fluctuating, sound that was recorded.
Lmax,T	A noise level index defined as the maximum noise level during the period T. Lmax is sometimes used for the assessment of occasional loud noises, which may have little effect on the overall Leq noise level but will still affect the noise environment. Unless described otherwise, it is measured using the 'fast' sound level meter response.
L90,T	A noise level index. The noise level exceeded for 90% of the time over the period T. L90 can be considered to be the "average minimum" noise level and is often used to describe the background noise.
Free-Field	Far from the presence of sound reflecting objects (except the ground), usually taken to mean at least 3.5m.
Façade Noise Level	At a distance of 1m in front of a large sound reflecting object such as a façade.
Fast/Slow Time Weighting	Averaging times used in sound level meters.
Octave Band	Range of frequencies whose upper limit is twice the lower limit.
DnT,w	The single number quantity that characterises airborne sound insulation between rooms over a range of frequencies.
Rw	Single number quantity that characterises the airborne sound insulating properties of a material or building element over a range of frequencies.