

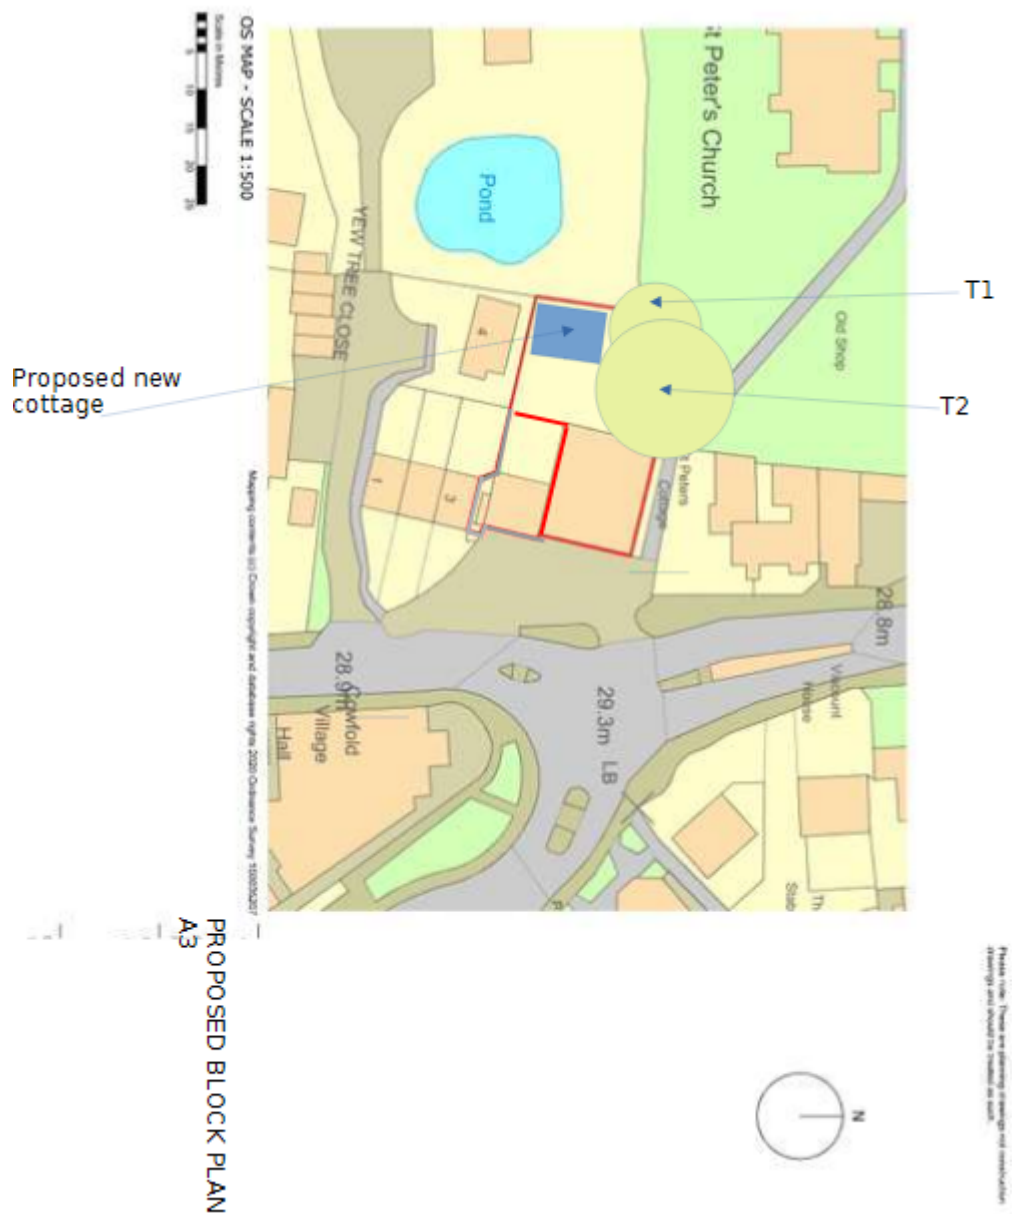


METHOD STATEMENT FOR CONSTRUCTION AVOIDING ROOT PROTECTION AREAS

Location plan showing TPO Trees

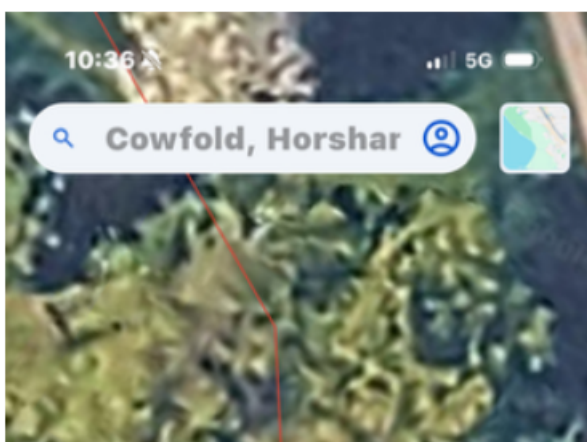

BLOCK PLAN 1:100 AT A3

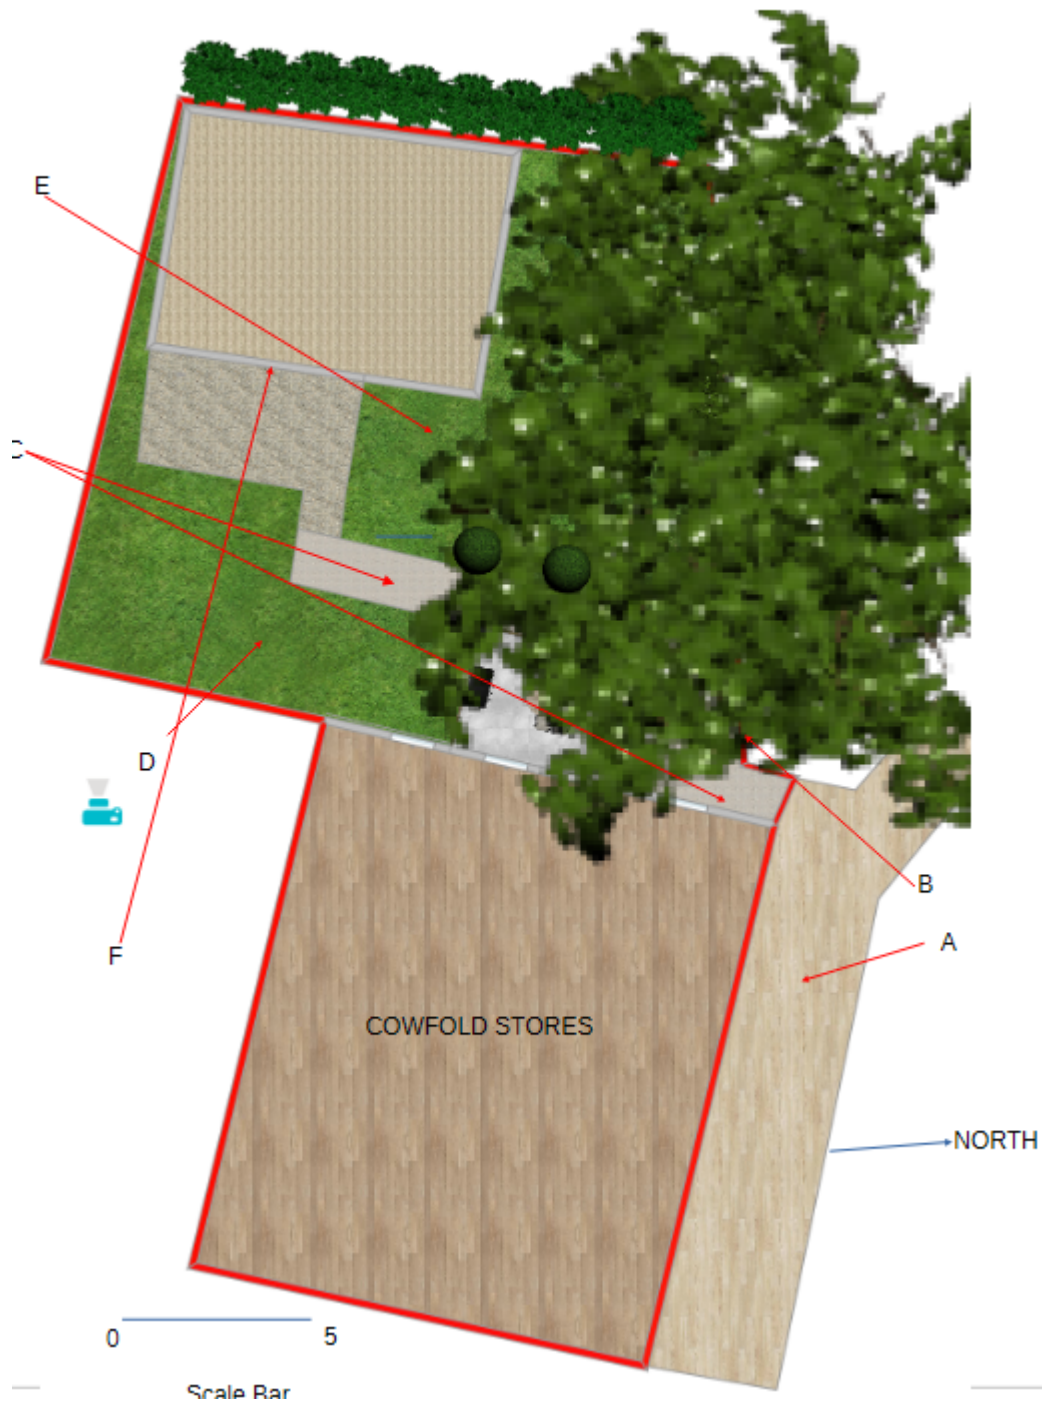

Existing Concrete path C

Deliveries/ material handling and Storage

“Delivery Point” – all materials to be delivered or waste collected will be from parking area which will be temporarily hoarded outside Cowfold Stores.

“Route” for all materials in and out will be from parking area in front of Cowfold Stores, along footpath marked A, through 1m wide gate marked B, over existing concrete path on site marked C (this path can be seen on aerial photo). All material storage during construction only on area marked D.

Materials: Soil from excavation using mini excavator taken to site down route will be put into hydraulic mini dumper and exit via Route to Delivery Point.

Concrete for foundations readymix concrete lorry at Delivery Point with concrete pump at Delivery point pumping concrete in pipe down Route

Bricks/blocks/beams – From Delivery Point using Hydraulic mini dumper down route and stored at D

Timber – From Delivery hand carried and stored at D

Plasterboard – From Delivery hand carried and stored in proposed house

Electric/ plumbing/ sanitaryware/ kitchens/ doors/ other materials – From Delivery and hand carried and stored in proposed house.

Incoming Services

Existing Water main comes into basement of Cowfold Stores and will exit from basement on north west corner of Cowfold Stores to stop cock at F

Existing incoming electric main in basement of Cowfold Stores and will exit in north west corner of Cowfold Stores and will have new meter installed with other building meters and then with supply out from basement to isolator at F.

Gas – none

BT – existing incoming BT supply into basement of Cowfold Stores with branch to be taken through basement to F for fibre connection to proposed house

Drainage

House to be connected into existing manhole underground just to east of house marked E