



Horsham District Council
Parkside
Chart Way
Horsham
West Sussex
RH12 1RL

Your ref
DC/26/0671

Our ref
DSA000054241

Date
28th May 2026

Contact
Tel 0330 303 0119

Dear Sir/Madam,

Proposal: Outline Application for a development of up to 120 dwellings (including 45% affordable) with all matters reserved except for access.

Site: Land Off Old Crawley Road, Faygate, West Sussex, RH12 4RX.

Thank you for your correspondence. Please see our comments below regarding the above planning consultation application.

Inadequate capacity in the foul network

Network Capacity refers to the available capacity in our underground assets that carry wastewater to Waste Water Treatment Works (WWTWs). This includes a range of pipe sizes and material types, Wastewater Pumping Stations (WPS) and supporting infrastructure.

Some capacity issues may be addressed with operational changes, others may require physical works on our assets. We may identify where several developments would benefit from a larger network reinforcement programme to serve them all where significant growth is taking place in close proximity.

Part of our evaluation looks at the risk of flooding incidents arising from the additional flow of material in terms of 'hydraulic overload'. This means we consider whether there is enough room in the pipes for the likely maximum flow from the connection itself. This assessment does not include random events such as ingress of water from broken pipes, changes in flow arising from blockages or unidentified additional flows from misconnections, these are dealt with through other processes outside of our asset growth planning team as they are operational incidents.

Network Capacity is independent of capacity at the WWTW and growth is planned in a different way though in some cases we may have parallel projects to both reinforce both the network and upgrade the treatment works but this is often not required.

For full details of our connection charging arrangement visit: [Connection charging arrangements \(southernwater.co.uk\)](https://southernwater.co.uk)



Southern Water has undertaken a capacity check of the impact that the additional foul sewerage flows from the proposed development will have on the existing public sewer network. This study indicates that these additional flows may lead to a minor increased risk of impact on the sewer network.

Condition

Southern Water hence requests the following condition to be applied: Occupation of the development is to be phased and implemented to align with the delivery by Southern Water of any sewerage network reinforcement required to ensure that adequate waste water network capacity is available to adequately drain the development.

Existing Water Main - tree, buildings, assets within stand-off distance

The 300 mm diameter water main requires a clearance of 6 metres on either side of the water main to protect it from construction works and to allow for future maintenance access.

No excavation, mounding or tree planting should be carried out within 6 metres of the external edge of the public water main without consent from Southern Water. All existing infrastructure, including protective coatings and cathodic protection, should be protected during the course of construction works. Please refer to: <https://www.southernwater.co.uk/media/st5orjvm/stand-off-distances.pdf>

Condition

In order to protect water apparatus, Southern Water requests that if consent is granted, the following condition is attached to the planning permission; The developer must agree with Southern Water, prior to commencement of the development, the measures to be undertaken to protect/divert the public water supply main.

Tree Planting

We have restrictions on the proposed tree planting adjacent to Southern Water sewers, rising mains or water mains. Reference should be made to Southern Water's publication "A Guide to Tree Planting near water Mains and Sewers" (https://www.southernwater.co.uk/media/pddob0vn/ds-tree-planting-guide-1_nwm.pdf) and the Sewerage Sector Guidance (<https://www.water.org.uk/sewerage-sector-guidance-approved-documents/>) with regards to any landscaping proposals and our restrictions and maintenance of tree planting adjacent to sewers, rising mains and water mains.

Condition

In order to protect public apparatus, Southern Water requests that if consent is granted, the following pre commencement condition is attached to the planning permission; The developer must advise the local authority (in consultation with Southern Water) of the landscaping proposals in proximity of public apparatus in order to protect it in accordance with Southern Water's guidance, prior to the commencement of the development.

Proposed SUDS features

If it is the intention of the developer for Southern Water to adopt the proposed SuDS, the system shall be designed and constructed in line with the Design and Construction Guidance www.water.org.uk/sewerage-sector-guidance-approved-documents/.

No Soakaways should be connected to the public surface water sewer.

The supporting documents make reference to drainage using Sustainable Drainage Systems (SuDS). Where SuDS form part of a continuous sewer system, and are not an isolated end of pipe SuDS component, adoption of SuDS will be considered if requested by the developer if they comply with: Design and Construction Guidance (Appendix C), CIRIA guidance and Southern Water SuDS Guidance available here:

<https://www.water.org.uk/sewerage-sector-guidance-approved-documents/>

<https://www.ciria.org/ItemDetail?iProductCode=C753F&Category=FREEPUBS>

<https://www.southernwater.co.uk/media/l4ndl3db/suds-final-080824.pdf>

Where SuDS rely upon facilities which are not adoptable by sewerage undertakers the applicant will need to ensure that arrangements exist for the long-term maintenance of the SuDS facilities. It is critical that the effectiveness of these systems is maintained in perpetuity. Good management will avoid flooding from the proposed surface water system, which may result in the inundation of the foul sewerage system.

Thus, where a SuDS scheme is to be implemented, the drainage details submitted to the Local Planning Authority should:

- Specify the responsibilities of each party for the implementation of the SuDS scheme.
- Specify a timetable for implementation.
- Provide a management and maintenance plan for the lifetime of the development.

This should include the arrangements for adoption by any public authority or statutory undertaker and any other arrangements to secure the operation of the scheme throughout its lifetime.

This initial assessment does not prejudice any future assessment or commit to any adoption agreements under Section 104 of the Water Industry Act 1991.

S106 Connection application

Any new connections to the public sewerage system will require a Section 106 connection application to be submitted and approved by Southern Water Services.

To make an application visit Southern Water's Get Connected service:

<https://developerservices.southernwater.co.uk> and please read our New Connections Charging Arrangements documents which are available on our website via the following link:

<https://www.southernwater.co.uk/developing-building/connection-charging-arrangements>

Please note that, where there are separate systems available Southern Water will not allow surface water to connect into the public foul sewer. If this is not possible, please provide evidence that all other options have been explored.

It is possible that a sewer now deemed to be public could be crossing the development site.

Therefore, should any sewer be found during construction work, an investigation of the sewer will




be required to ascertain its ownership before any works commence on site. If this happens, please call our Customer Service Desk on 0330 303 0119

For further advice, please contact Southern Water, Southern House, Yeoman Road, Worthing, West Sussex, BN13 3NX (Tel: 0330 303 0119).

Website: southernwater.co.uk or by email at: SouthernWaterPlanning@southernwater.co.uk

Yours faithfully,
Future Growth Planning Team
southernwater.co.uk/developing-building/planning-your-development

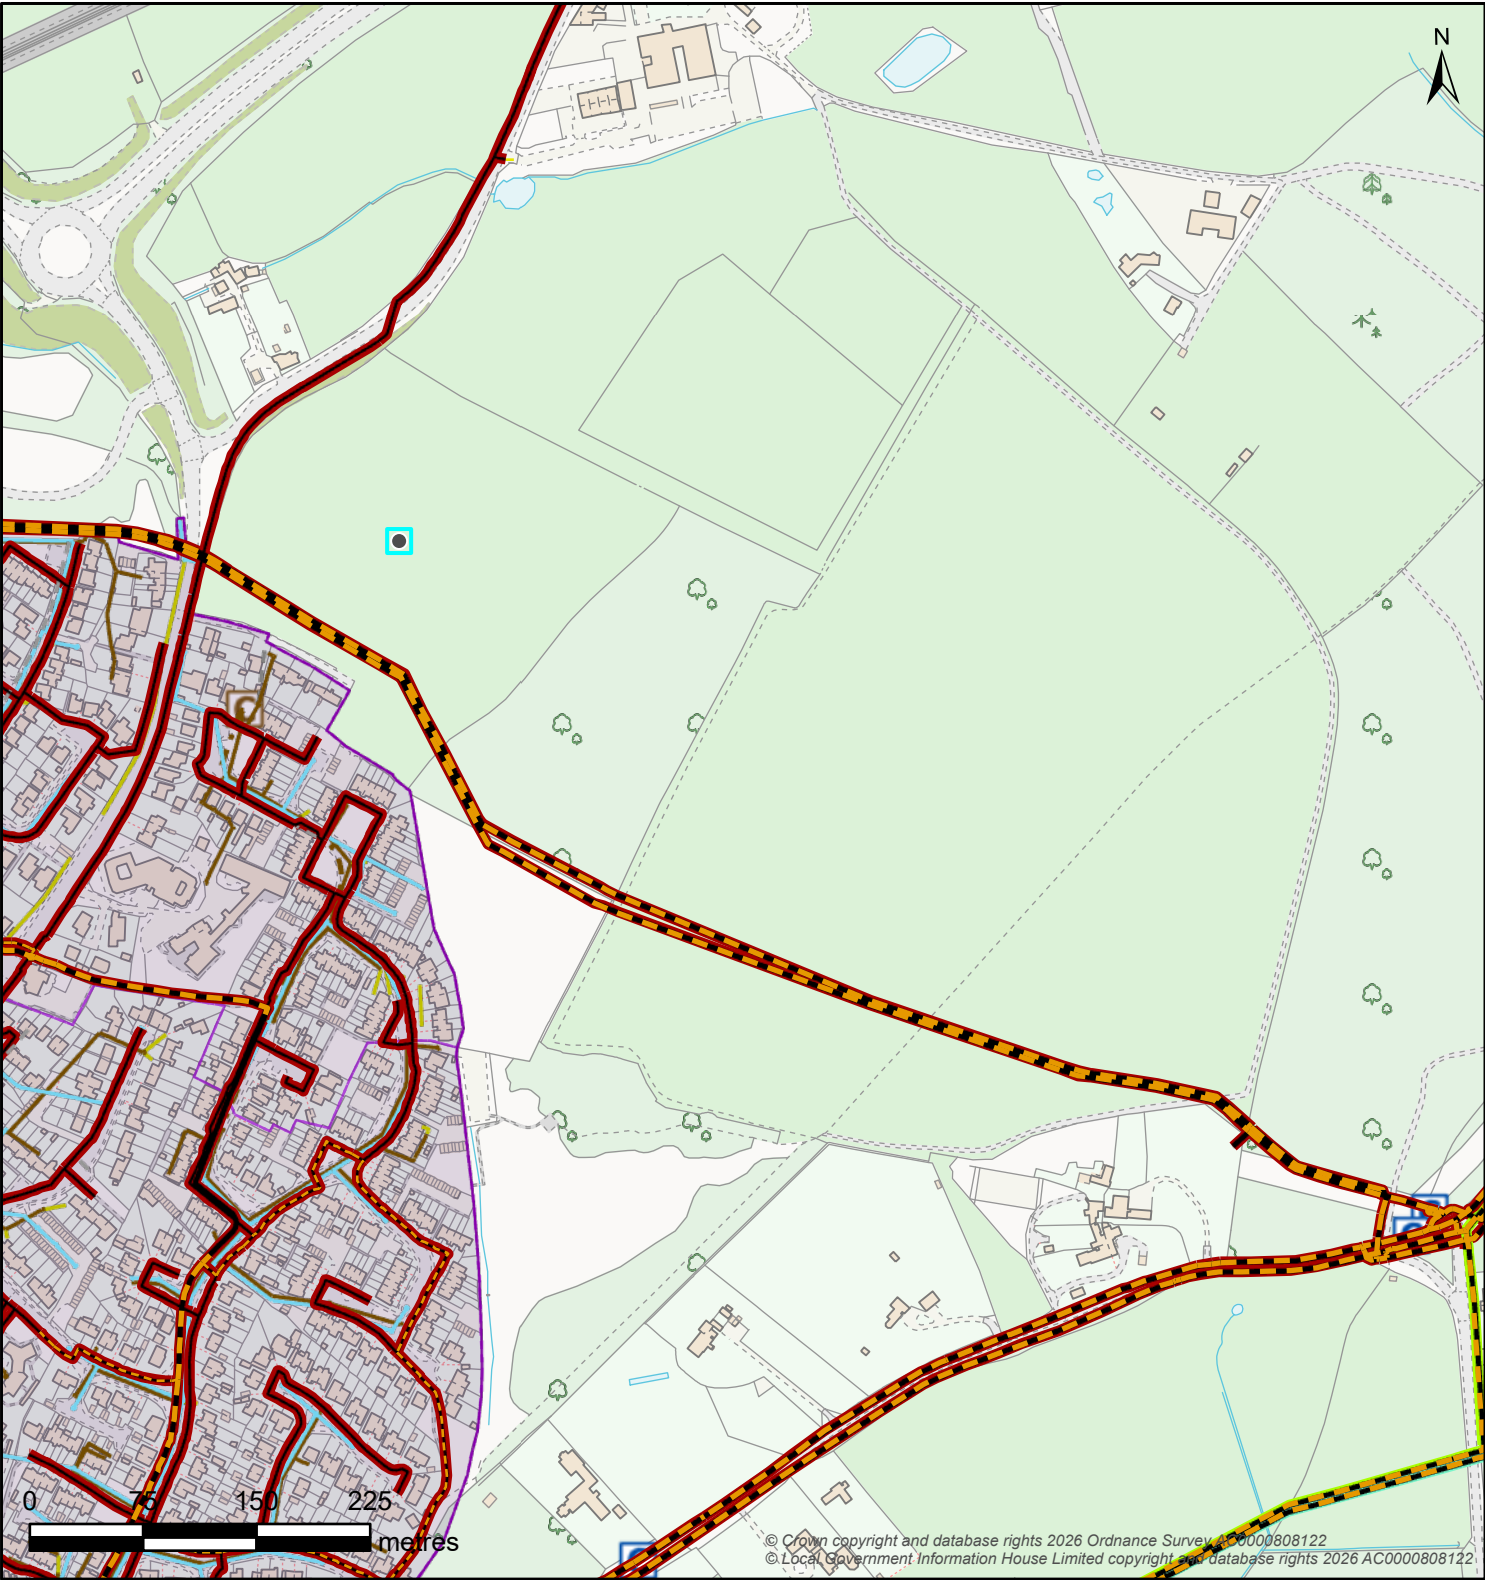

Map Title: SW Print

Printed By: Anne.McFarlane2
Date Printed: 28/05/2026
Map Scale: 5000

The information provided is believed to be correct but is provided on an 'as is' basis and without any warranty or condition express or implied, statutory or otherwise as to its quality or fitness for purpose. Actual positions of assets should always be determined on site.



Controllable Valve			Flow Control			Inlet-Outfall	
Damboards	Penstock	Valve	Anti Flood Device	Pumped Anti Flood Device	Reflux Valve	Inlet	Outfall
Manhole							
BIF Bifurcation	Cascade	CP Catchpit	Head Of Public Sewer	IC Interceptor Chamber	Manhole	S Soakaway	WO Washout
Outfall Headworks		Overflow Chamber		Pipe Bridge		Pumping Station	
Outfall Headworks	CSO Combined Sewer Overflow	Emergency Overflow	EMO Emergency Overflow	Pipe Bridge	Micro Pumping Station	Pumping Station	
Sewer Level Monitor		Storage		Treatment Works		Weir	
Sewer Level Monitor	Storm Tank	Tidal Storage Tank		Treatment Works	Weir	Wastewater Site	
Wastewater Pipe				Wastewater Use		Developer Services	
Culverted Water Course	Syphon	Tank Sewer	Trunk Sewer	Foul	Combined	Build Over Agreement	Section 104
Drain	Vacuum Main	Decommissioned Pipe		Sludge	Treated Effluent	Catchment	Sub-Catchment
Outfall				Surface Water			
Overflow				Private			
Rising Main							
Sewer							