

Z:\2898\Land North of Horsham\2898-5-DESIGN\2898-5-5-FRN DETAILS\2898-5-5-FRN-FRN-0006-P1 Illuminated Bollard.dwg

©David Jarvis Associates 2023



PRIVATE COLUMN / LANTERN


DW Windsor Ely B, Tear Drop U Bracket, 8 x 300mA 3K LED Array, A2 Optic RAL9005 Black Finish, 35lux Photocell on tubular column, height as specified on detailed design.



Not used in this application

PRIVATE UPLIGHTER

DW Windsor Ligman Kios 5, KI-60771-M-W30, on/off control, stainless steel finish

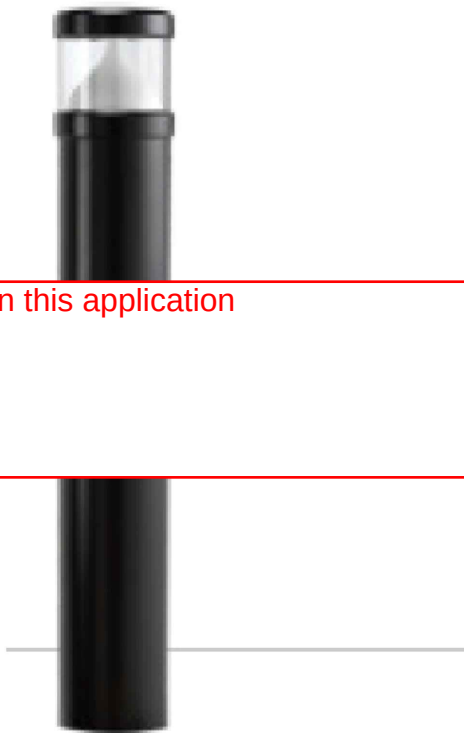

Not used in this application

PRIVATE COLUMN / LANTERN

DW Windsor Kirium illuminated bollard KB160 painted black finish

- PRODUCT DETAILS**
- Manufacturer: DW Windsor Ltd
Address: Pindar Road
Hoddesdon
Herts
EN11 0DX
- Telephone: 01992 474600
- Email: info@dwwindsor.co.uk
- Installation: To Manufacturer's recommendations and designs.
- Notes:
- 600 x 600mm cable access chamber as NAL Ltd or equal and approved
 - All ducting to be installed with a draw rope clearly labeled at both ends.
 - All ducting to be 100mmØ (internal) black polyethylene ducting a minimum cover of 450mm.
 - Cable marker tape must be installed 200mm above all service ducting.
 - Excavation within root protection areas to be undertaken by hand or under the supervision of a suitably qualified arboriculturalist
 - Private electric cable to be armoured. size of electric cable to be determined by contractor.
 - All lighting to be controlled by photocell and time clock

Drawing Revision				
Rev.	Date	Description	Drn	Ckd
P1	09/11/2022	First issue.	GR	PG
P2	18/03/2023	Amended to client comments	PG	PG
P3	30/03/2023	Amended to client comments	PG	PG
P4	11/08/2023	Amended to client comments	GR	PG

Status

DAVID JARVIS ASSOCIATES

DAVID JARVIS ASSOCIATES LIMITED
1 Tennyson Street Swindon Wiltshire SN1 5DT
t: 01793 612173
e: mail@davidjarvis.biz
w: www.davidjarvis.biz

Client
LEGAL & GENERAL (STRATEGIC LAND NORTH HORSHAM) LIMITED

Project
LAND NORTH OF HORSHAM

Drawing Title
LIGHTING

Scale		Sheet Size	Date Plotted	
NTS		A3	22/09/2023	
Client Ref.	Drawing Ref.	Drawing No.	Version	
-	2898-5-5-FRN	0005	S5-P4	