
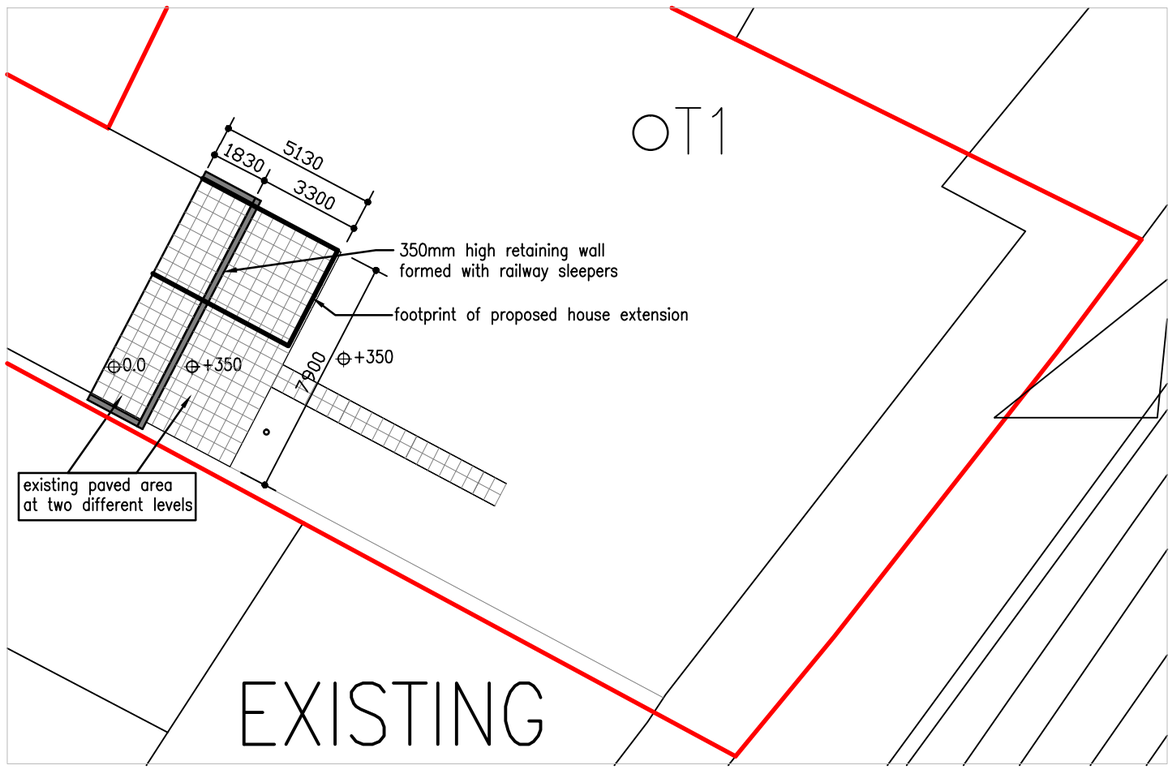


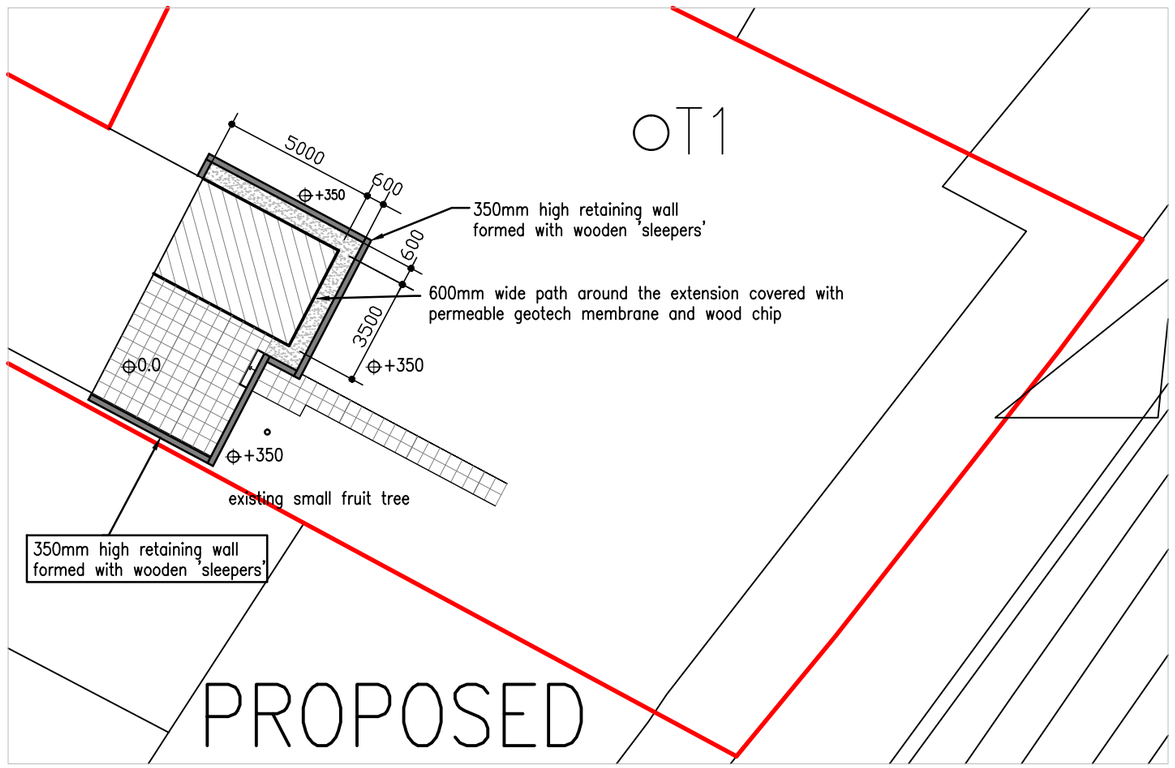


The proposed footings are trench footings at an estimated depth of 2.5m measured from the ground level, i.e. existing lawn at the back of the house.

The existing garden path is to be modified to the new retaining wall and a proposed step down to the paved patio, matching the level of the existing lower level patio.

There are no proposed foul drains required for this development. The rain water downpipes to be connected to the existing storm drains.

1:200



Block Plan 1:200

Carmichael Building Design Ltd.
Rosemary Cottage Pound Lane Mannings Heath
Horsham West Sussex RH13 6JL
t: 01403 252794

Client
Susan Towsey

Project
27 Cranham Avenue
Billingshurst
RH14 9EN

Drawing Title
Additional information to arboriocultural specialist

Sheet size A3
Scales 1:200

Rev– Issued 14.07.2025

Drawing No. 25607

Rev. –