


Lauriston

Dovetails

**North Elevation**




**East Elevation**




**South Elevation**

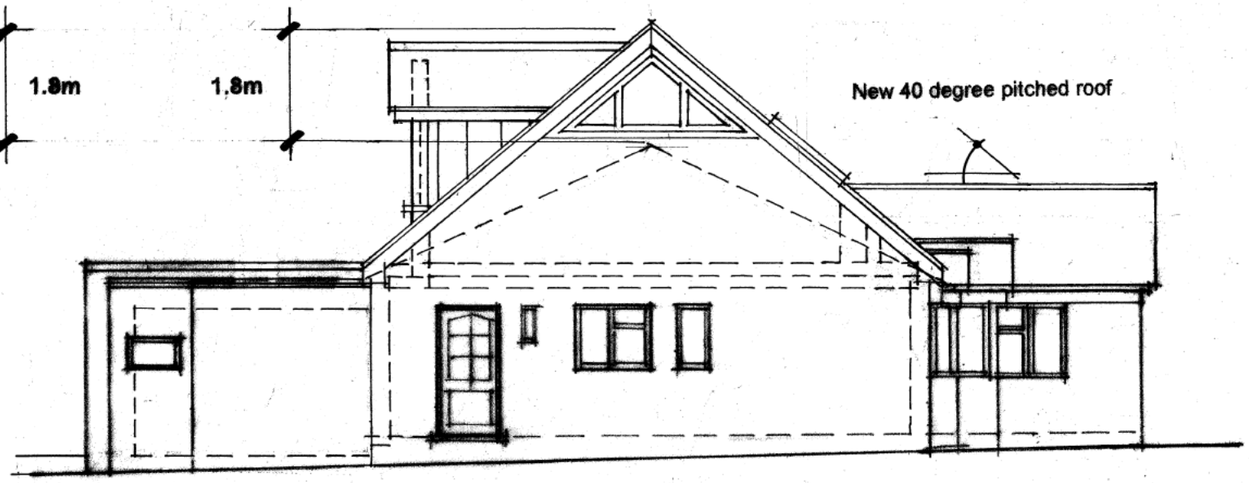


**West Elevation**

# Proposed Elevations

0 1 2 3 4 5 **1:100 scale**

**Proposed materials for roof alterations and new porch at Dovetails, West End Lane, Henfield, West Sussex BN5 9RA.**
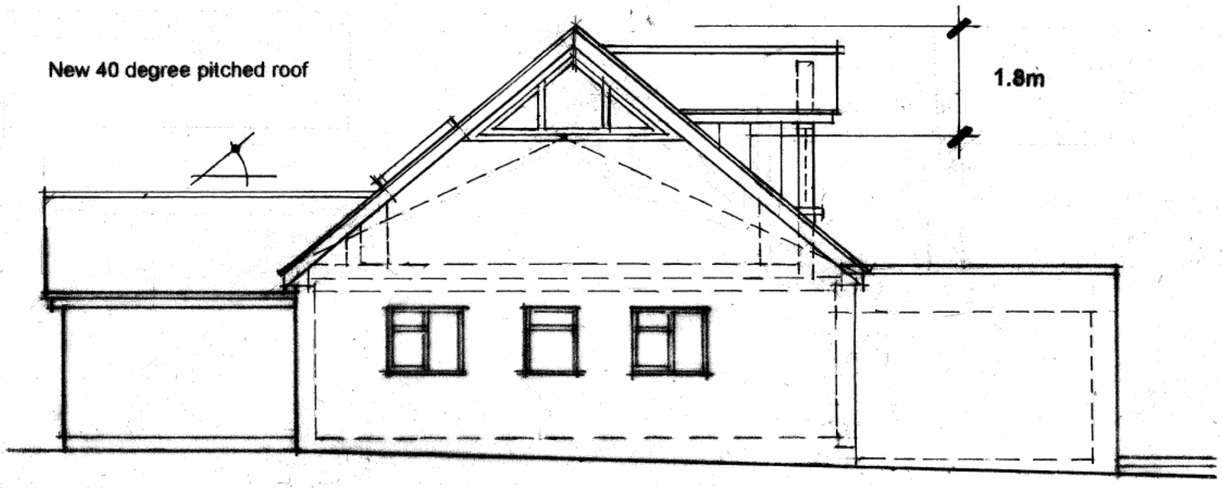
| | |
|---|---|
| **Gable-End Walls** | Brickwork to match existing house bricks or sand/cement rendered finish on new blockwork with painted finish. |
| **Roof** | Proposed concrete/clay tiles to match existing or slate tiles suitable for a new 40 degree pitch roof. |
| **Windows** | Proposed powder coated Aluminium or UPVC casement windows with toughened double-glazed units. |
| **Porch** | Brickwork to match existing house bricks or sand/cement rendered finish on new blockwork with painted finish. |
| **Rooflights** | Velux Ltd roof lights with white polyurethane internal finish with motorised control. |
| **Dormer Window construction** | Proposed timber frame dormer window construction with Lead cheeks to dormers with powder coated Aluminium or UPVC windows with toughened double-glazed units. Concrete/clay tiled or slate tiled pitched roof to dormers. |
| **Gutters and Downpipes** | 1/2 round galvanised steel or aluminium guttering or UPVC to match existing on UPVC fascia, with 68mm dia galvanised steel or aluminium or UPVC downpipes and brackets. |


rea richard ewen architects

The Moat House, 38A Beacon Road, Ditchling, Hassocks, West Sussex, BN6 8UZ
Tel/Fax: 01273 845096 [redacted]
email: info@richardewenarchitects.co.uk


| | |
|---|---|
| **Client:** Mr & Mrs Robert Selley | |
| **Project:** Dovetails, West End Lane, Henfield, West Sussex BN5 9RA. | |
| **Title:** Proposed Elevations 1:100 scale @ A3 | |
| **Scale:** 1:100 | **Date:** 18th March 2024 |
| **Dwg. No:** REA/658/06 | **Rev:** A |

Planning Application to HDC