Wavin Stormwater Management

wavin

CONNECT TO BETTER

Wavin Stormwater Management

Project Details

Project Name	LDS593	**Produced By**	Jon Latham
Client Name	Adam Fahey Design		
Site Address	Church Place, Pulborough, RH20 1AF	**Date**	18/06/2026

Modular Units and Tank Details - Primary Soakaway

Length	12m	12 units
Width	7.5m	15 units
Depth	0.8m	2 units
Total Number of Units		**360 units**

Void	95%
Cover Depth	876m
Installation Depth	876.8m

Recommended Unit

Wavin recommend using the following unit for your installation.

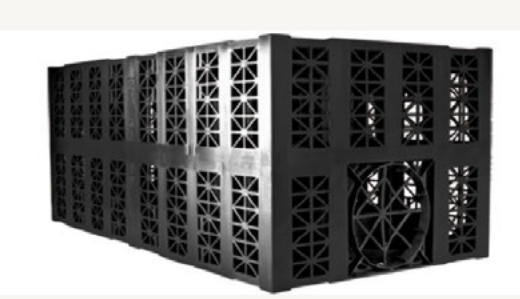

AquaCell Core R

Product Number: 6LB150
AquaCell Core R has been designed for use in deep applications, subject to both regular and heavy traffic loadings, such as cars and HGV's (for vehicles up to 44 tonnes).

Other Unit(s)

The following unit(s) can also be used with, or in place of the recommended unit.

If you would like to find out how to purchase, please contact your Area Sales Manager

Local Sales Manager

Name	John Nichols
[redacted]	[redacted]

Site Sales Manager

Name	Stuart Pluck
[redacted]	[redacted]

Aquacell Disclaimer

- All information generated by this tool is supplied in good faith and without charge to enable reasonable assessment of the practical performance of Wavin products.
- Wavin offers a program of continuous improvement and reserves the right to modify the specification of products without notice.
- All information in this publication is believed to be correct at time of preparation. However, no responsibility can be accepted for any errors or omissions. Final determination of the suitability of information or material for the use contemplated and the manner of the use is the sole responsibility of the user
- Calculations are based upon relevant industry standards in accordance with the Wallingford Procedure, and should be verified by a qualified engineer.